

LED Recessed Gimbal Luminaire 3.5 Inch

G-19999

G-20000



ITEM	G-19999		
DESCRIPTION	R3/14W/GR/LED/SCCT	CRI	>90
COLOR TEMP	27, 30, 35, 41, 50k	CUTOUT	3.62
OUTPUT LUMEN	1400	OD	4.17
TRIM FINISH	WHITE	HEIGHT	3.00
WATTAGE	14W	INPUT VOLTS	120/227V
mA	340mA	OUTPUT VOLTS	33-38V
EQUIV WATTAGE	125W	DIMMABLE	TRIAC OR 0-10
PLENUM RATED	FT6		

ITEM	G-20000		
DESCRIPTION	R3/14W/GR/LED/SCCT BK	CRI	>90
COLOR TEMP	27, 30, 35, 41, 50k	CUTOUT	3.62
OUTPUT LUMEN	1400	OD	4.17
TRIM FINISH	BLACK	HEIGHT	3.00
WATTAGE	14W	INPUT VOLTS	120/227V
mA	340mA	OUTPUT VOLTS	33-38V
EQUIV WATTAGE	125W	DIMMABLE	TRIAC OR 0-10
PLENUM RATED	FT6		



Dimmable:
5%



Lifetime:
50 000 hours



Warranty:
3 years



Pack: 18



Multi Volts:
120-277V



TEMPERATURE



BEAM
ANGLE
60°



30° TILT
ANGLE



CRI 90+
TRUE
COLORS



IC
RATED



WET
LOCATION



AIR
TIGHT



ETL
US




FCC

Dimmer List

BRAND	SERIES	MODEL	LODAL	BRAND	SERIES	MODEL	LODAL
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PHLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W		ILLUMATECH	IPL06	150W
		SCL-153P	150W	LEVITON	SURESLIDE	6672	150W
		S-600P	600W			6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCV6	150W
		PD-10NXD	250W	GE	ROCKER	10464	150W
	DIVA	DVCL-153P	150W		TOGGLER	18027	150W

Diagram

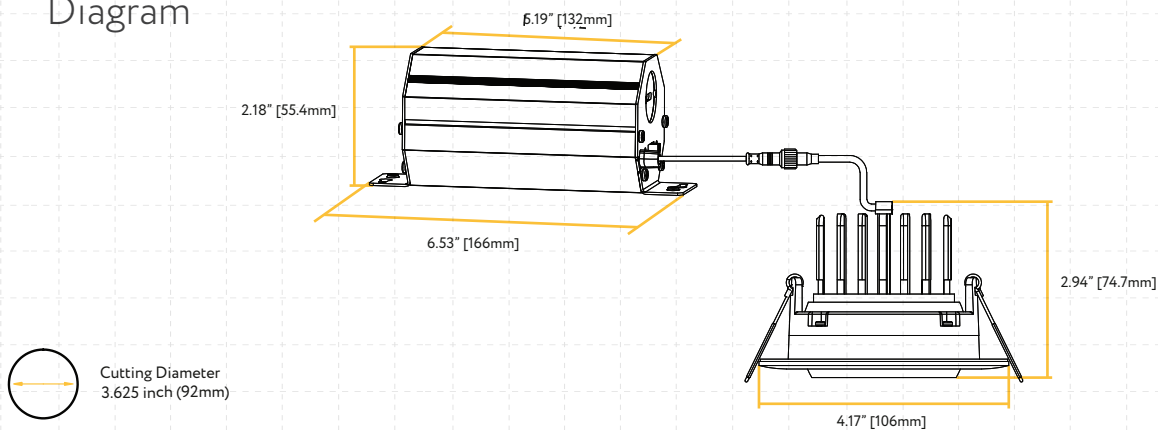

Accessories

Emergency LED Driver

- 15W G-48410
- 30W G-48411
- 25W G-95525
- 60W G-95521



Extension Cords

- G-20247 5ft
- G-20248 10ft
- G-19822 20ft
- G-19823 30ft



New Construction Plate

Need Use G-19981 / 2 Punch Out



Multi Driver Converter

Use with G-95825 14W



Clear Lens

G-25621

G-25622



SN/L3.5/40-DEGREE

SN/L3.5/60-DEGREE