



RGBCCT Downlight Controller

Product Information

Model	G-99719
Energy	Battery Included
Control Distance	100 FT
Max. Device Control	Limitless
Total Zone	4
RGBCCT	RGB-16,000,000 Colors- CCT 27-65K




Dimensions

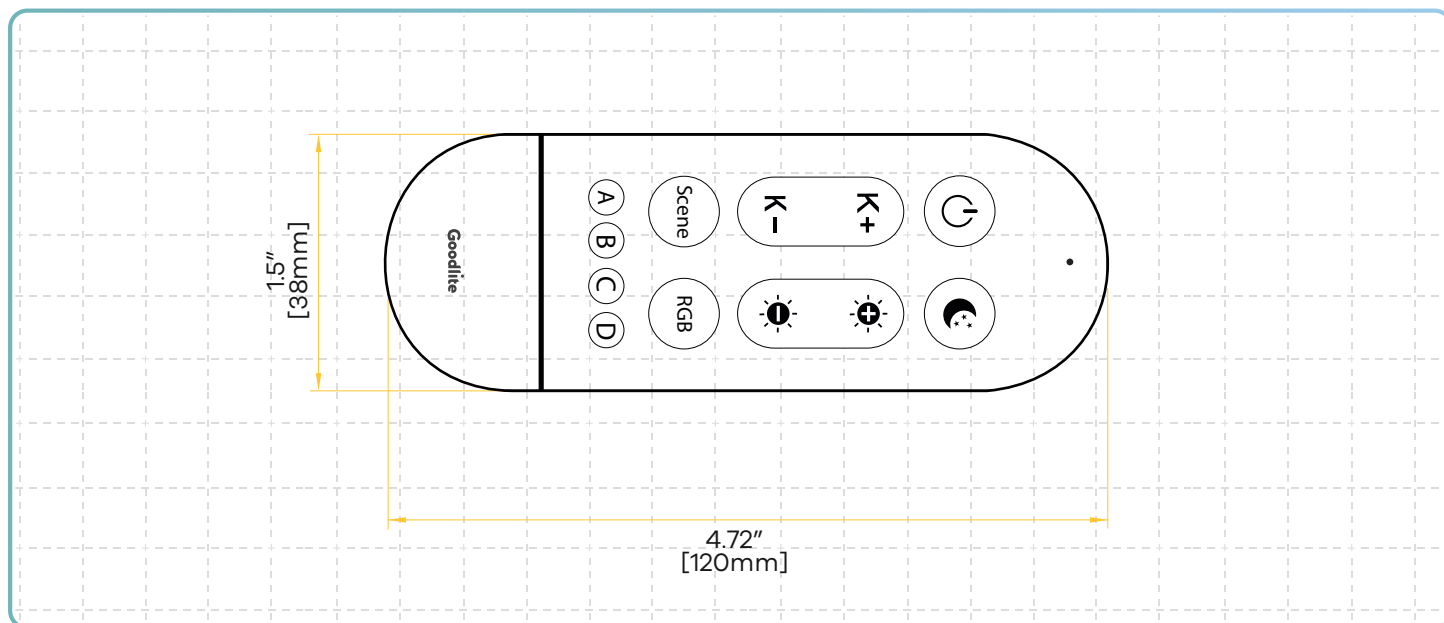

Remote Guide

	Description	Function
A	Power Switch	Turns lights on or off
B	Night Lamp	Activates a soft night light <small>(used to set timer mode)</small>
C ₁	K+	Increases color temperature ₁ <small>(in steps or gradually)</small>
C ₂	K-	Decreases color temperature ₂ <small>(in steps or gradually)</small>
D ₁	₁ Brightness +	Increases brightness ₁ <small>(in steps or gradually when held)</small>
D ₂	₂ Brightness -	Decreases brightness ₂ <small>(in steps or gradually when held)</small>
E	Scene Selection	Cycles through presets <small>Good Night, Reading, Working, Relax.</small>
F	RGB Color Mode	Cycles through colors <small>(Red → Orange → Yellow → Green → Cyan → Blue → Purple)</small>
G	Group A	Assigns or control lights <small>(Group A)</small>
H	Group B	Assigns or control lights <small>(Group B)</small>
I	Group C	Assigns or control lights <small>(Group C)</small>
J	Group D	Assigns or control lights <small>(Group D)</small>

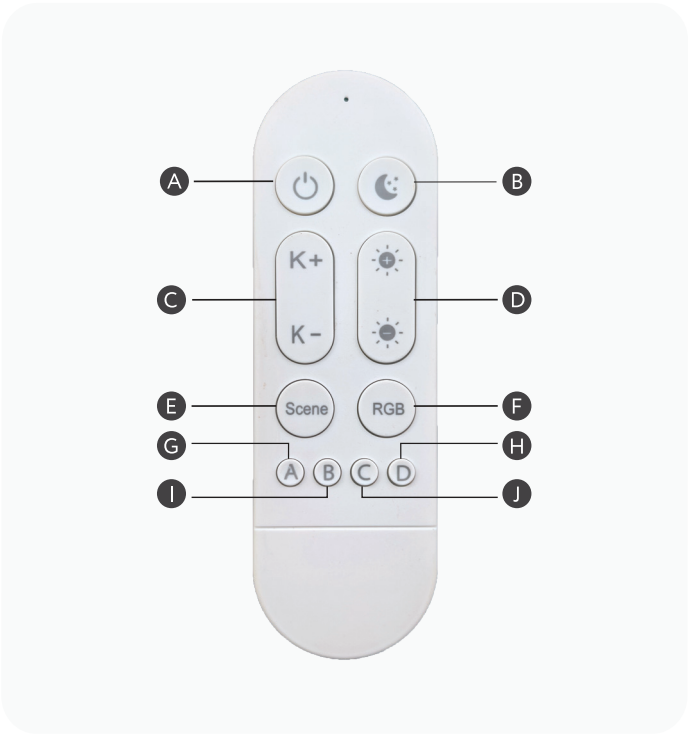


RF

RF Linking Instructions

- 1 Turn on the light

2




Within 30 seconds, press and hold of the Group buttons - A, B, C, or D - for more than 5 seconds.

- 3 The indicator light on the remote will flash, confirming the light has been added to the selected group.

RF Unlinking Instructions

- 1 Turn on the light

2




Press and hold the same Group bottom (A, B, C or D) for more than 5 seconds.


- 3 The light will be removed from that group.

WiFi Linking Instructions

1. Turn the light on and off 5 times -on-off-on-off-on-off-on-off-on.
2. Wait until the light blinks quickly
3. Then open the app and link the light if the device hasn't been recognized then click + and add manually.
4. Once linked to the app, the remote can be paired.

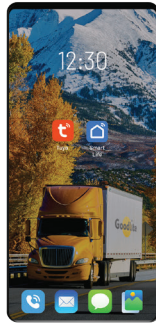


Install / Login to the app

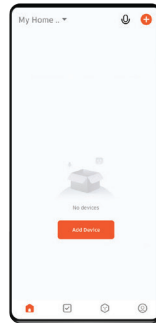


Enter the Tuya app & add the Controller



Once Controller has been recognized Tap device symbol to be added

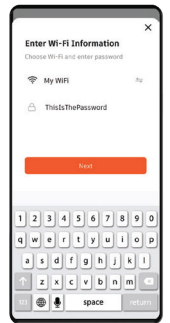


Enter your Wi-Fi information

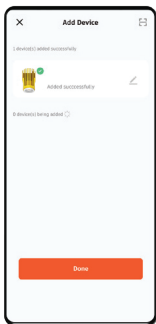

Once device has been successfully added. Tap "Done" to enter device control.




You have successfully entered the device control. Tap on symbol to turn on the light.

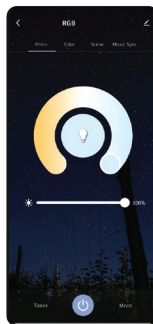


CCT CONTROL



RGB CONTROL

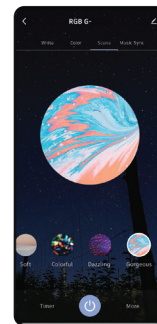


RGB PRESET SCENE

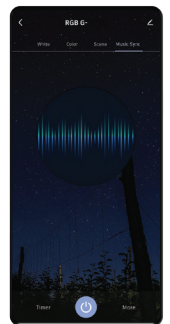


RGB MUSIC SCENE

Grouping Multiple Controller Instructions

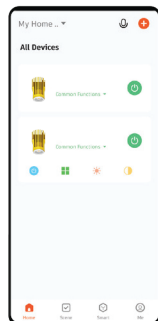


Open the app to home screen & select '+' controller symbol

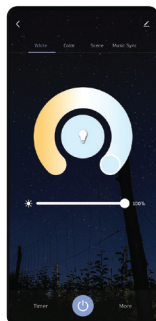


Tap the edit button located in the right top corner




Select create group option

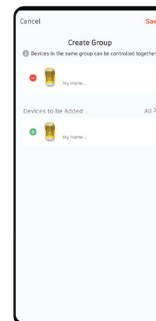


Add the controller's you'd like to have in the group

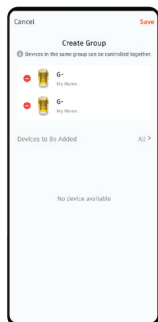


Once selected tap save located in the right top corner

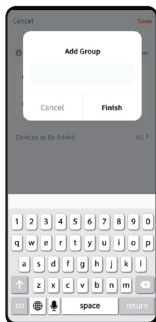


Rename the group to your liking

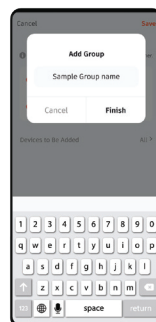


Tap finish once renamed

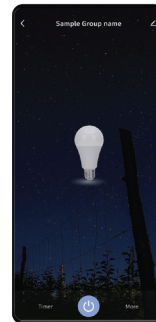


You have successfully created and entered the new group

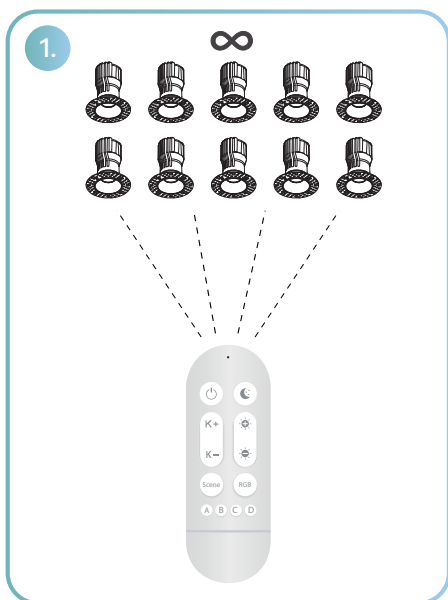

1. One Zone can synchronously control unlimited controllers, as long as each controller is within 100FT of the next.

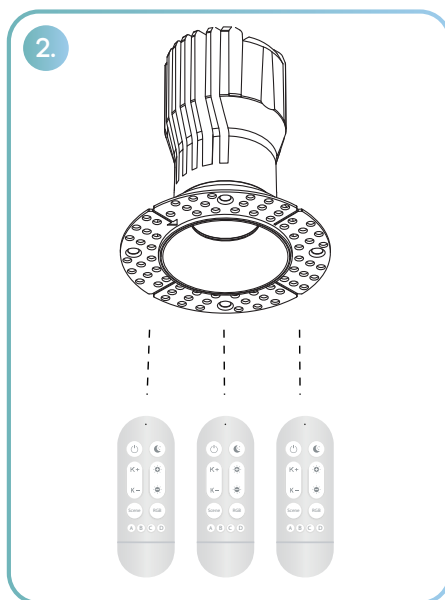

2. One downlight can be controlled & linked simultaneously to up to 3 other remotes.

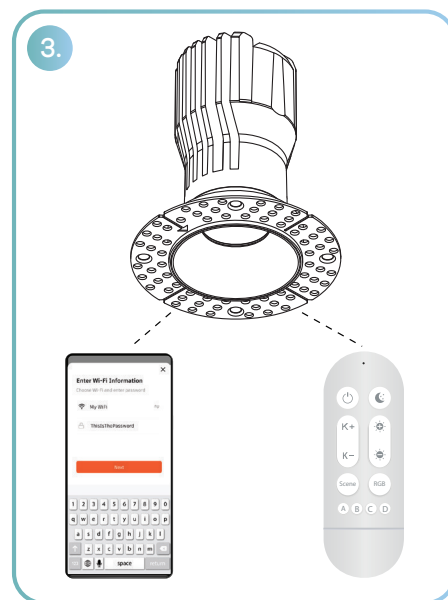

3. One downlight can be controlled & linked simultaneously via WiFi App & RF remote.