


Vertical Step Light Motion Sensor + Photocell

Installation Instructions

- IMPORTANT** Read all instructions before installing plate. Retain for future reference.
- SAFETY:** Turn the power off at main fuse/breaker panel before attempting any electrical work. This luminaire must be wired in accordance with local electrical codes and ordinances. Grounding connections should be done in the detachable junction box.
- WARNING:** Make sure the power is OFF from the electrical panel before starting installation or attempting any maintenance.
- ATTENTION:** This product is not dimmable.

ITEMS INCLUDED IN THE BOX

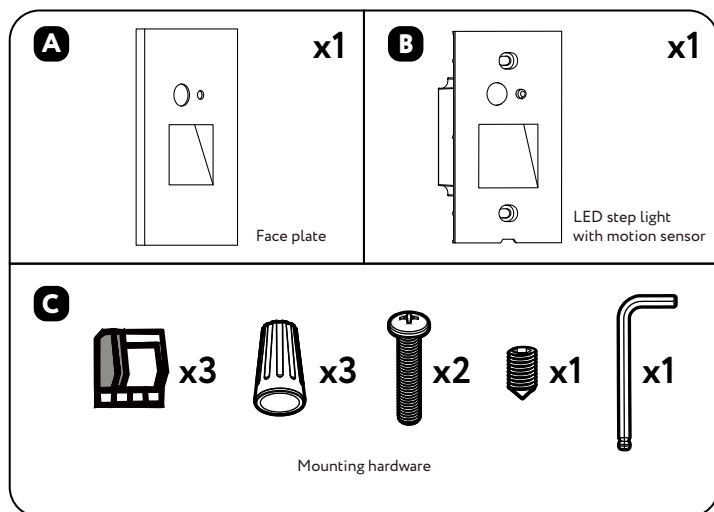




BEFORE STARTING INSTALLATION, SHUT THE LINE FEED POWER OFF USING THE CIRCUIT BREAKER.

Instructions pertaining to a risk of fire, electric shock or injury to persons. Installation must be done according to local electrical codes. Installation must be done by a qualified electrician.

INSTALLATION STEPS

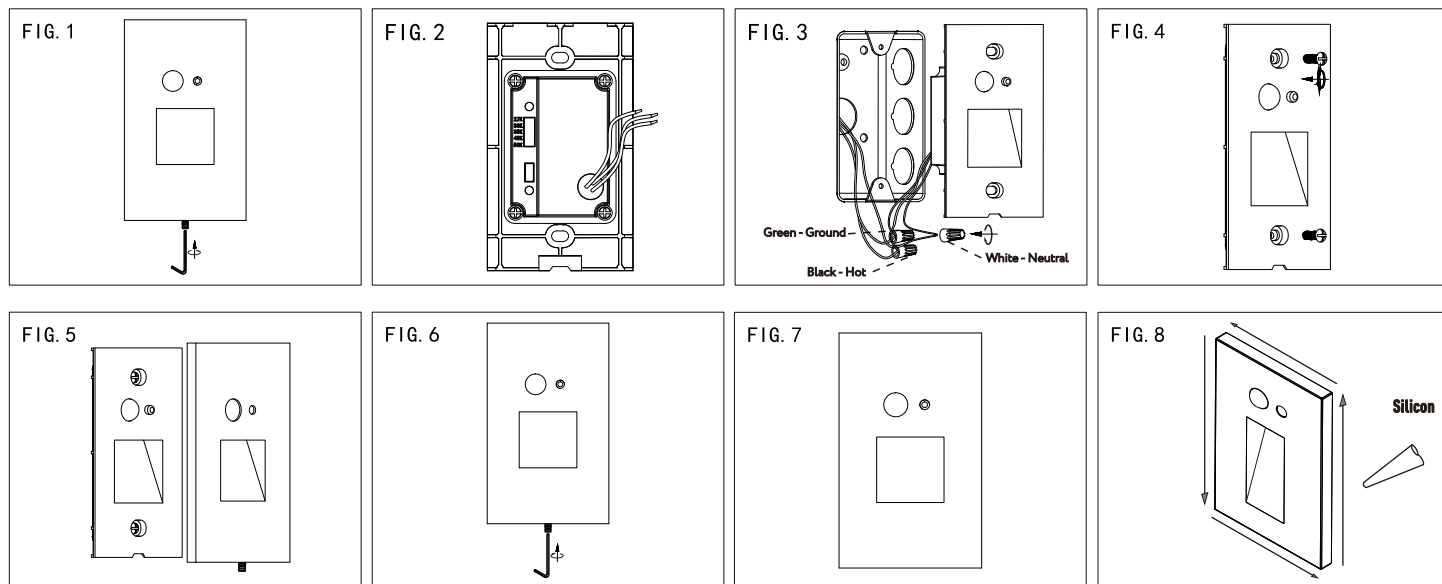

FIXTURE INSTALLATION:

2" x 4" boxes to have minimum inside dimensions of 3"H x 2"W x 2"D in order to accommodate

NOTE: Actual depth of box to be determined in accordance with the NEC and local ordinances. Indoor or outdoor frame mounted junction box: Raco 2" x 4" (6.5 cu. in) or equivalent recommended outdoor surface mounted junction box. Use appropriate junction box suitable for that particular application.

1. Unscrew the locking screw, then remove the face plate.(Fig.1)
2. Choosing your desired CCT and sensor function on back of the fixture.(Fig.2)
3. Connect the fixture wires to the junction box wires as follows: Black fixture wire to black (hot) junction box wire, white fixture wire to white (neutral) junction box wire, green fixture wire to ground. (Fig.3)
4. Safely place all wiring and connections back into the junction box.
NOTE: For outdoor installation, it is recommended that the installer run a bead of clear, outdoor-rated silicone caulk between gasket or back of fixture and mounting surface to prevent seepage of water into fixture.
5. Use the two mounting screws to fix the fixture to the junction box. (Figure 4)
6. Hook the face plate on the top edge of the fixture, then tighten the locking screw.(Fig.5 & 6)
7. For outdoor installation, seal with silicon (not included)around the face plate. (Fig.7)
8. Turn power back on.

MANUFACTURER'S LIMITED WARRANTY

Your Product, when delivered to you in new condition and in original packaging, is warranted against defects in materials and workmanship as follows for a period of 3 years from the date of the original purchase. Defective products returned and proven to be defective upon inspection will be repaired, replaced with a new Product or a credit will be issued against original invoice at the discretion of manufacturer.

To avoid any doubt, "the replacement Product" does not include any removal or installation costs or expenses, including without limitation labor costs or expenses, shipping costs to return defective products or any damages that may occur during the return of product. This limited warranty is subject to the following additional conditions:

1. Products must have been installed and operated in accordance with manufacturer's instructions.
2. Products have not been subjected to accident, neglect, abuse, misuse, lightning, electrical surges or acts of God.
3. The Product has been purchased directly from an authorized distributor.
4. Purchase receipt or invoice is available for inspection.
5. This warranty is limited to Products purchased for use in regions that are within jurisdiction of Canada and USA.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

THE FOREGOING WARRANTY IS EXCLUSIVE, AND THE SOLE REMEDY FOR ANY AND ALL CLAIMS. IN NO EVENT WILL THE MANUFACTURER BE LIABLE FOR ANY SPECIAL, COMPENSATORY, INDIRECT, PUNITIVE, OR INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING, WITHOUT LIMITATION, DAMAGES RESULTING FROM LOSS OF USE, PROFITS, BUSINESS OR GOODWILL, WHETHER OR NOT THE MANUFACTURER HAS BEEN ADVISED OF THE POSSIBILITY THEREOF.