


Jupiter 3.0"

Round Universal Cylinder - Black

Product Information

Color temp	27,30,35,41,50K
Output lumens	1800
Beam angle	40° Clear (Default)
Input volts	120-277V
Wattage	20W
Height	6.30"
Width	3.07"
CRI	90+
Dimmable	Triac or 0-10V
Pack	18

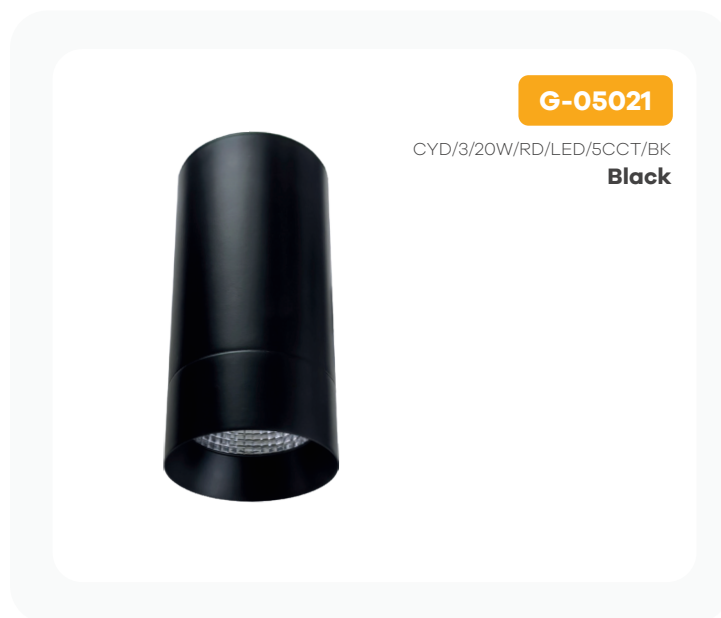

3.0" Beam Adjustable Cylinder is compatible with mounting accessories listed below

Lens Options

Reflector



G-05821
CYD/L3/24-DEGREE



G-05822
CYD/L3/40-DEGREE

Frosted Lens



G-05820
CYD/L3/FROSTED/50°

Diffuser



G-21440
HEX/HC/DIFFUSER

Lens Cover




G-21427
SOLITE LENS



G-21428
PRISMETAC LENS



G-21429
BEAMSPLIT LENS



Accessories



Emergency LED Driver

25W G-95525
30W G-48411
60W G-95521



New Construction Plate

G-19975 (1) Punch Out
To use with Recessed Mount Installation



G-05210 10FT Pendant Cord


Compatible with
Pendant Options

Mounting Options




G-05229

CYD/3/RCM/JB
**Recessed Mount
J-Box**
CUT OUT 2.36"



G-05228

CYD/3/TL/MP
J-Box Mud Plate



G-05420

CYD/3/RD/SM/BK
**Surface Mount
Canopy**



G-05325

CYD/3/RD/CM/BK
**Conduit Mount
Canopy**



G-05421

CYD/3/RD/SM/PDT/BK
**Surface Mount
Pendant**
8FT Adjustable

Up-light 200 Lumens



G-05422

CYD/3/RD/RCM/PDT/BK
**Recessed Mount
Pendant**
CUT OUT 2.36"
8FT Adjustable

Up-light 200 Lumens



G-05423

CYD/3/RD/SM/STM/BK
Surface Mount Stem
4x12"



G-30071

CYD/3/RD/MP/SM/BK
**Surface Mount
Monopoint**



G-30061

CYD/3/RD/MP/RCM/BK
**Recessed Mount
Monopoint**
CUT OUT 2.36"




G-30081


TR/3/H/ADAPTER BK
H Track Adapter

Dimensions: Dimensions below, display the Fixed cylinder with mounting accessories combined. Beam Adjustable cylinders dimensions can be found on its spec sheet.


G-05229

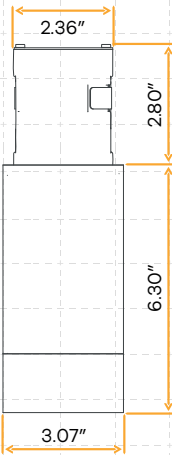


G-05228

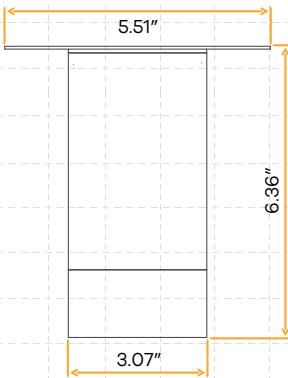


G-05420

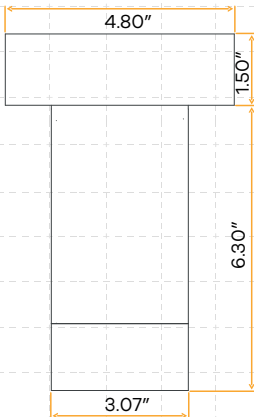


G-05325

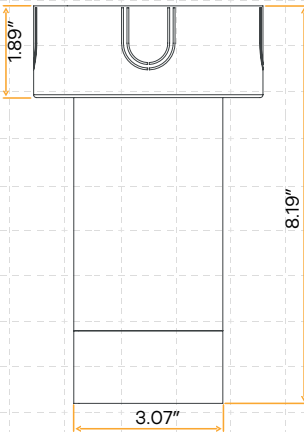

G-05421

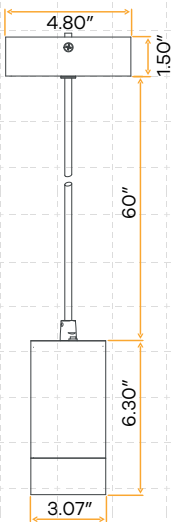

G-05422




Dimensions


G-05423



G-30071

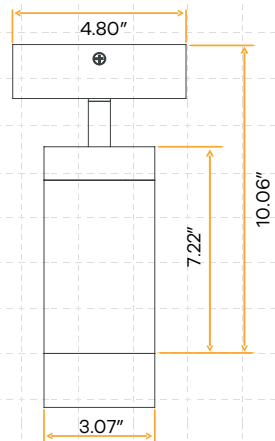

G-30061

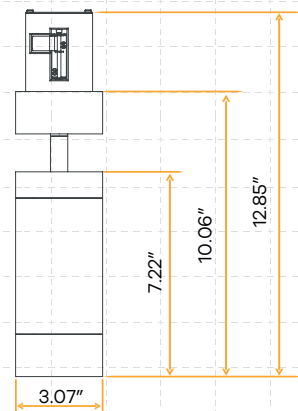

G-30081

