

# GLAWRE' SURFACE MOUNT

## Installation Manual

### Important Safety Information

#### WARNING: RISK OF SHOCK

House electric current can cause painful shock or serious injury unless handled properly. For your safety, always remember to:

- Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

#### WARNING: RISK OF CUTS


Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.

Account for small parts and destroy packing material, as these may be hazardous to children.


### Product Specification

MODEL	SIZE	WATTAGE	VOLTAGE	RATED INPUT FREQUENCY	DIMENSION
G-12042	4" W X 2' L	22W	120-277VAC	50/60 Hz	100x607x26.5mm
G-12043	4" W X 3' L	20W/25W/30W	120-277VAC	50/60 Hz	100x900x26.5mm
G-12044	4" W X 4' L	20W/30W/40W	120-277VAC	50/60 Hz	100x1213x26.5mm
G-12062	6" W X 2' L	22W	120-277VAC	50/60 Hz	150x607x26.5mm
G-12063	6" W X 3' L	20W/25W/30W	120-277VAC	50/60 Hz	150x900x26.5mm
G-12064	6" W X 4' L	20W/30W/40W	120-277VAC	50/60 Hz	150x1213x26.5mm


# Installation Diagram

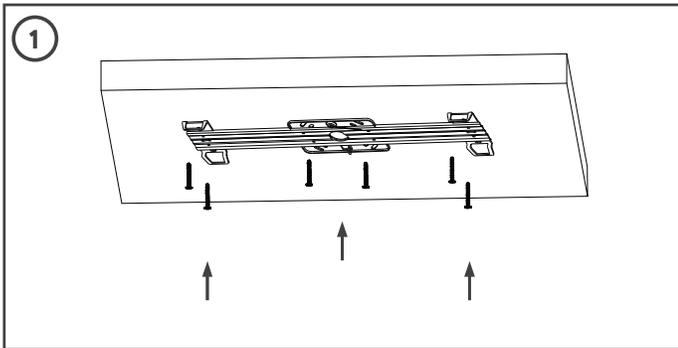


**STEP 1:** Turn off the power supply. Push one side of the bracket horizontally to take out the bracket from the fixture. Position the bracket in place over the J-Box. Mark the 4 mounting holes for the anchors on the ceiling using the bracket as a reference. Drill holes mount provided anchors, then secure screws into anchors. Attach the bracket to junction box by using the 2 screws provided.

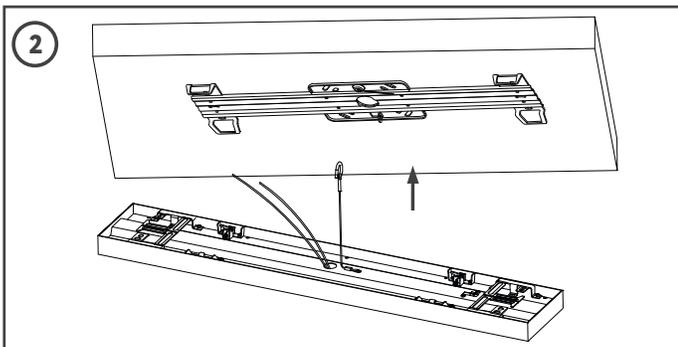


**STEP 2:** Clip on and lock the safety cable of the fixture to the bracket.

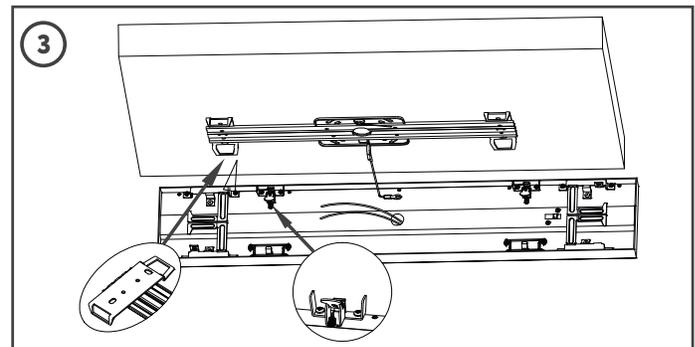


**STEP 3:** Lift the fixture up to the ceiling, one side of the fixture has hooks, lock on the hooks on the fixture to the bracket.

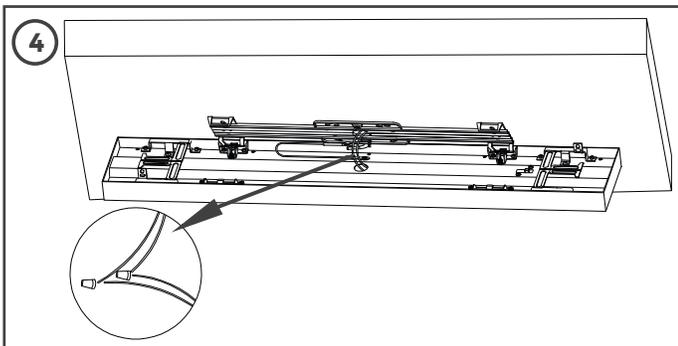


**STEP 4:** Connect power wire of the fixture to the power wire from Junction box.

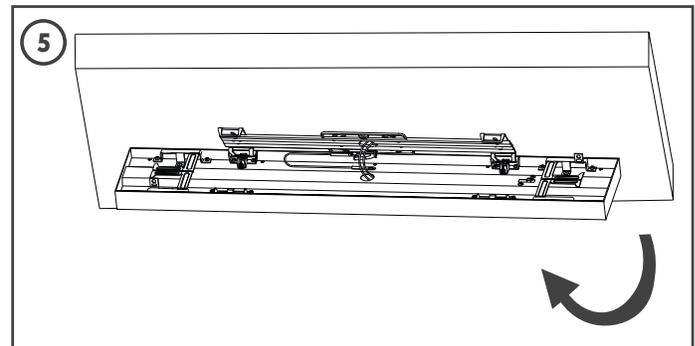

**STEP 5:** Push the light fixture up into the direction shown in this picture, the spring clips will automatically lock the bracket.

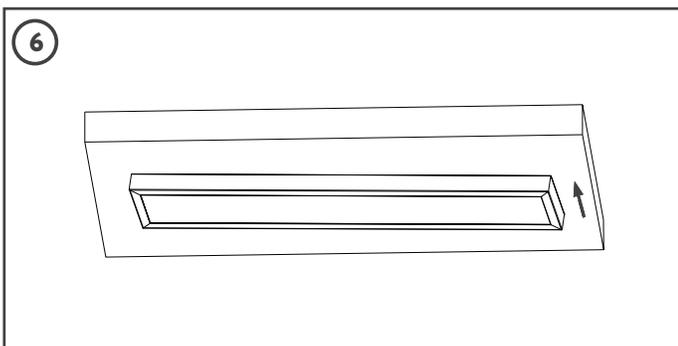


**STEP 6:** Slide the fixture left to center into the direction shown in this picture.

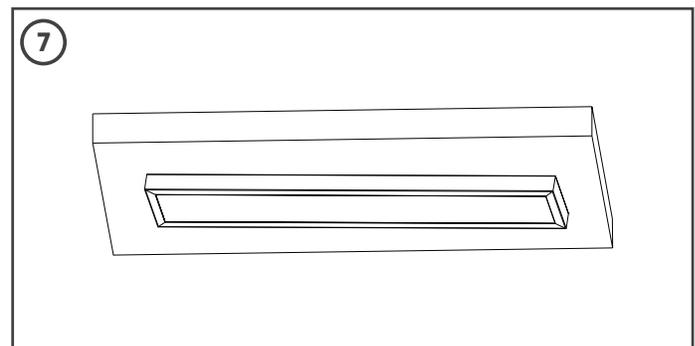


**STEP 7:** Inspect to ensure the light fixture is well installed. Turn on power after installation is completed.


# Uninstallation Diagram

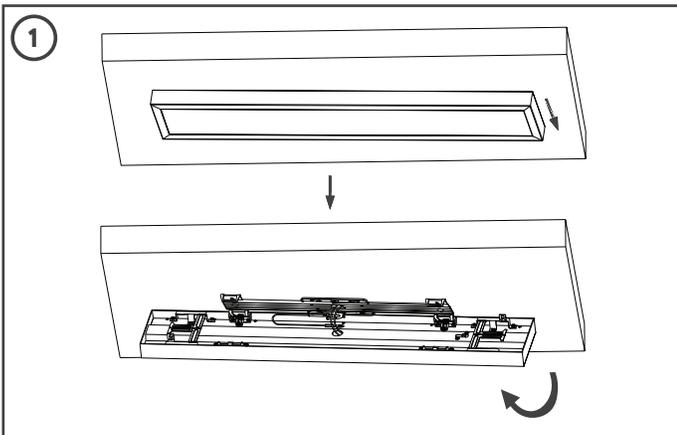


**STEP 1:** Turn off the power supply. Push the fixture horizontally into the direction shown in this picture and one side of the fixture will automatically unlock.

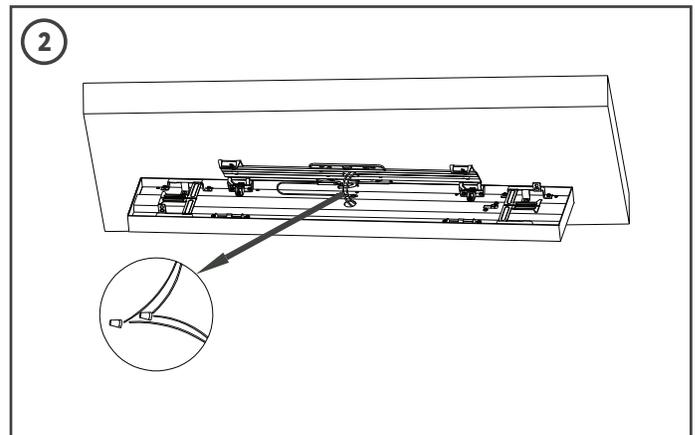

**STEP 2:** Disconnect power wire of the fixture to the power wire from Junction box.

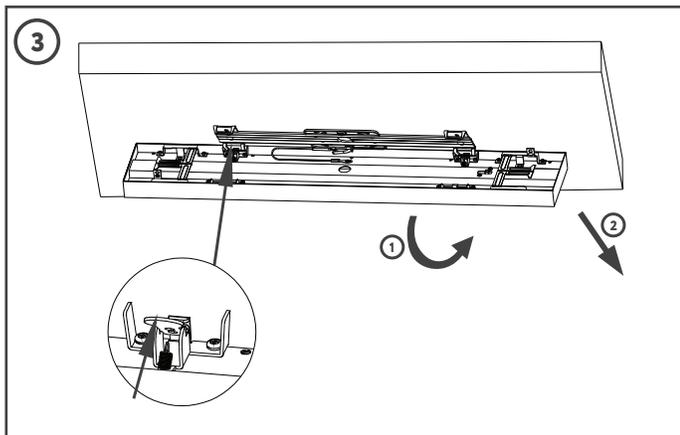


**STEP 3:** On the other side of the fixture, there are two spring clips. Lift the spring tabs upward to unlock the fixture.

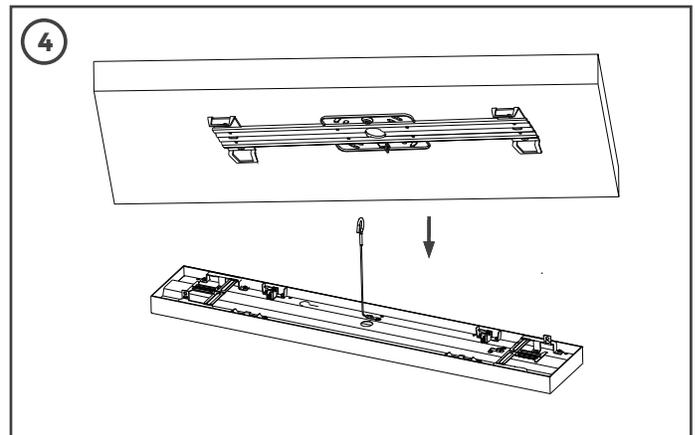

**STEP 4:** Detach the safety cable and remove the fixture.

## Dimming Diagram

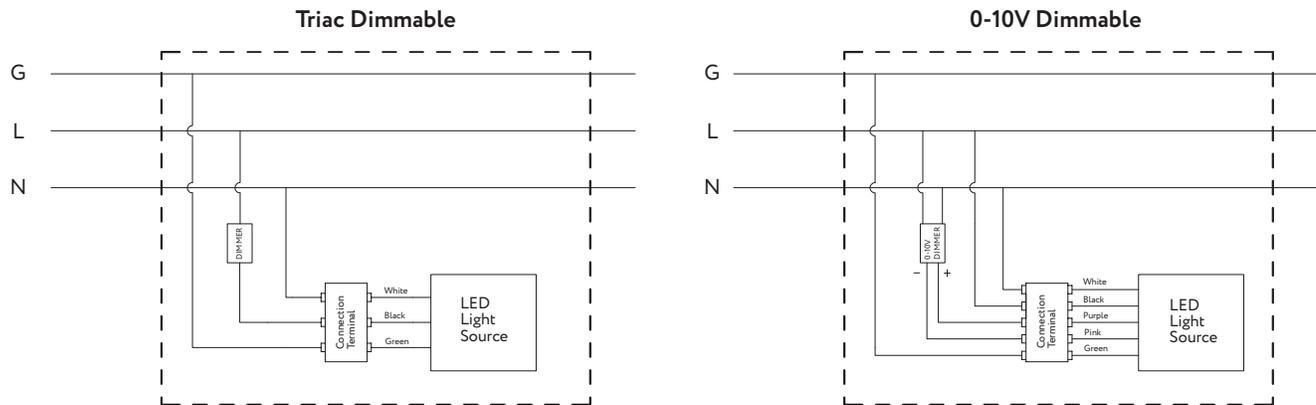

## CAUTION

### WARNING: RISK OF FIRE

Use AC120-277 50/60Hz circuits.

Suitable for damp locations. Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electrical wiring experience, please refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. Reliable temperature is -20 to +40 degrees Celsius (-4 to +104 degrees Fahrenheit).

Please obey fire prevention regulations, do not cover the fixture with any heat insulated materials.

Do not change the LED light source or driver inside under any circumstance.