



White Flanged Trim (2700K, 98CRI, 35°-Clear, 28W)

Polar Plot

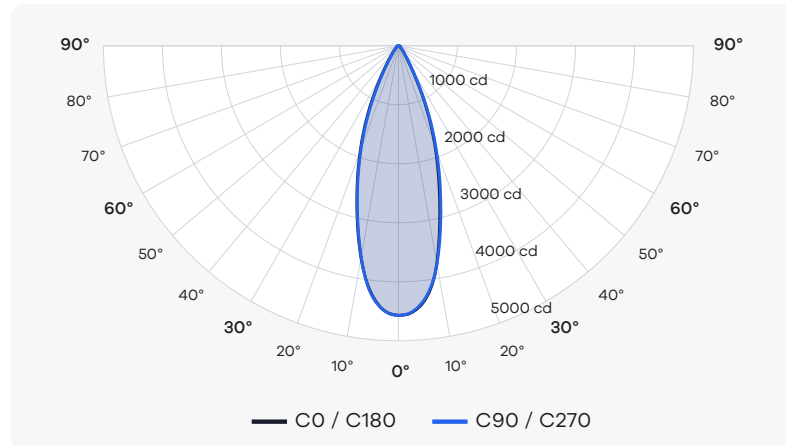

Cone of Light Tabulation

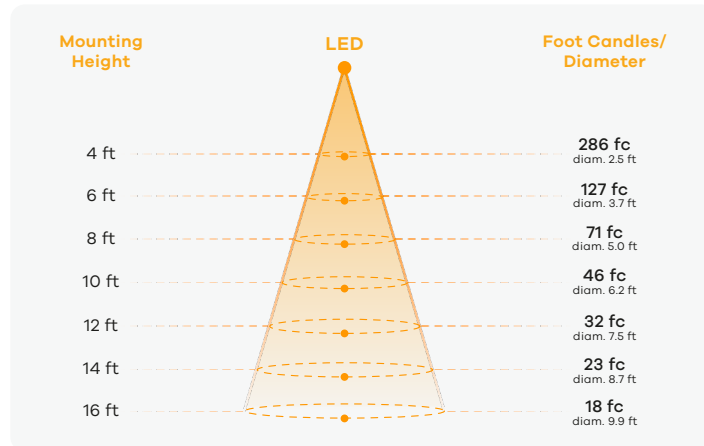

Power Information


Voltage	119.67 V
Current	0.2306 A
Power	27.1 W
Power Factor	0.9816

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1938 LM		0 - 40	1763	92%
Luminaire Efficacy	69 LM/W		0 - 60	1854	97%
Maximun Candela	4570 CD		0 - 80	1906	100%

White Flanged Trim (3000K, 98CRI, 35°-Clear, 28W)

Polar Plot

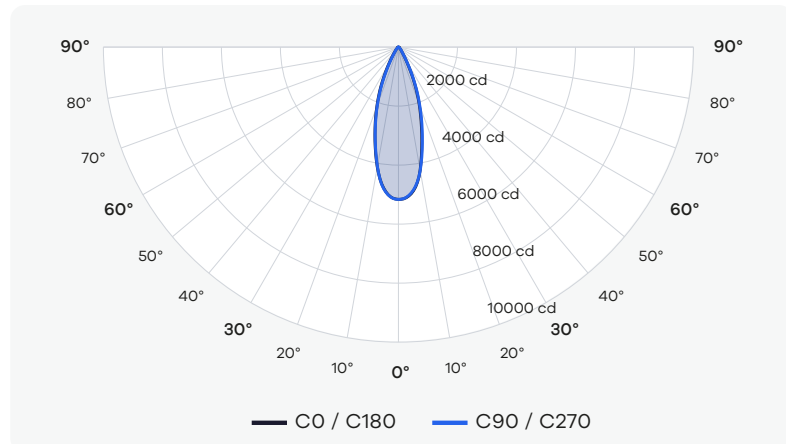

Cone of Light Tabulation

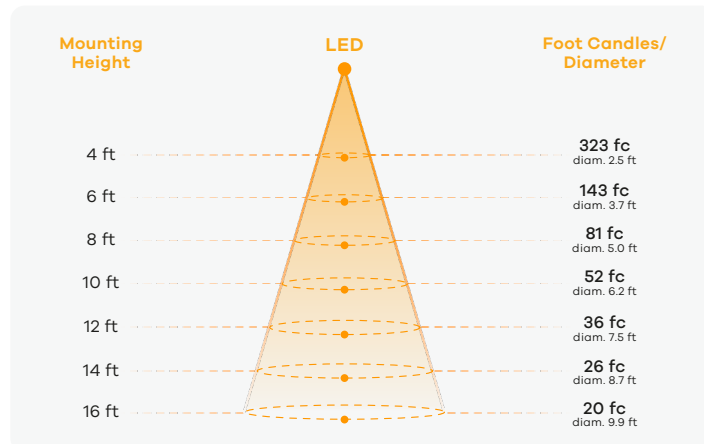

Power Information


Voltage	119.68 V
Current	0.2344 A
Power	27.6 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2190 LM		0 - 40	1992	92%
Luminaire Efficacy	82 LM/W		0 - 60	2095	97%
Maximun Candela	5164 CD		0 - 80	2154	100%

White Flanged Trim (3500K, 98CRI, 35°-Clear, 28W)

Polar Plot

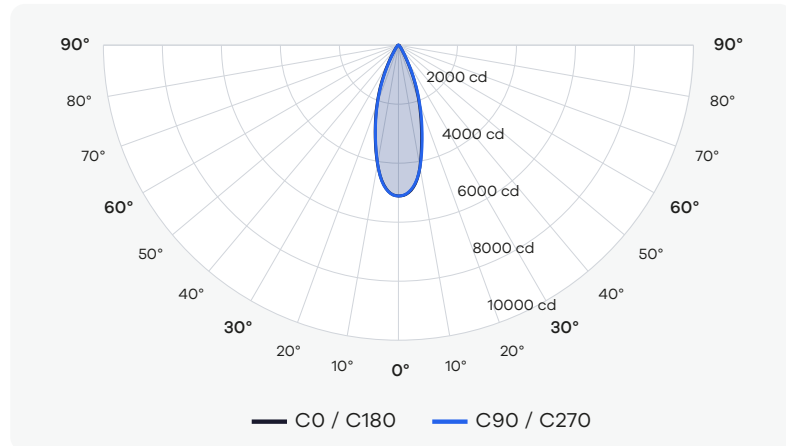

Cone of Light Tabulation

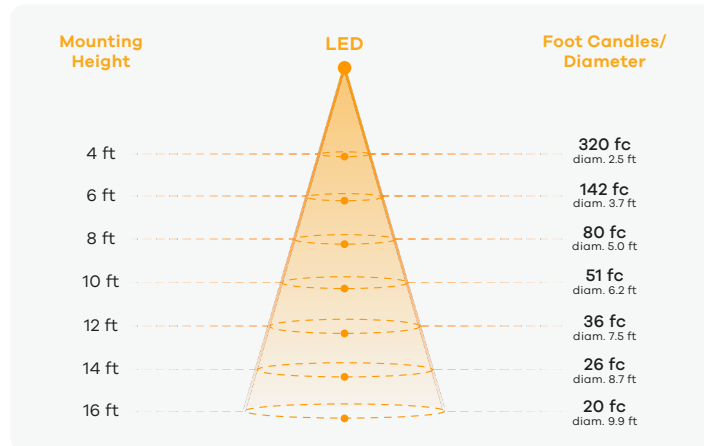

Power Information


Voltage	119.71 V
Current	0.2307 A
Power	27.1 W
Power Factor	0.9818

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2168 LM		0 - 40	1973	92%
Luminaire Efficacy	77 LM/W		0 - 60	2074	97%
Maximum Candela	5113 CD		0 - 80	2133	100%

White Flanged Trim (2700K, 98CRI, 42°-Clear, 28W)

Polar Plot

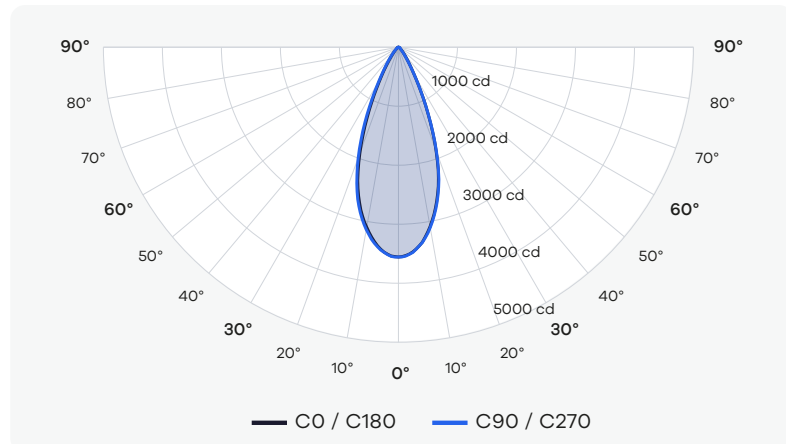

Cone of Light Tabulation

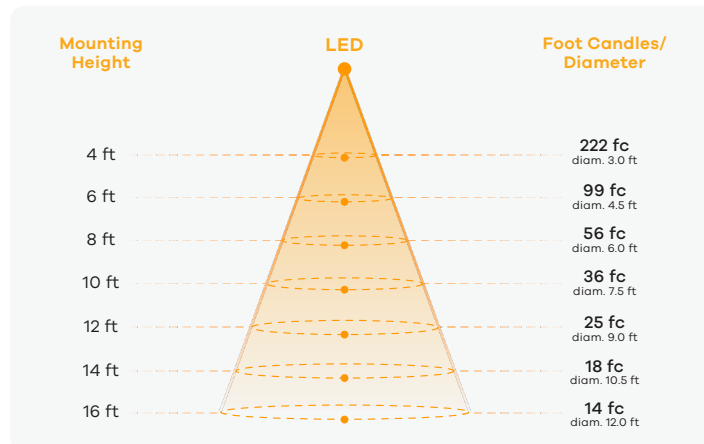

Power Information


Voltage	119.70 V
Current	0.2301 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1890 LM		0 - 40	1697	93%
Luminaire Efficacy	68 LM/W		0 - 60	1793	98%
Maximum Candela	3556 CD		0 - 80	1828	100%

White Flanged Trim (3000K, 98CRI, 42°-Clear, 28W)

Polar Plot

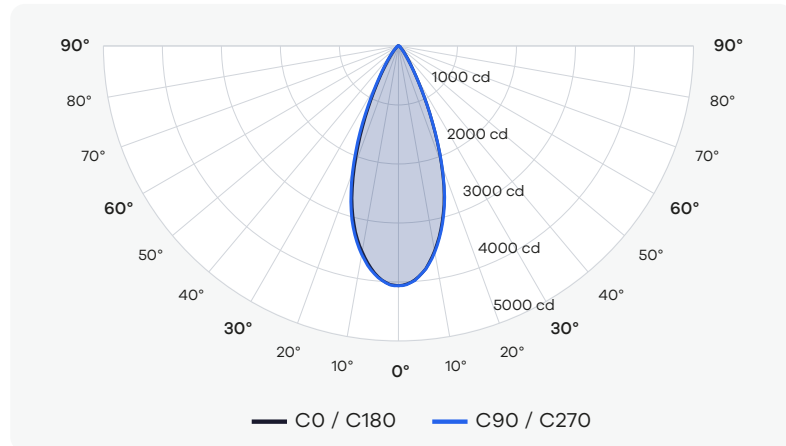

Cone of Light Tabulation

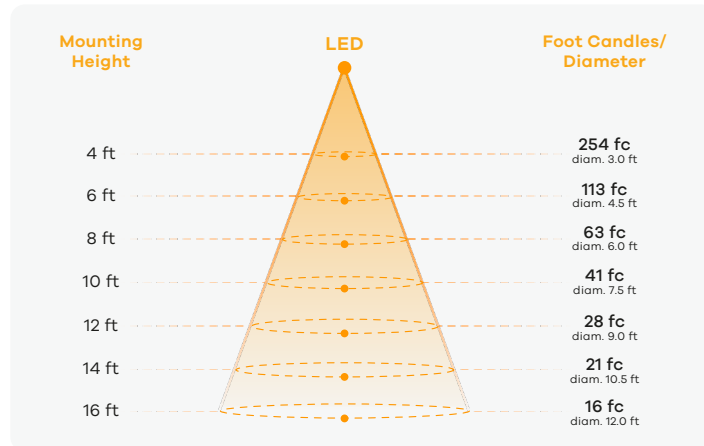

Power Information


Voltage	119.69 V
Current	0.2339 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2160 LM		0 - 40	1939	93%
Luminaire Efficacy	81 LM/W		0 - 60	2049	98%
Maximun Candela	4063 CD		0 - 80	2089	100%

White Flanged Trim (3500K, 98CRI, 42°-Clear, 28W)

Polar Plot

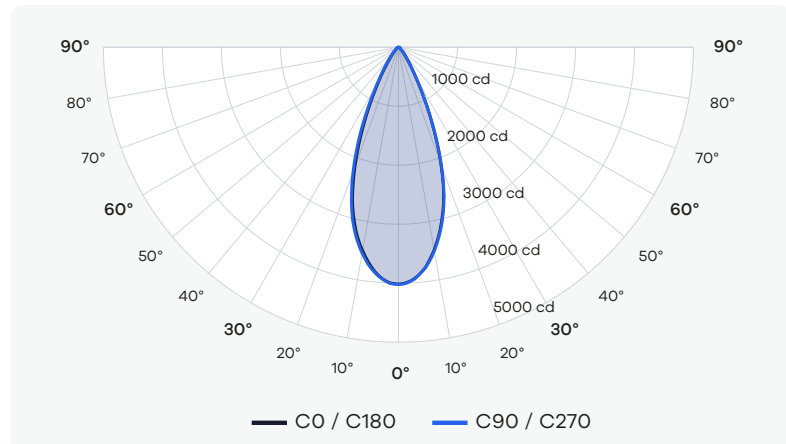

Cone of Light Tabulation

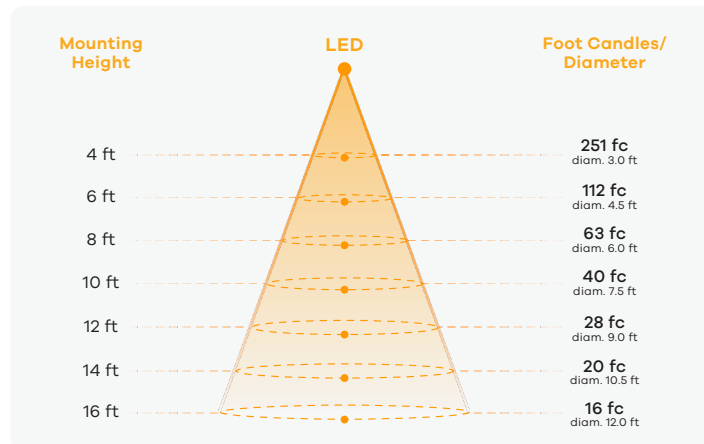

Power Information


Voltage	119.71 V
Current	0.2305 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2135 LM		0 - 40	1917	93%
Luminaire Efficacy	76 LM/W		0 - 60	2025	98%
Maximun Candela	4016 CD		0 - 80	2065	100%

White Flanged Trim (2700K, 98CRI, 52°-Clear, 28W)

Polar Plot

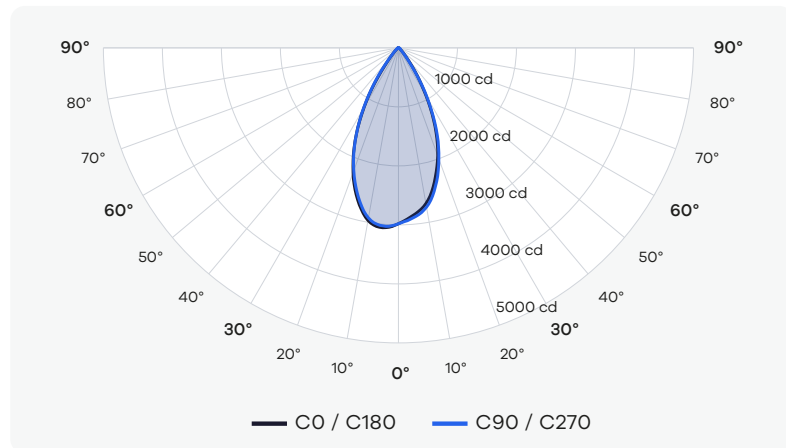

Cone of Light Tabulation

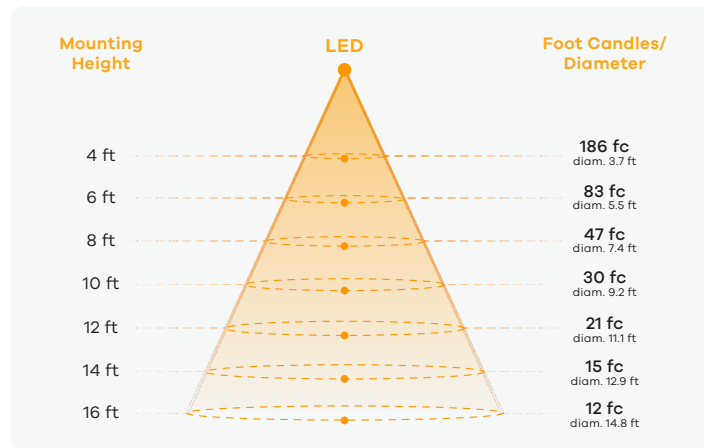

Power Information


Voltage	119.69 V
Current	0.2299 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	2223 LM		0 - 40	1898	93%
Luminaire Efficacy	79 LM/W		0 - 60	2009	98%
Maximum Candela	2980 CD		0 - 80	2037	100%

White Flanged Trim (3000K, 98CRI, 52°-Clear, 28W)

Polar Plot

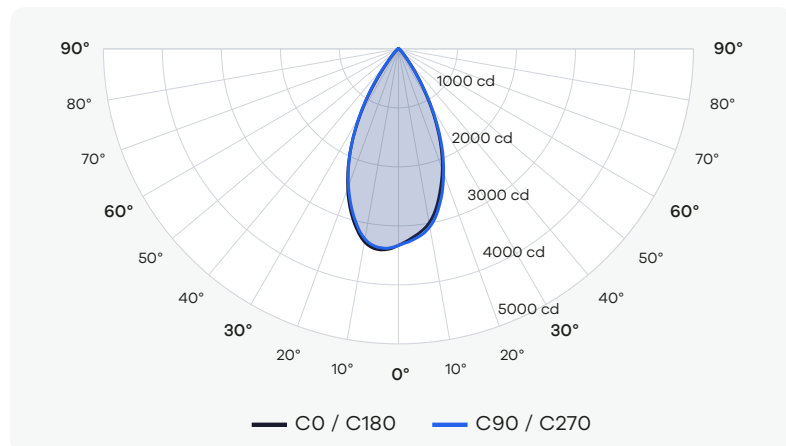

Cone of Light Tabulation

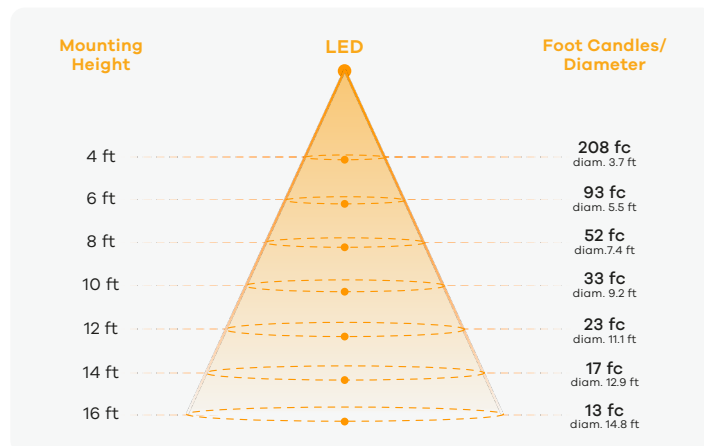

Power Information


Voltage	119.70 V
Current	0.2337 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	2484 LM		0 - 40	2121	93%
Luminaire Efficacy	93 LM/W		0 - 60	2246	98%
Maximum Candela	3331 CD		0 - 80	2277	100%

White Flanged Trim (3500K, 98CRI, 52°-Clear, 28W)

Polar Plot

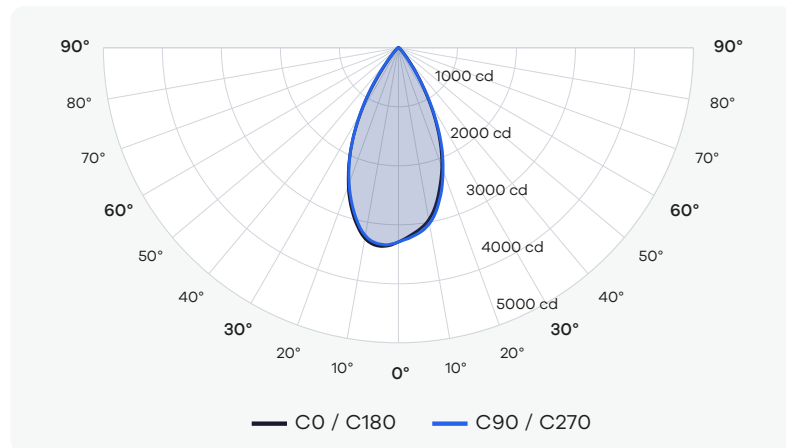

Cone of Light Tabulation

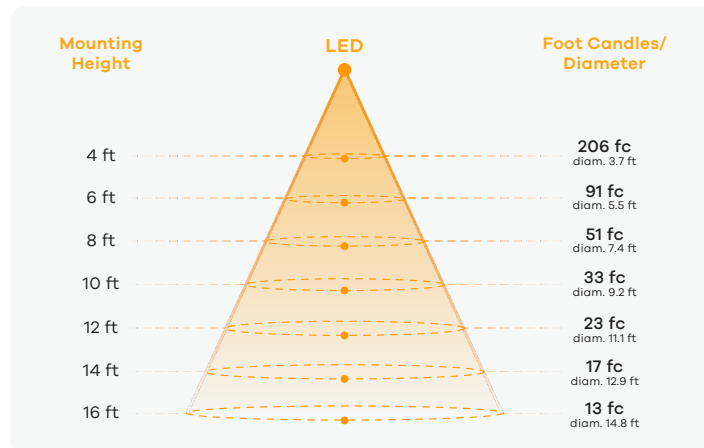

Power Information


Voltage	119.71 V
Current	0.2302 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	2454 LM		0 - 40	2095	93%
Luminaire Efficacy	88 LM/W		0 - 60	2218	98%
Maximun Candela	3291 CD		0 - 80	2249	100%

White Flanged Trim(2700K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

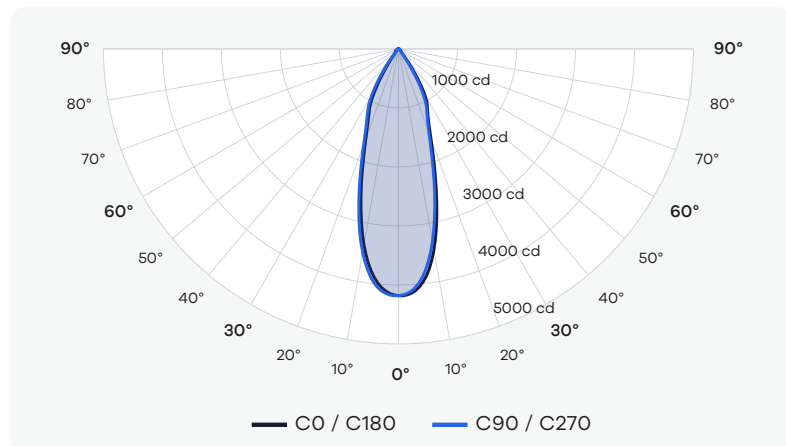

Cone of Light Tabulation

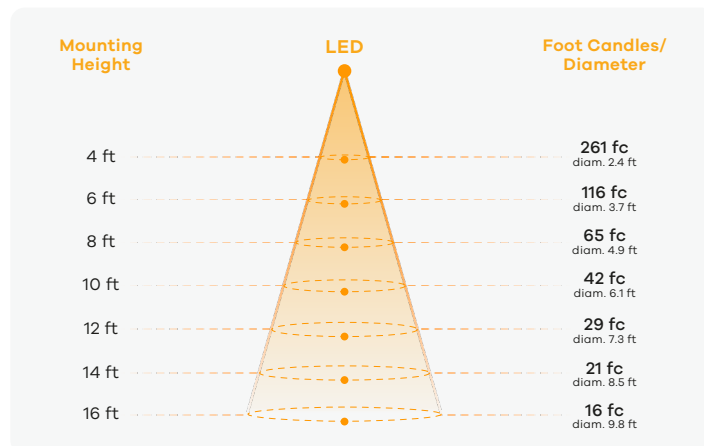

Power Information


Voltage	119.68 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1956 LM		0 - 40	1853	93%
Luminaire Efficacy	70 LM/W		0 - 60	1943	97%
Maximun Candela	4181 CD		0 - 80	1984	99%

White Flanged Trim (3000K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

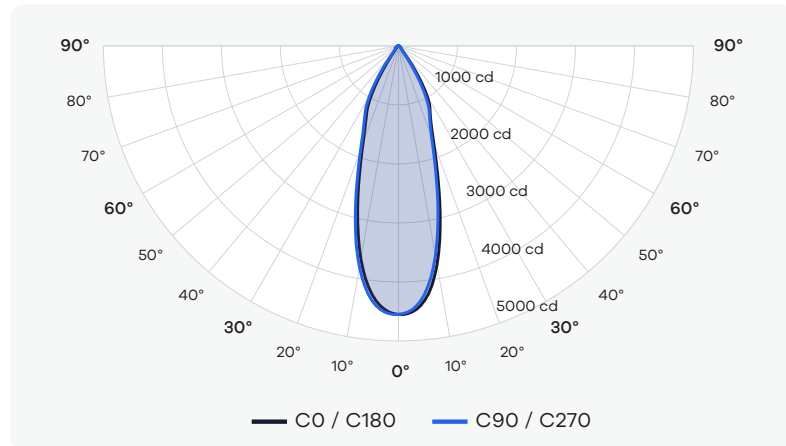

Cone of Light Tabulation

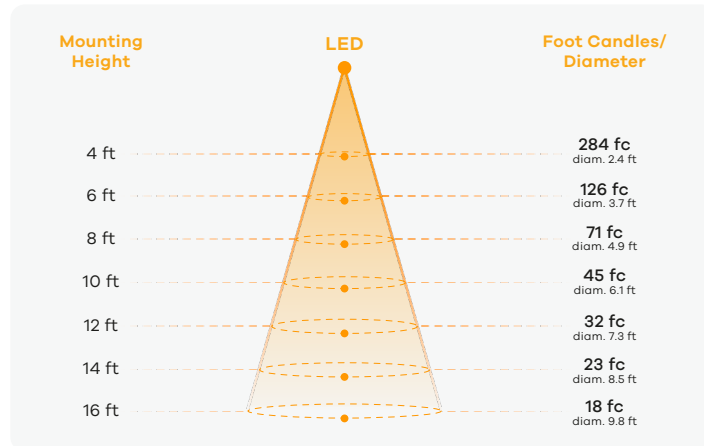

Power Information


Voltage	119.69 V
Current	0.2335 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2128 LM		0 - 40	2016	93%
Luminaire Efficacy	79 LM/W		0 - 60	2114	97%
Maximun Candela	4550 CD		0 - 80	2159	99%

White Flanged Trim (3500K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

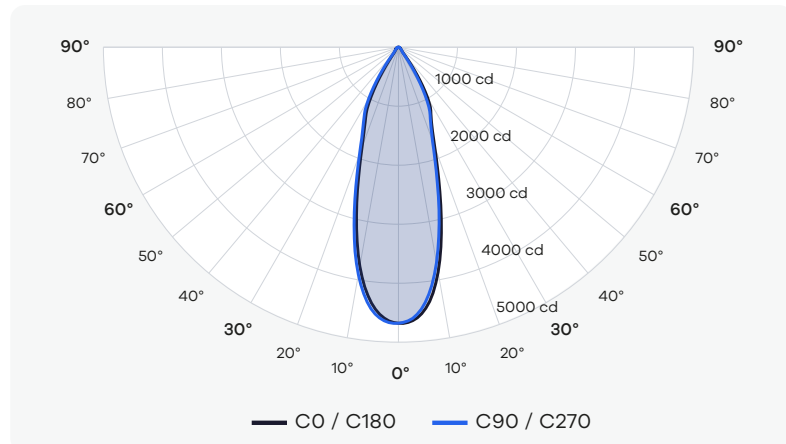

Cone of Light Tabulation

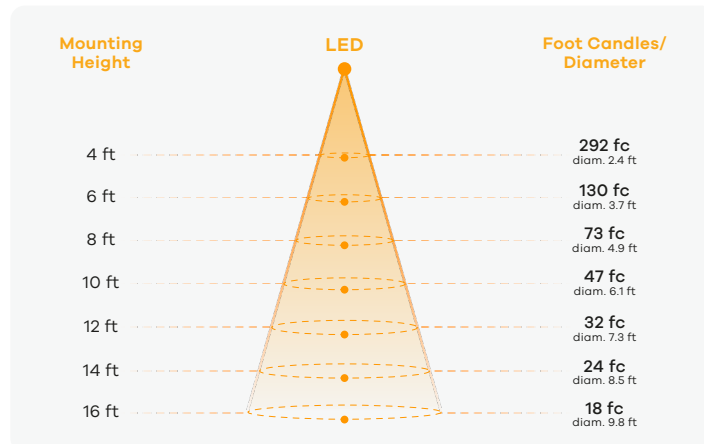

Power Information


Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2188 LM		0 - 40	2073	93%
Luminaire Efficacy	78 LM/W		0 - 60	2174	97%
Maximun Candela	4678 CD		0 - 80	2220	99%

White Flanged Trim (2700K, 98CRI, 53°-Silver Reflector, 28W)

Polar Plot

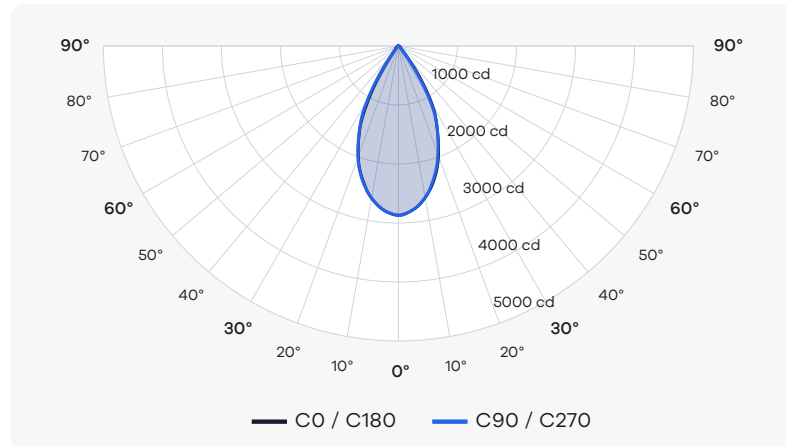

Cone of Light Tabulation

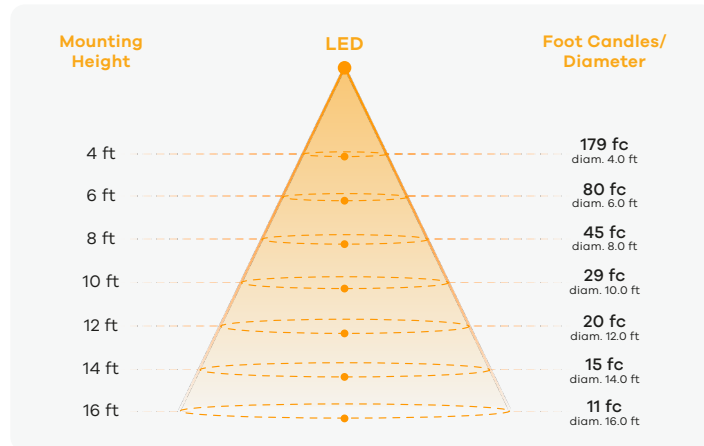

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.5	90 - 270: 0.5	Zone	Lumens	% of Luminaire
Total Lumen Output	2046 LM		0 - 40	1978	94%
Luminaire Efficacy	76 LM/W		0 - 60	2063	98%
Maximum Candela	2870 CD		0 - 80	2101	99%

White Flanged Trim (3000K, 98CRI, 53°-Silver Reflector, 28W)

Polar Plot

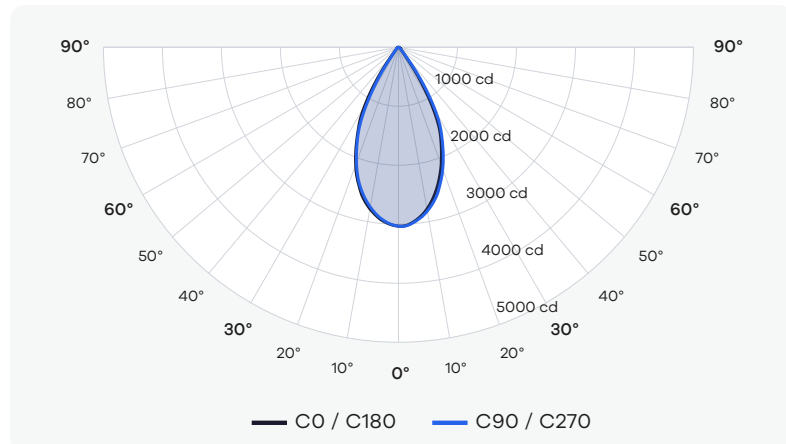

Cone of Light Tabulation

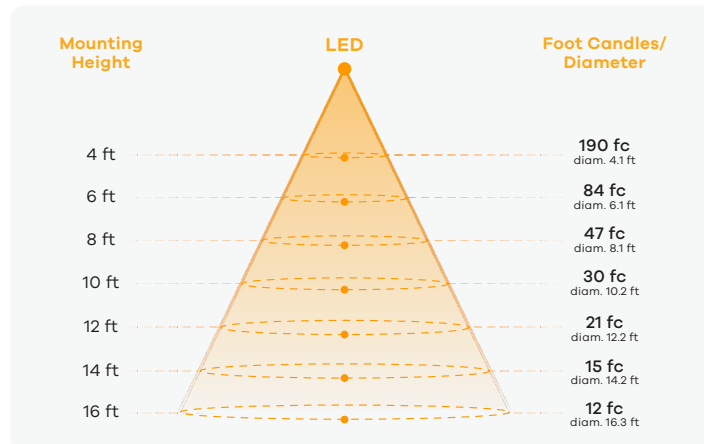

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	2199 LM		0 - 40	2047	93%
Luminaire Efficacy	83 LM/W		0 - 60	2147	97%
Maximum Candela	3033 CD		0 - 80	2187	99%

White Flanged Trim (3500K, 98CRI, 53°-Silver Reflector, 28W)

Polar Plot

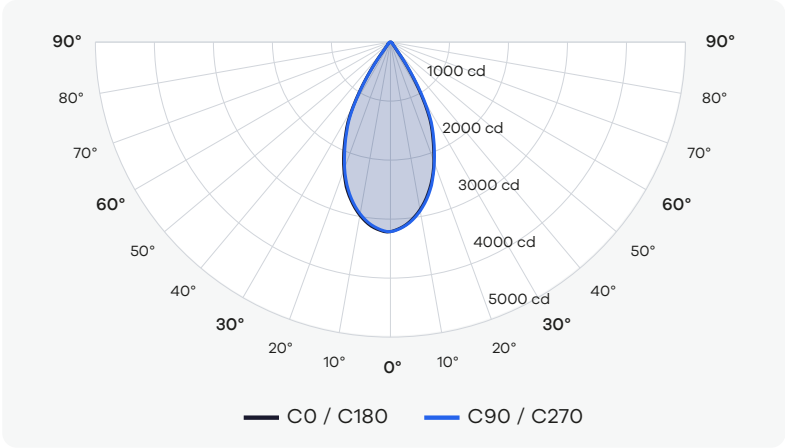

Cone of Light Tabulation

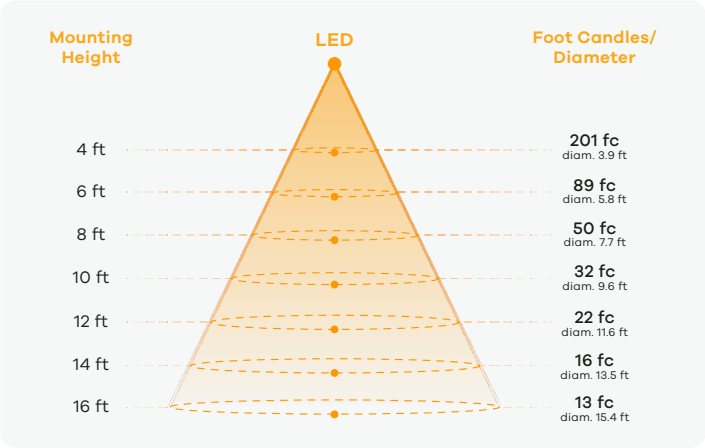

Power Information

Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2299 LM		0 - 40	2043	94%
Luminaire Efficacy	87 LM/W		0 - 60	2128	98%
Maximun Candela	3213 CD		0 - 80	2168	99%