Goodlite

Space

5" SQUARE RETROFIT

INSTALLATION INSTRUCTIONS

Warning:
These products may represent a possible shock or fire hazard if improperly installed or attached in any way.

Caution. To reduce risk of fire, electric shock or injury to persons:

1. Make sure that the electrical power to the fixture is disconnected prior to any installation or retrofit.
2. This light is suitable for damp or wet locations.
3. Use with recessed cans (recessed housing) only. Do not attempt to alter for other sizes or purposes.
4. For best dimming results, use standard dimmers in a branch circuit that is supplied with 120V AC power.
5. Check dimmer manufacturer's specifications to confirm whether minimum loads apply.

Warning. Risk of fire or electric shock:

1. Install these kits only in luminaires that have the construction features and dimensions shown in the illustrations herein. Confirm this before installation by checking the interior of the housing for a manufacturer's part number and specifications; or measure the diameter of the housing. The recessed housing must have a minimum measured inside diameter (opening) as shown.

5" kit :
housing i.d. 5-1/4"

Do not make or alter any open holes in a wiring enclosure nor in any electrical components during kit installation!

2. Kit installation requires knowledge of recessed lighting luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.


Do not use these products in luminaires located where elevated ambient temperatures.

3. **The electrical rating of this product is 120V Ac. The installer must determine whether power supply is 120V AC at the luminaire before installation.** (120V/277V Ac 50~60Hz is available if 120V/277V is indicated on caution label).

4. Luminaire's wiring, ballast(s), or other electrical parts may be damaged when drilling for installation of reflector kit hardware. If drilling is required in any installation, check for enclosed wiring and components and be careful to protect them from any harm. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.


Installation

1.

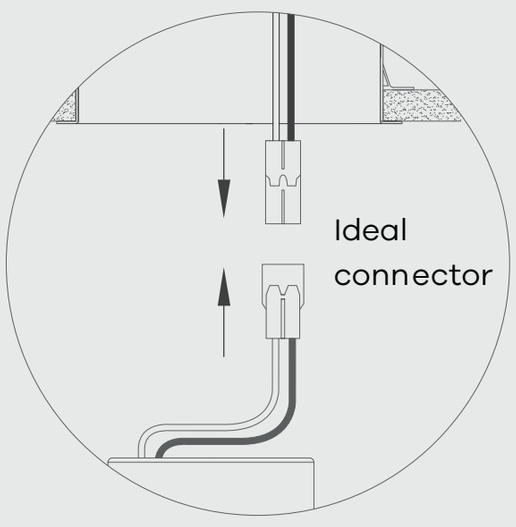


Step 1:
Connect the Ideal connectors. (Fig 1)

2.

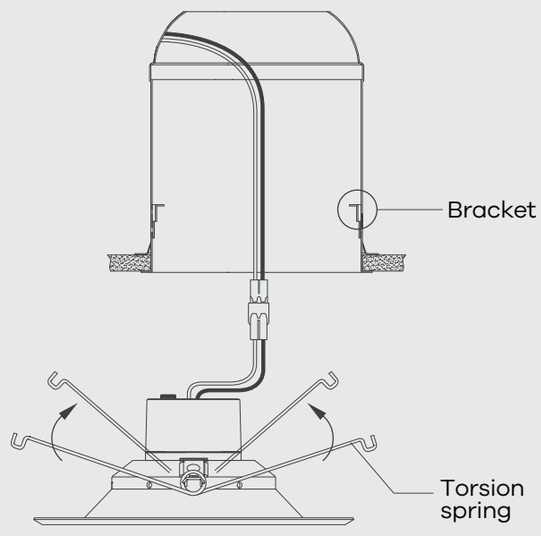

Step 2:
Put the torsion springs into the brackets and push the fixture inside of the housing. (Fig. 2)

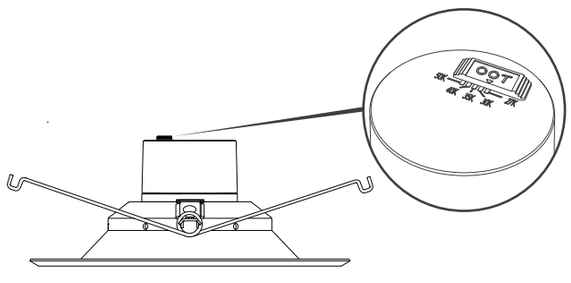

5 CCT Control Switch

Use the switch to set the desired Correlated Color Temperature (CCT).

Dimmer list

Dimming Rate
10-100%

Brand	Model
COOPER	DLC03P
LEVITON	1A1505 / 1C1605
	6631 / 6633
LUTRON	CT-603PG / CT-600PR
	DV-600PR / DV603PG
	DVW-603PGH / DVCL-153P
	MACL-153M / TGCL-153P
	S-600PR / S-2-LH

Made In China
Goodlite Products. Tinton Falls NJ 07753.