



White Trim (2700K, 98CRI, 35°-Clear, 12W)

Polar Plot

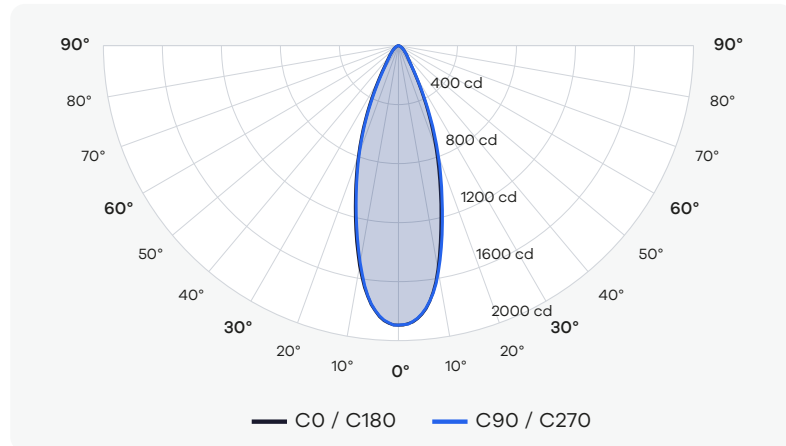

Cone of Light Tabulation

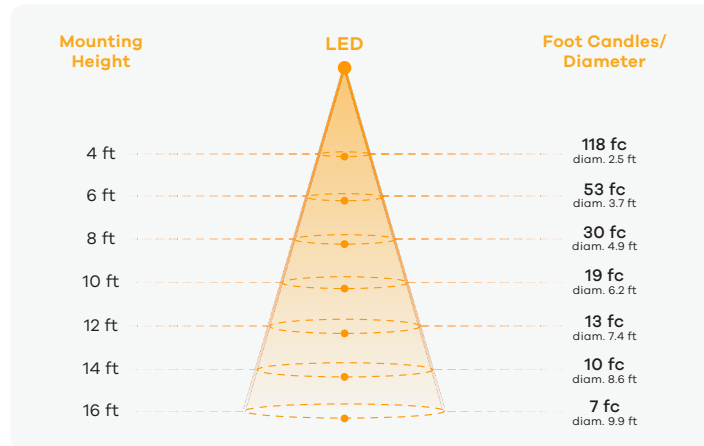

Power Information


Voltage	119.84 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	880 LM		0 - 40	763	88%
Luminaire Efficacy	73 LM/W		0 - 60	846	98%
Maximun Candela	1895 CD		0 - 80	866	100%

White Trim (3000K, 98CRI, 35°-Clear, 12W)

Polar Plot

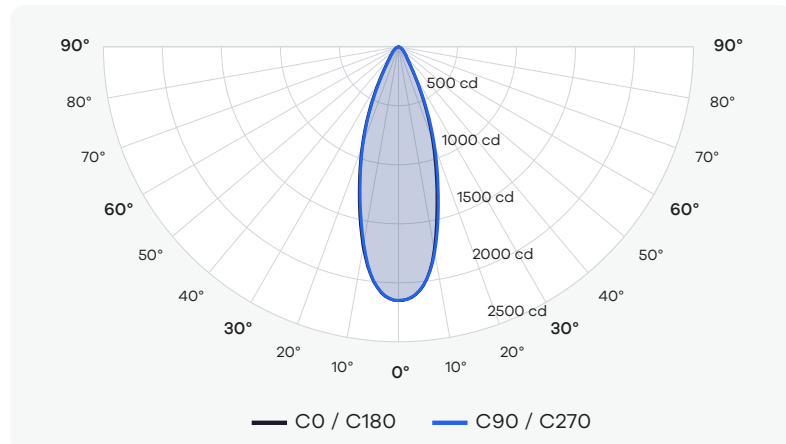

Cone of Light Tabulation

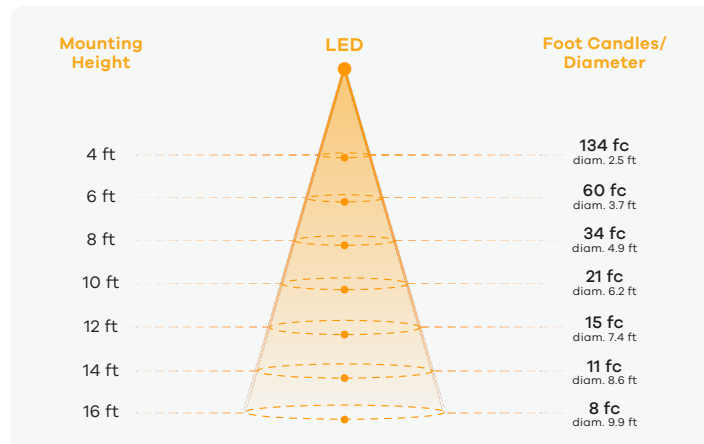

Power Information


Voltage	119.82 V
Current	0.08972 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	999 LM		0 - 40	866	88%
Luminaire Efficacy	97 LM/W		0 - 60	960	98%
Maximun Candela	2150 CD		0 - 80	982	100%

White Trim (3500K, 98CRI, 35°-Clear, 12W)

Polar Plot

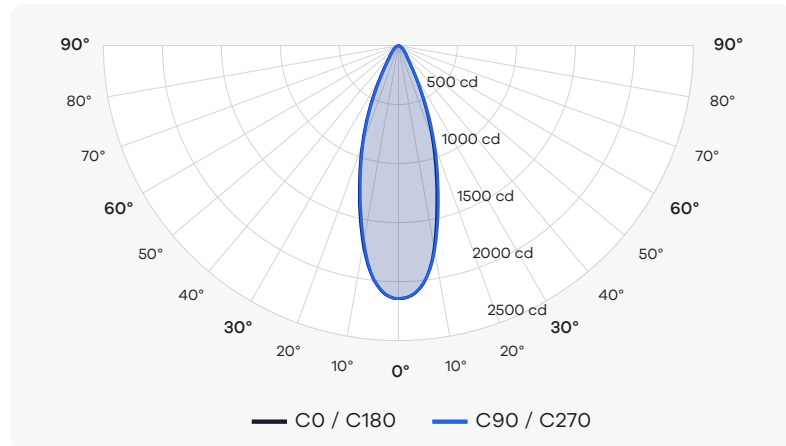

Cone of Light Tabulation

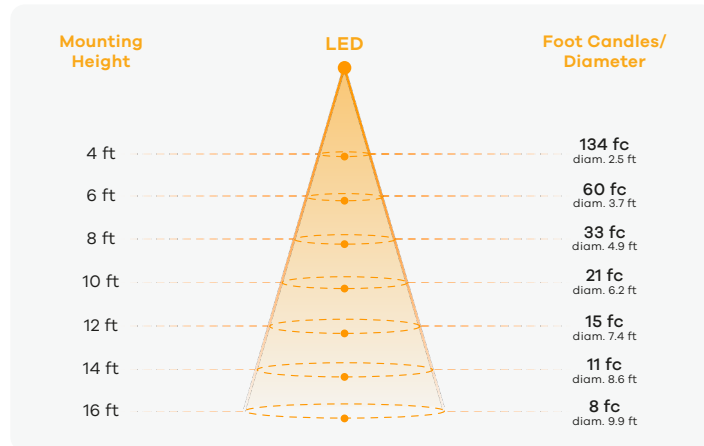

Power Information


Voltage	119.83 V
Current	0.08936 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	996 LM		0 - 40	863	88%
Luminaire Efficacy	83 LM/W		0 - 60	957	98%
Maximun Candela	2144 CD		0 - 80	979	100%

White Trim (2700K, 98CRI, 42°-Clear, 12W)

Polar Plot

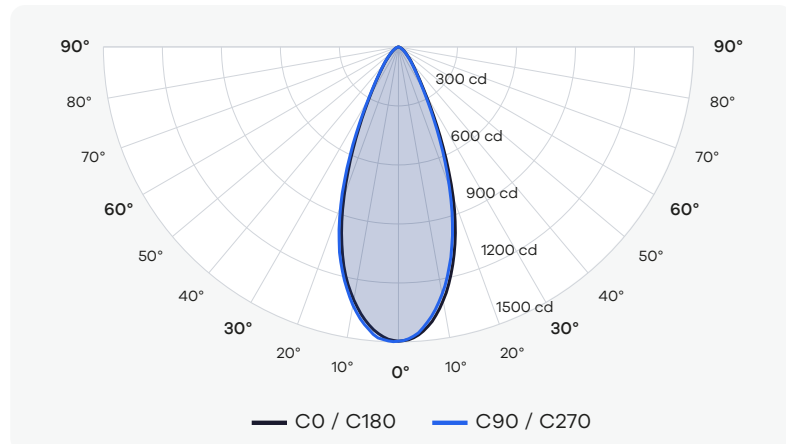

Cone of Light Tabulation

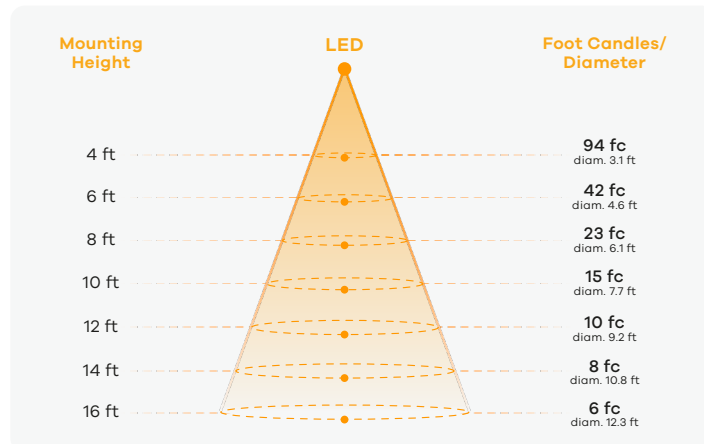

Power Information


Voltage	119.72 V
Current	0.08974 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	880 LM		0 - 40	769	88%
Luminaire Efficacy	73 LM/W		0 - 60	857	98%
Maximun Candela	1496 CD		0 - 80	877	100%

White Trim (3000K, 98CRI, 42°-Clear, 12W)

Polar Plot

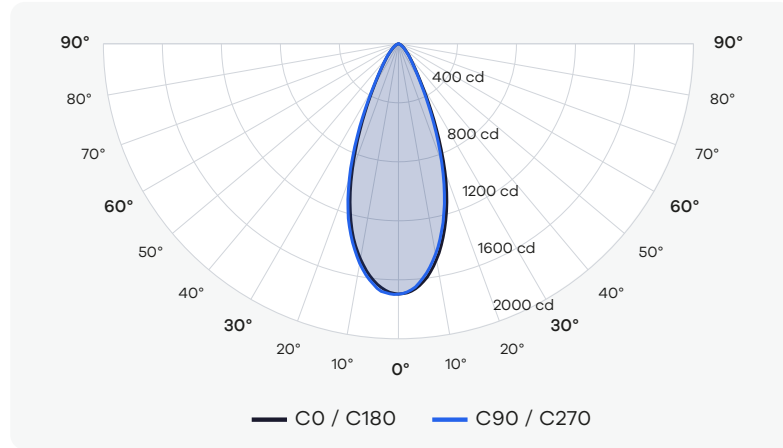

Cone of Light Tabulation

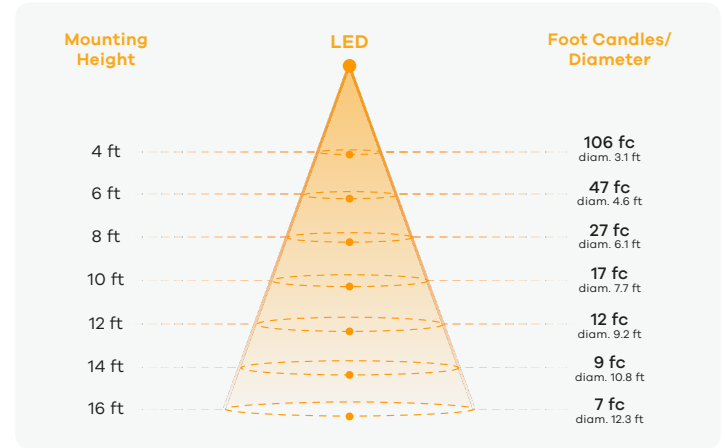

Power Information


Voltage	119.82 V
Current	0.08961 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	998 LM		0 - 40	872	88%
Luminaire Efficacy	97 LM/W		0 - 60	971	98%
Maximun Candela	1697 CD		0 - 80	994	100%

White Trim (3500K, 98CRI, 42°-Clear, 12W)

Polar Plot

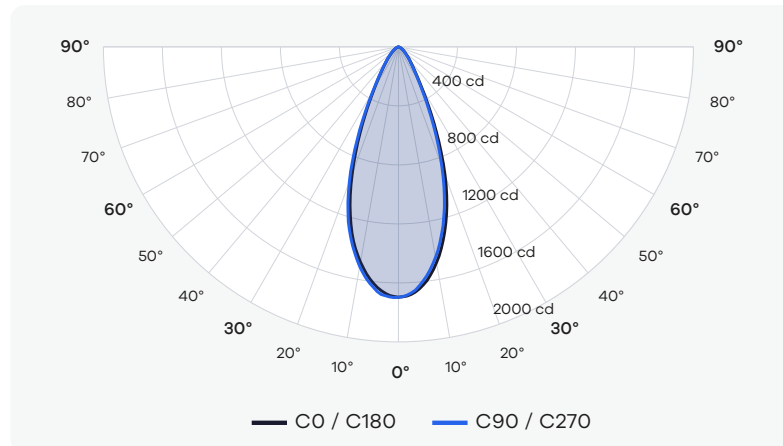

Cone of Light Tabulation

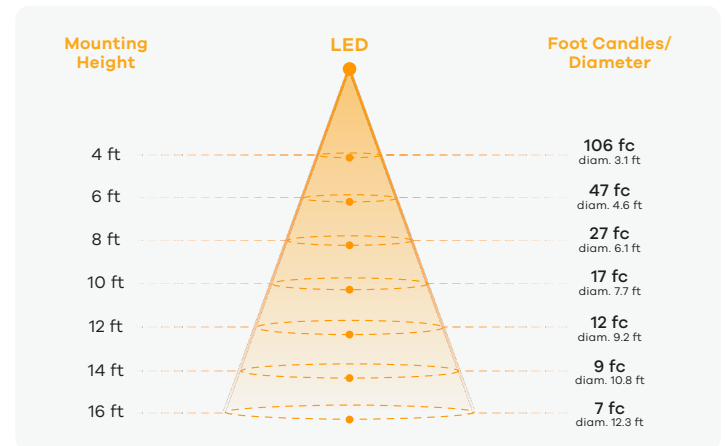

Power Information


Voltage	119.83 V
Current	0.08927 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	998 LM		0 - 40	872	88%
Luminaire Efficacy	83 LM/W		0 - 60	971	98%
Maximun Candela	1697 CD		0 - 80	994	100%

White Trim (2700K, 98CRI, 53°-Clear, 12W)

Polar Plot

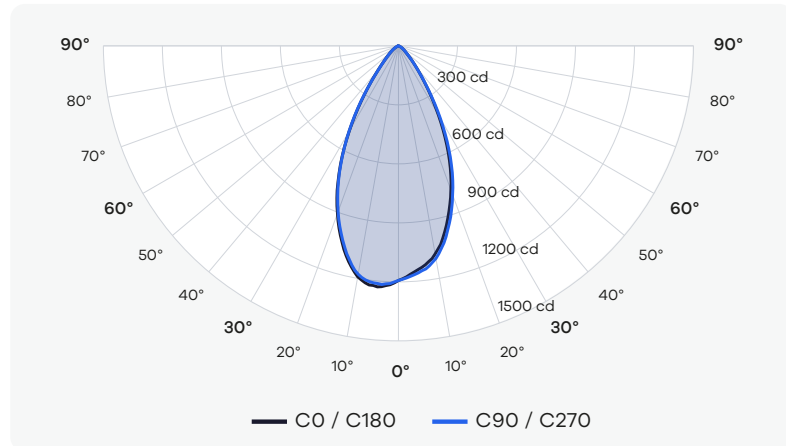

Cone of Light Tabulation

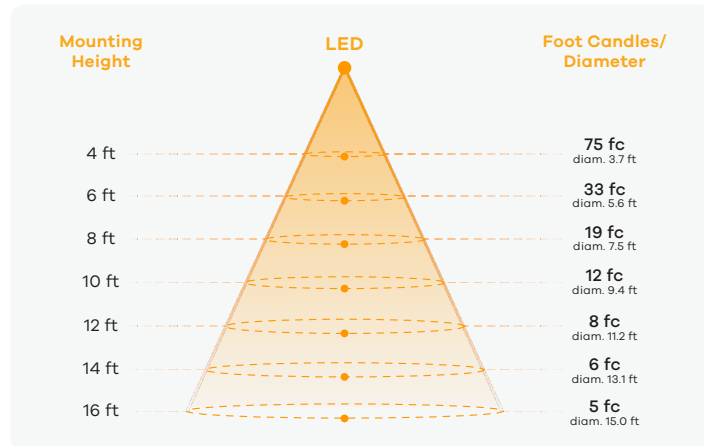

Power Information


Voltage	119.74 V
Current	0.08963 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	977 LM		0 - 40	795	88%
Luminaire Efficacy	81 LM/W		0 - 60	885	98%
Maximun Candela	1193 CD		0 - 80	899	100%

White Trim (3000K, 98CRI, 53°-Clear, 12W)

Polar Plot

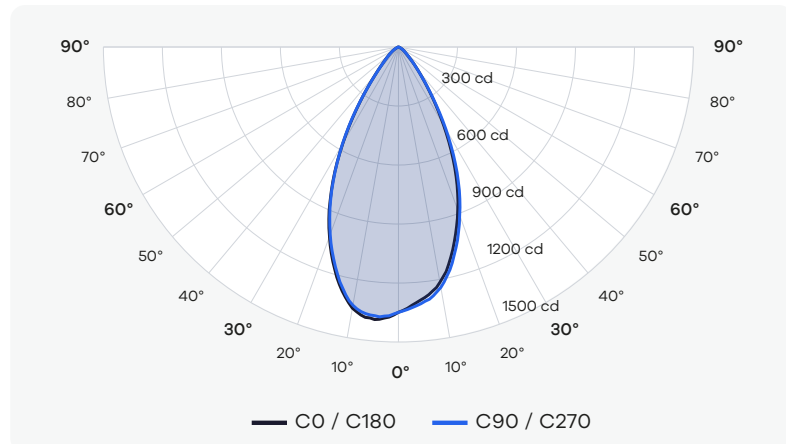

Cone of Light Tabulation

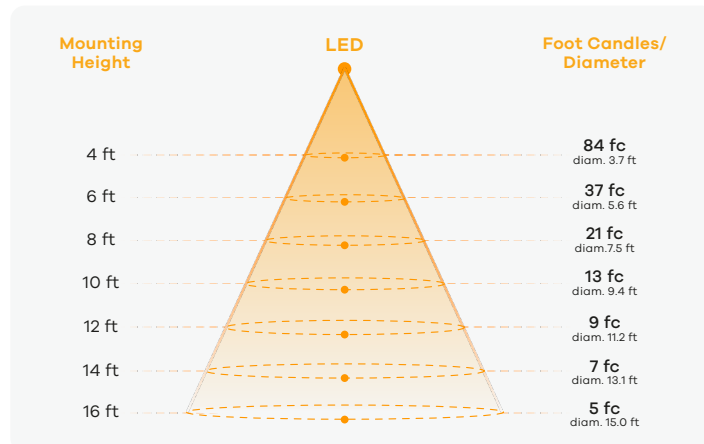

Power Information


Voltage	119.83 V
Current	0.08950 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1107 LM		0 - 40	899	88%
Luminaire Efficacy	108 LM/W		0 - 60	1000	98%
Maximun Candela	1349 CD		0 - 80	1017	100%

White Trim (3500K, 98CRI, 53°-Clear, 12W)

Polar Plot

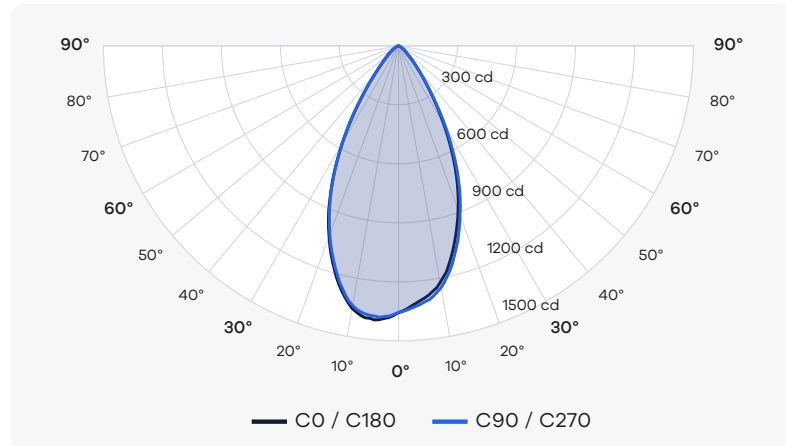

Cone of Light Tabulation

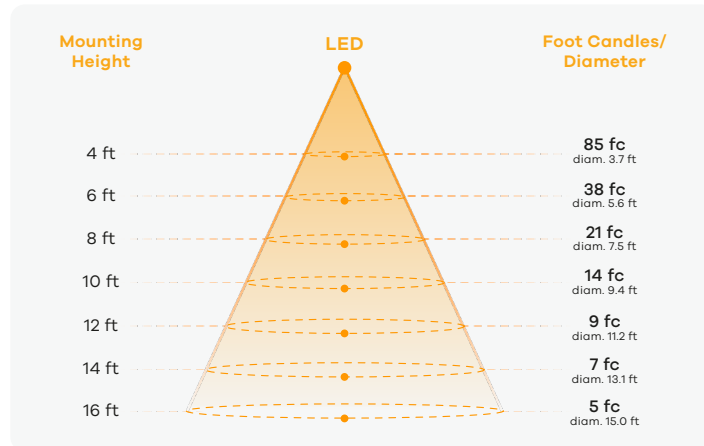

Power Information


Voltage	119.83 V
Current	0.08934 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1111 LM		0 - 40	905	88%
Luminaire Efficacy	93 LM/W		0 - 60	1006	98%
Maximum Candela	1357 CD		0 - 80	1023	100%

White Trim (2700K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

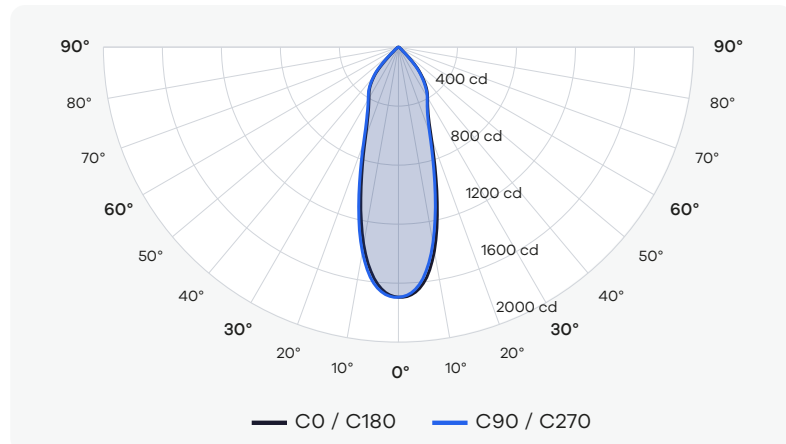

Cone of Light Tabulation

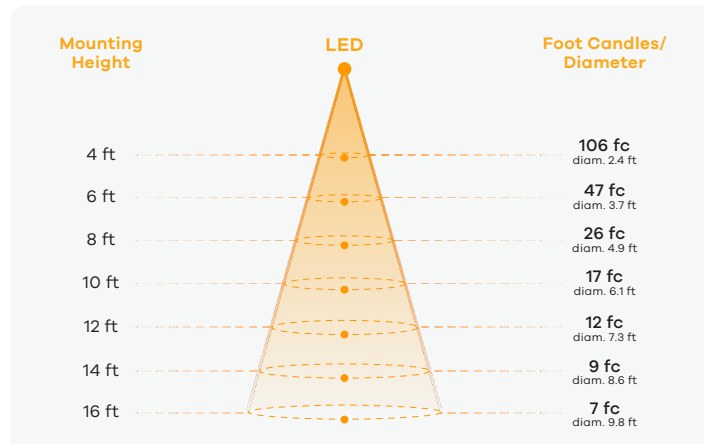

Power Information


Voltage	119.74 V
Current	0.08953 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	977 LM		0 - 40	847	88%
Luminaire Efficacy	81 LM/W		0 - 60	951	98%
Maximum Candela	1695 CD		0 - 80	965	100%

White Trim (3000K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

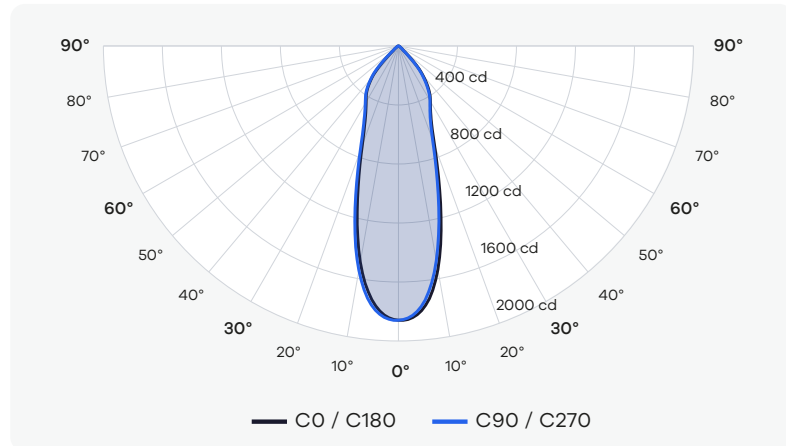

Cone of Light Tabulation

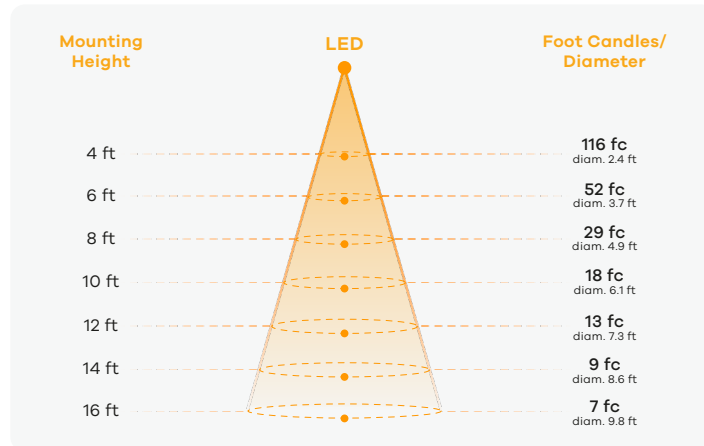

Power Information


Voltage	119.83 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9779

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1071 LM		0 - 40	929	88%
Luminaire Efficacy	104 LM/W		0 - 60	1043	98%
Maximun Candela	1859 CD		0 - 80	1059	100%

White Trim (3500K, 98CRI, 34°-Silver Reflector, 12W)

Polar Plot

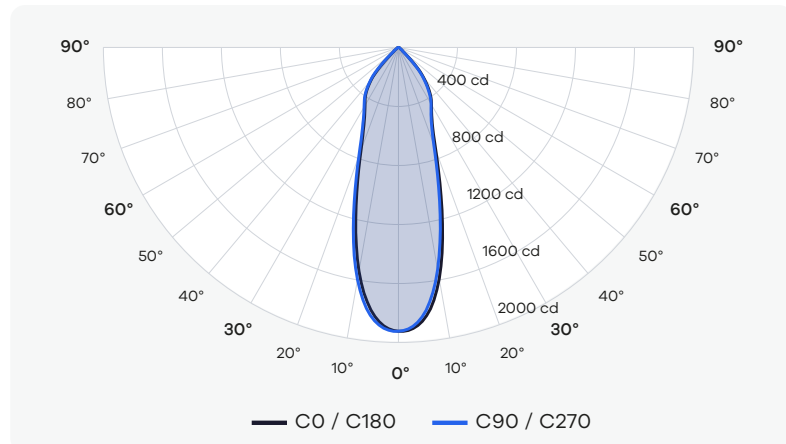

Cone of Light Tabulation

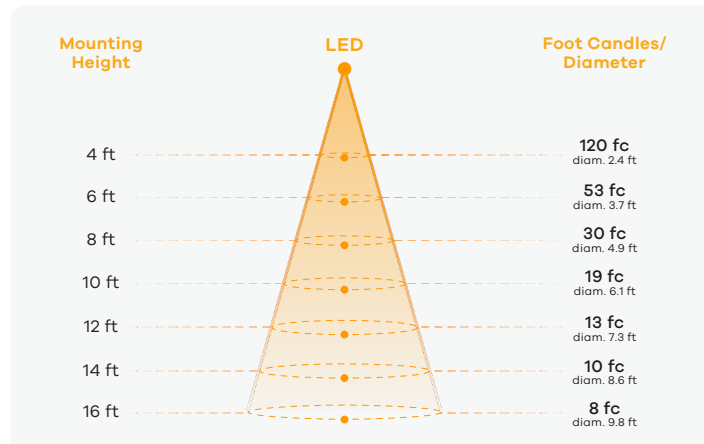

Power Information


Voltage	119.82 V
Current	0.08925 A
Power	10.5 W
Power Factor	0.9778

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1108 LM		0 - 40	961	88%
Luminaire Efficacy	92 LM/W		0 - 60	1079	98%
Maximun Candela	1924 CD		0 - 80	1095	100%

White Trim (2700K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

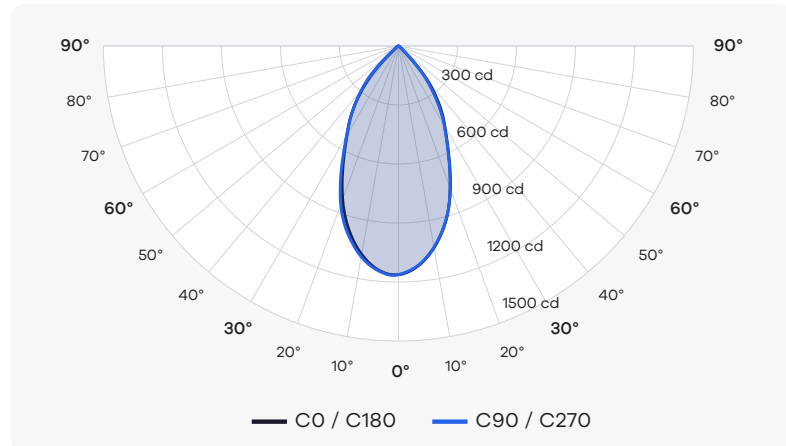

Cone of Light Tabulation

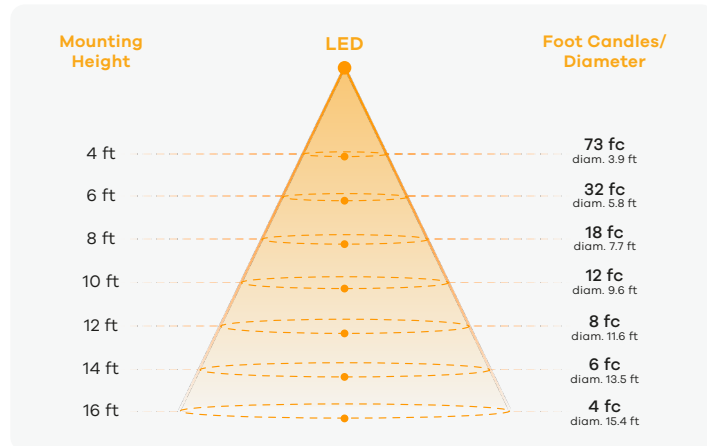

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1017 LM		0 - 40	860	90%
Luminaire Efficacy	100 LM/W		0 - 60	944	99%
Maximun Candela	1162 CD		0 - 80	954	100%

White Trim (3000K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

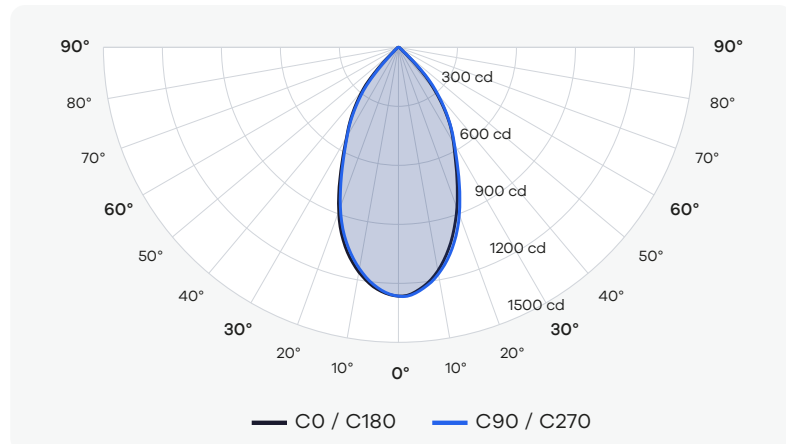

Cone of Light Tabulation

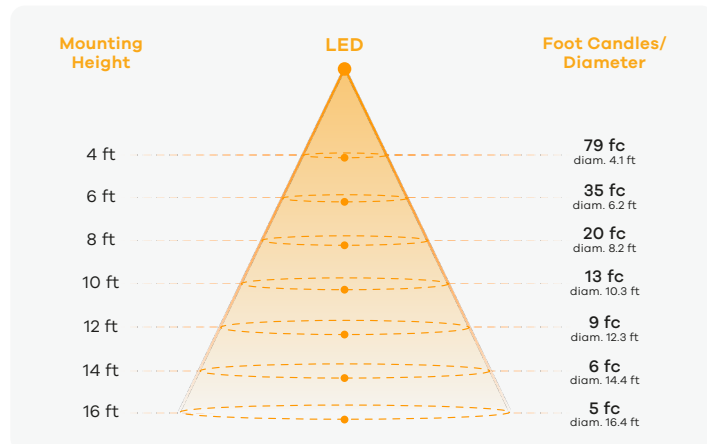

Power Information


Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	1110 LM		0 - 40	990	88%
Luminaire Efficacy	108 LM/W		0 - 60	1113	99%
Maximun Candela	1265 CD		0 - 80	1126	100%

White Trim (3500K, 98CRI, 54°-Silver Reflector, 12W)

Polar Plot

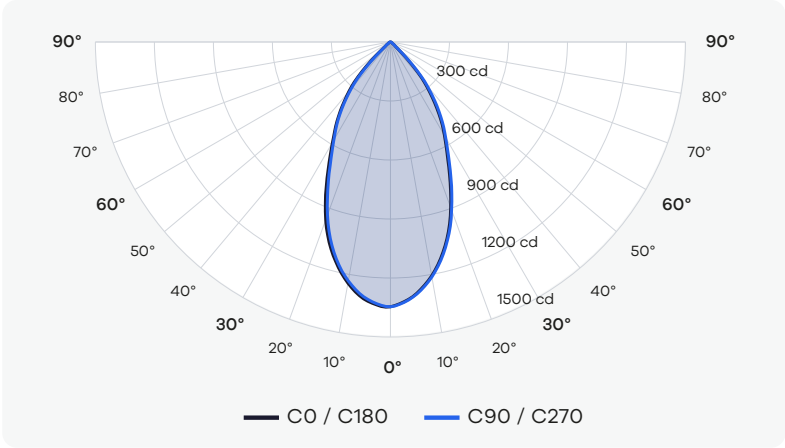

Cone of Light Tabulation

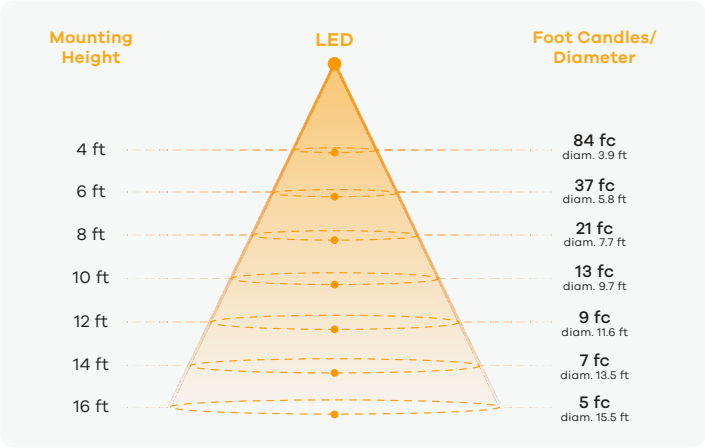

Power Information

Voltage	119.74 V
Current	0.08949 A
Power	10.5 W
Power Factor	0.9776

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1170 LM		0 - 40	996	90%
Luminaire Efficacy	114 LM/W		0 - 60	1100	99%
Maximun Candela	1346 CD		0 - 80	1111	100%