



White Trim (2700K, 98CRI, 35°-Clear, 15W)

Polar Plot

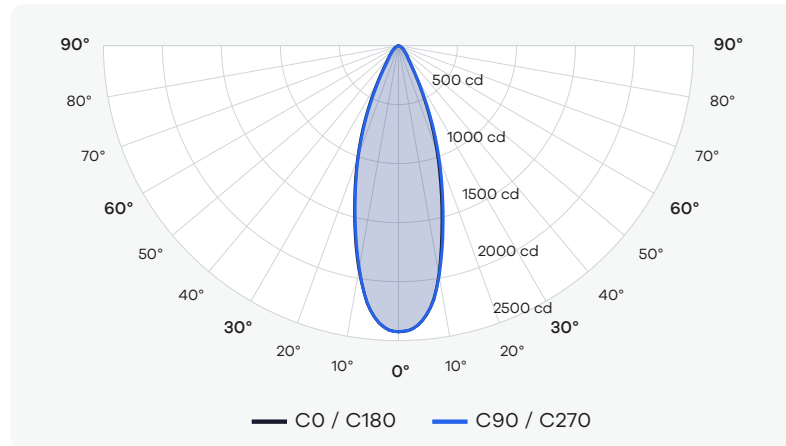

Cone of Light Tabulation

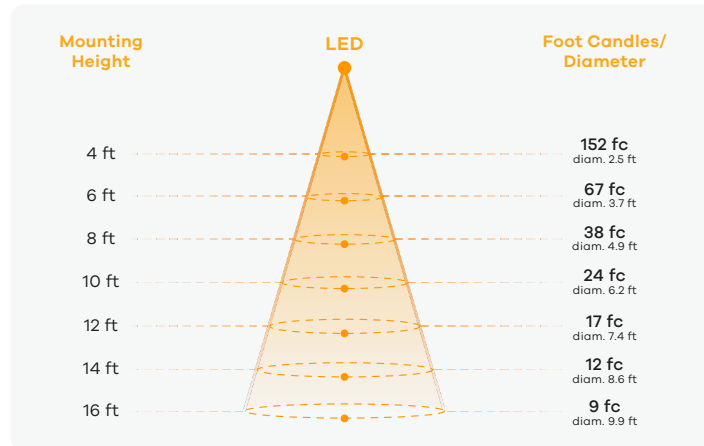

Power Information


Voltage	119.73 V
Current	0.1164 A
Power	13.6 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1121 LM		0 - 40	975	88%
Luminaire Efficacy	75 LM/W		0 - 60	1081	98%
Maximun Candela	2425 CD		0 - 80	1106	100%

White Trim (3000K, 98CRI, 35°-Clear, 15W)

Polar Plot

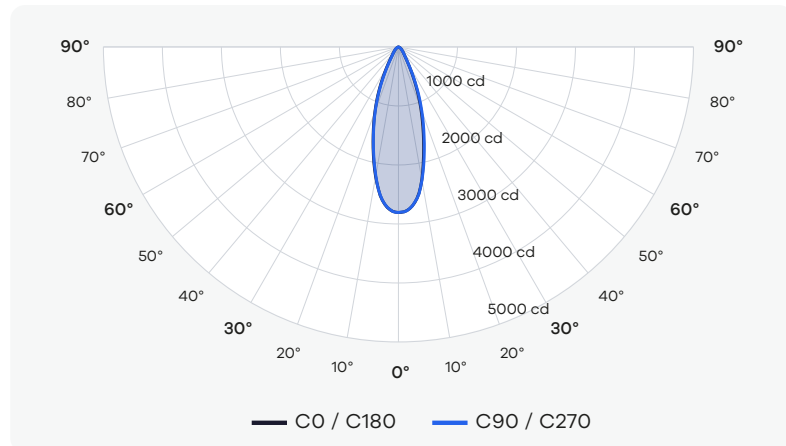

Cone of Light Tabulation

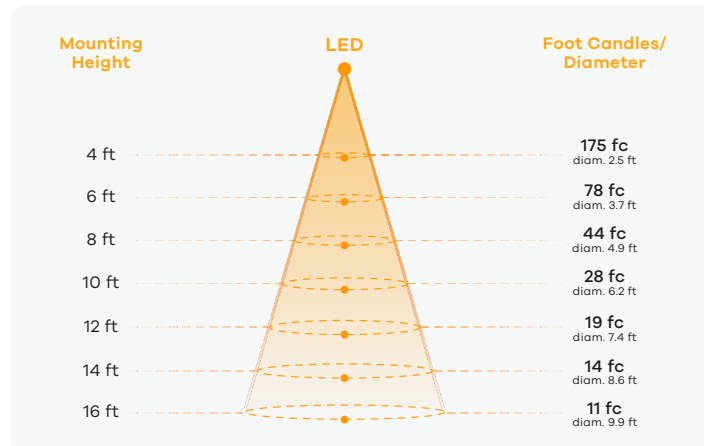

Power Information


Voltage	119.78 V
Current	0.1175 A
Power	13.8 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1297 LM		0 - 40	1128	88%
Luminaire Efficacy	97 LM/W		0 - 60	1250	98%
Maximun Candela	2806 CD		0 - 80	1280	100%

White Trim (3500K, 98CRI, 35°-Clear, 15W)

Polar Plot

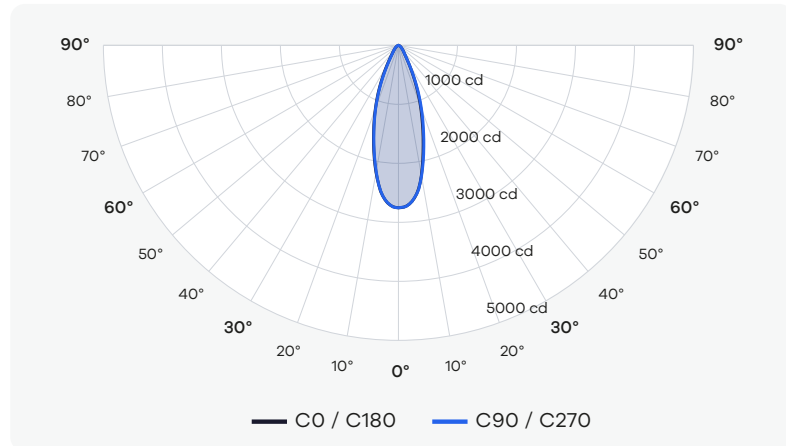

Cone of Light Tabulation

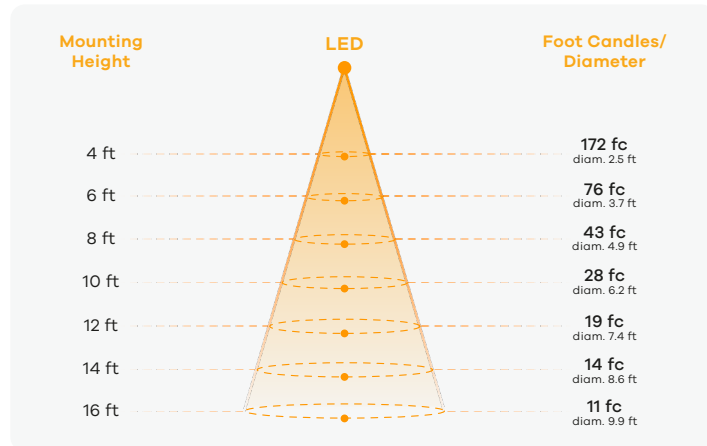

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1273 LM		0 - 40	1107	88%
Luminaire Efficacy	85 LM/W		0 - 60	1227	98%
Maximum Candela	2753 CD		0 - 80	1256	100%

White Trim (2700K, 98CRI, 42°-Clear, 15W)

Polar Plot

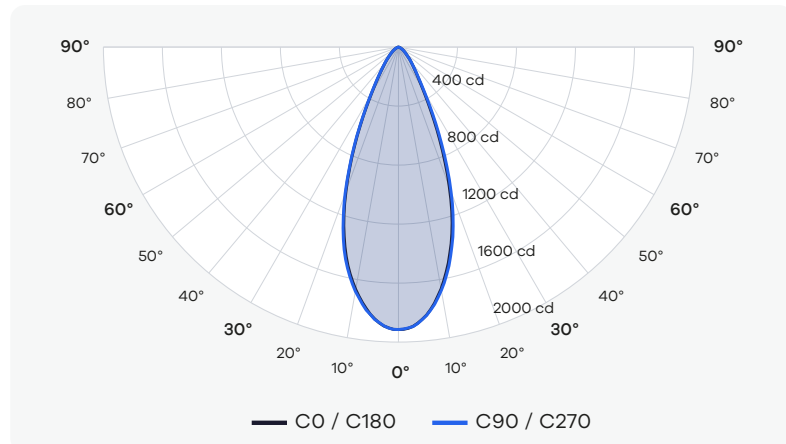

Cone of Light Tabulation

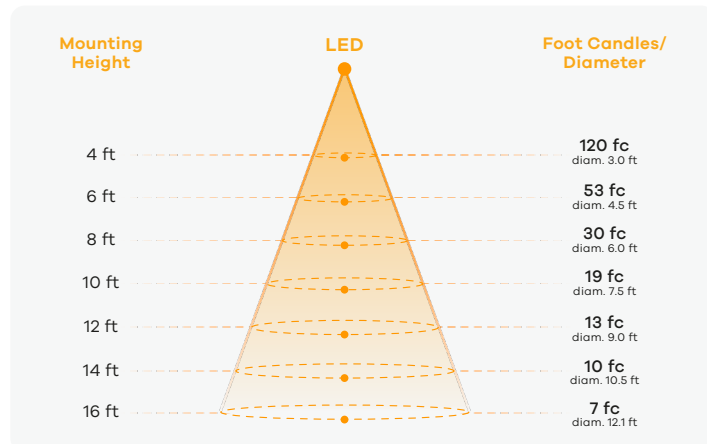

Power Information


Voltage	119.71 V
Current	0.1166 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1127 LM		0 - 40	963	88%
Luminaire Efficacy	75 LM/W		0 - 60	1075	98%
Maximum Candela	1915 CD		0 - 80	1098	100%

White Trim (3000K, 98CRI, 42°-Clear, 15W)

Polar Plot

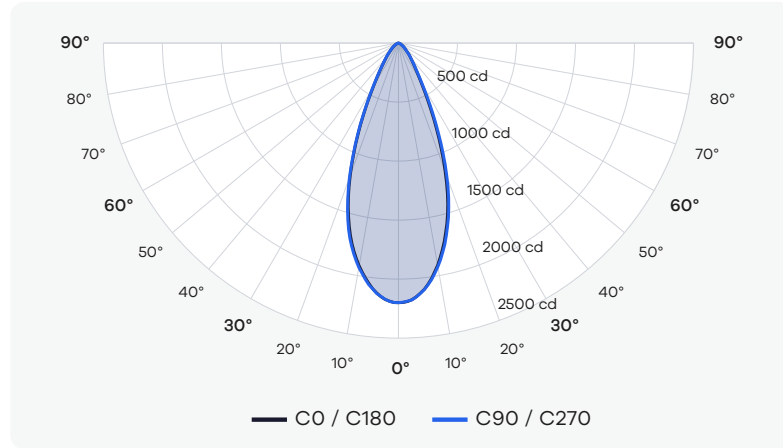

Cone of Light Tabulation

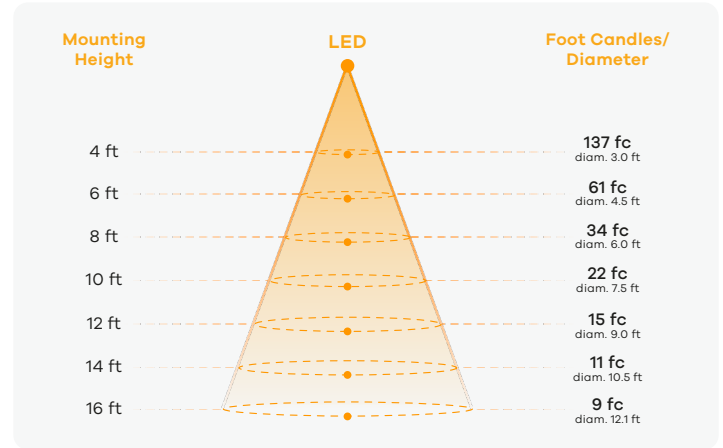

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1295 LM		0 - 40	1107	88%
Luminaire Efficacy	97 LM/W		0 - 60	1234	98%
Maximum Candela	2200 CD		0 - 80	1261	100%

White Trim (3500K, 98CRI, 42°-Clear, 15W)

Polar Plot

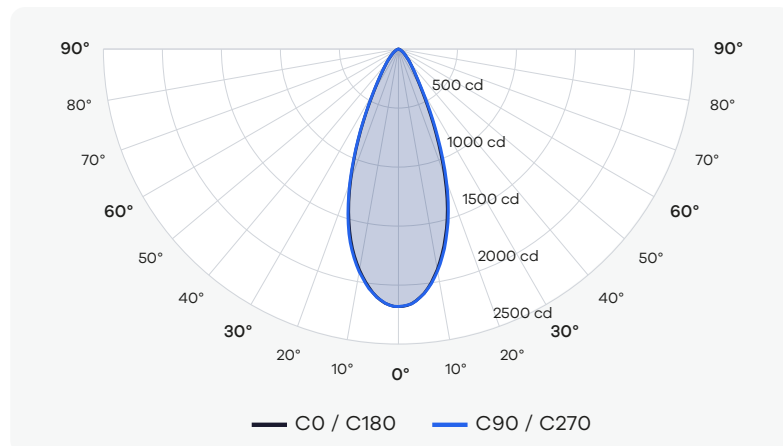

Cone of Light Tabulation

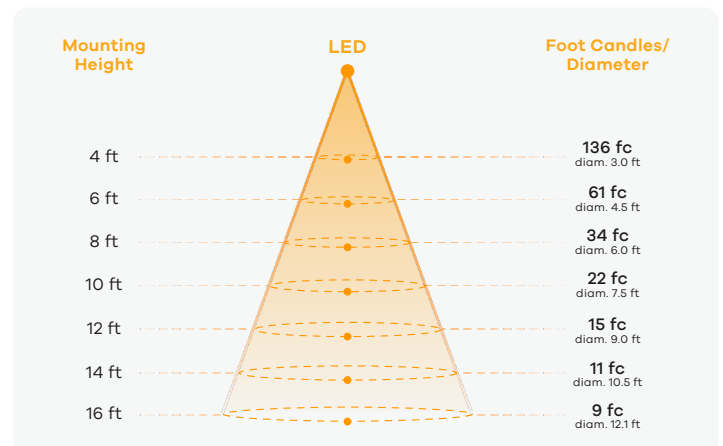

Power Information


Voltage	119.80 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1284 LM		0 - 40	1098	88%
Luminaire Efficacy	86 LM/W		0 - 60	1224	98%
Maximum Candela	2181 CD		0 - 80	1251	100%

White Trim (2700K, 98CRI, 53°-Clear, 15W)

Polar Plot

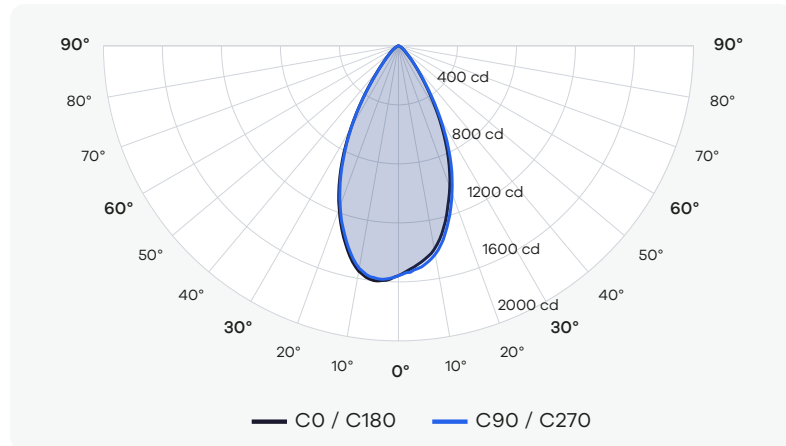

Cone of Light Tabulation

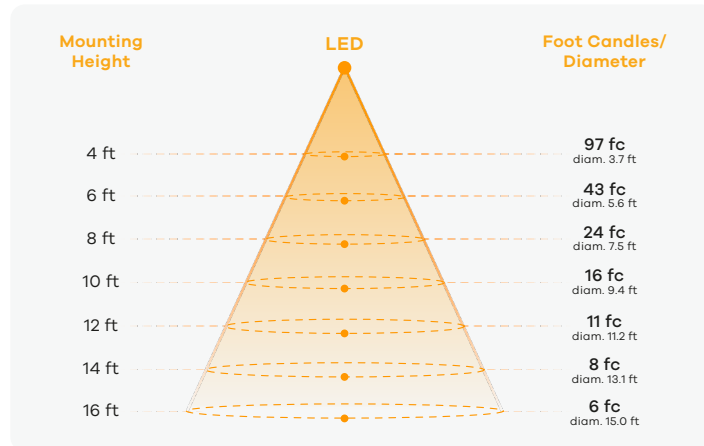

Power Information


Voltage	119.71 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1271 LM		0 - 40	1036	88%
Luminaire Efficacy	85 LM/W		0 - 60	1153	98%
Maximun Candela	1558 CD		0 - 80	1172	100%

White Trim (3000K, 98CRI, 53°-Clear, 15W)

Polar Plot

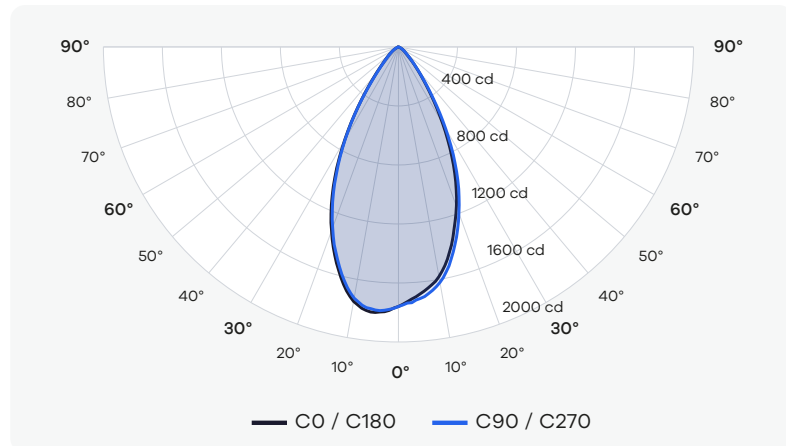

Cone of Light Tabulation

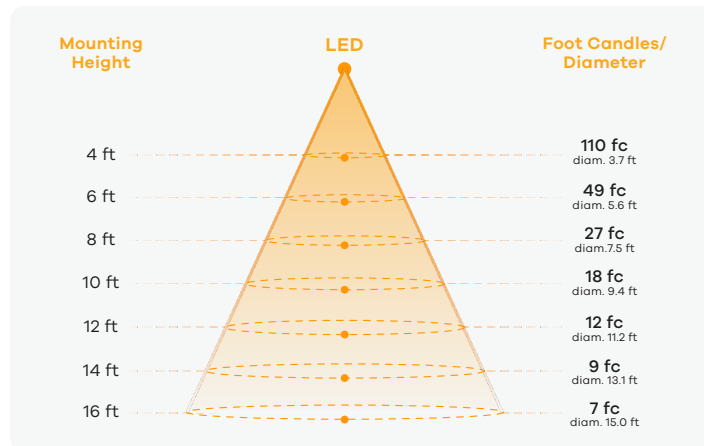

Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1435 LM		0 - 40	1170	88%
Luminaire Efficacy	107 LM/W		0 - 60	1302	98%
Maximun Candela	1759 CD		0 - 80	1323	100%

White Trim (3500K, 98CRI, 53°-Clear, 15W)

Polar Plot

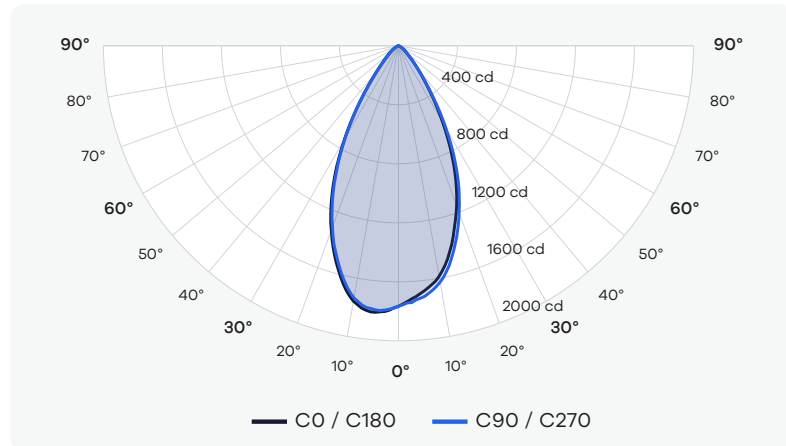

Cone of Light Tabulation

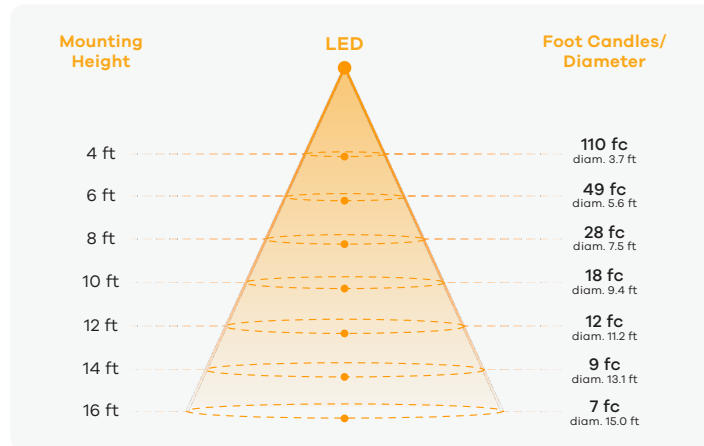

Power Information


Voltage	119.78 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1440 LM		0 - 40	1175	88%
Luminaire Efficacy	96 LM/W		0 - 60	1307	98%
Maximum Candela	1766 CD		0 - 80	1328	100%

White Trim (2700K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

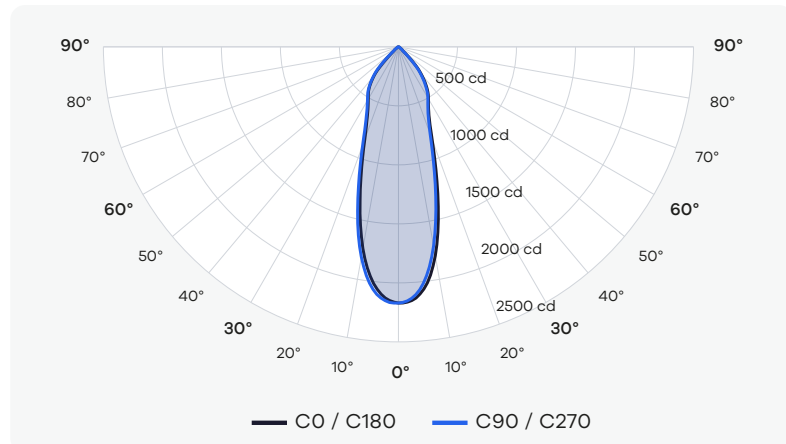

Cone of Light Tabulation

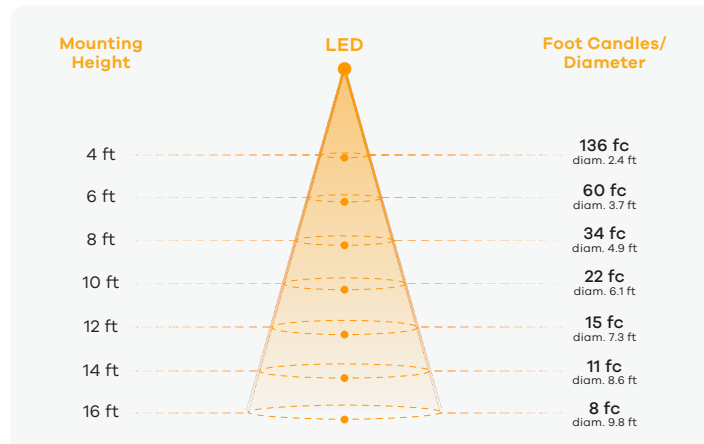

Power Information


Voltage	119.72 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1249 LM		0 - 40	1086	87%
Luminaire Efficacy	83 LM/W		0 - 60	1221	98%
Maximum Candela	2171 CD		0 - 80	1240	100%

White Trim (3000K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

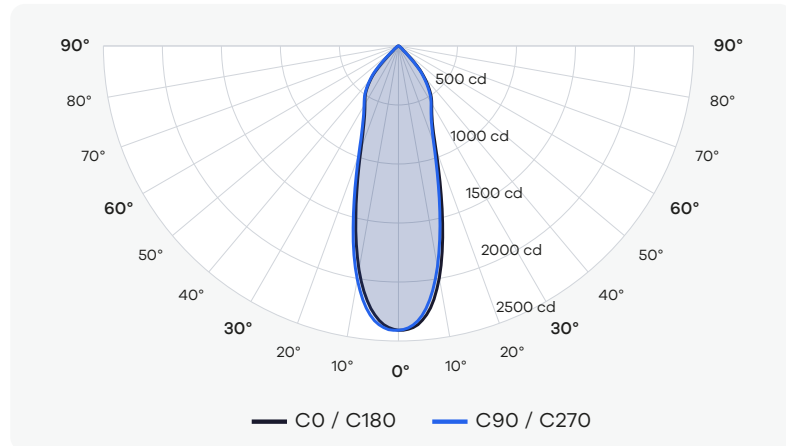

Cone of Light Tabulation

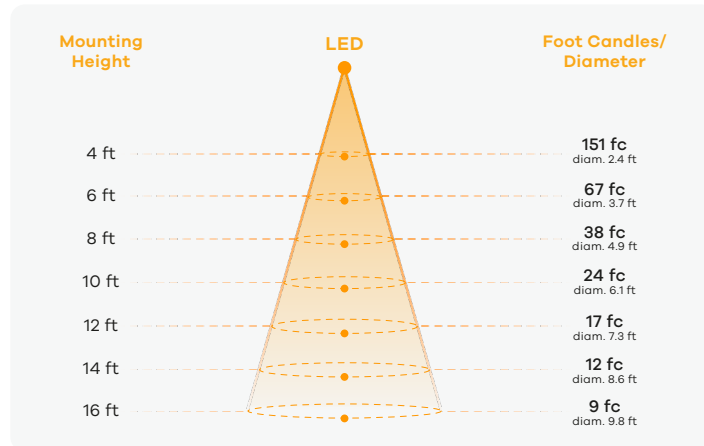

Power Information


Voltage	119.79 V
Current	0.1172 A
Power	13.7 W
Power Factor	0.9785

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1386 LM		0 - 40	1205	87%
Luminaire Efficacy	104 LM/W		0 - 60	1355	98%
Maximun Candela	2409 CD		0 - 80	1376	100%

White Trim (3500K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

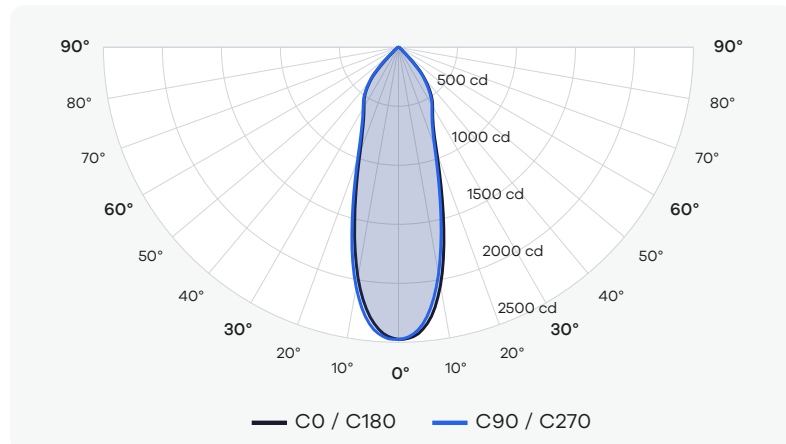

Cone of Light Tabulation

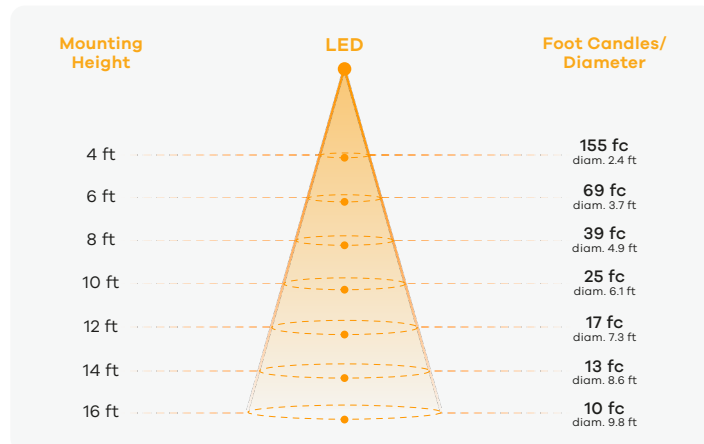

Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1424 LM		0 - 40	1238	87%
Luminaire Efficacy	95 LM/W		0 - 60	1392	98%
Maximun Candela	2475 CD		0 - 80	1413	100%

White Trim (2700K, 98CRI, 53°-Silver Reflector, 15W)

Polar Plot

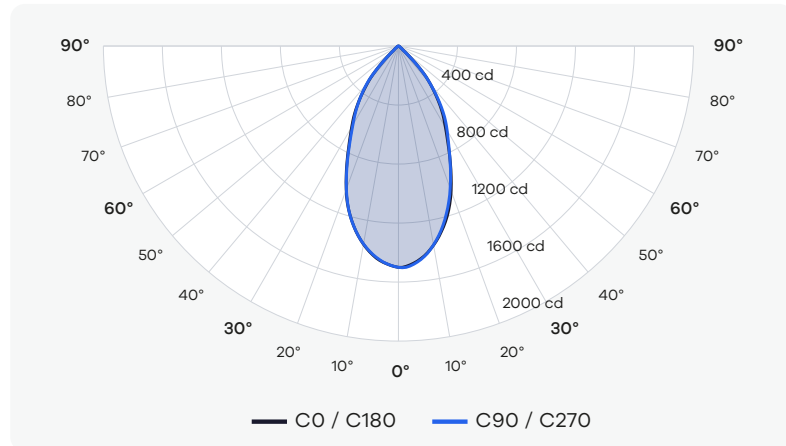

Cone of Light Tabulation

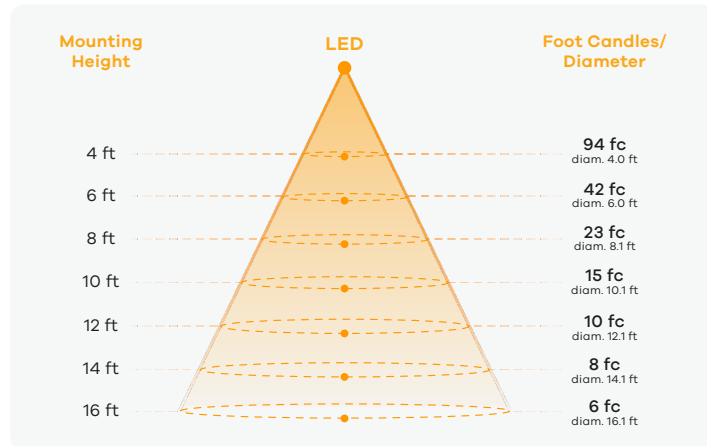

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.5	90 - 270: 0.5	Zone	Lumens	% of Luminaire
Total Lumen Output	1304 LM		0 - 40	1159	88%
Luminaire Efficacy	98 LM/W		0 - 60	1302	99%
Maximum Candela	1500 CD		0 - 80	1316	100%

White Trim (3000K, 98CRI, 53°-Silver Reflector, 15W)

Polar Plot

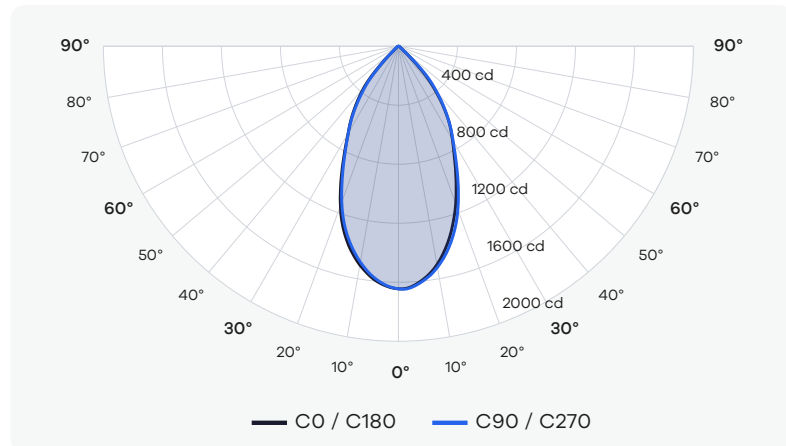

Cone of Light Tabulation

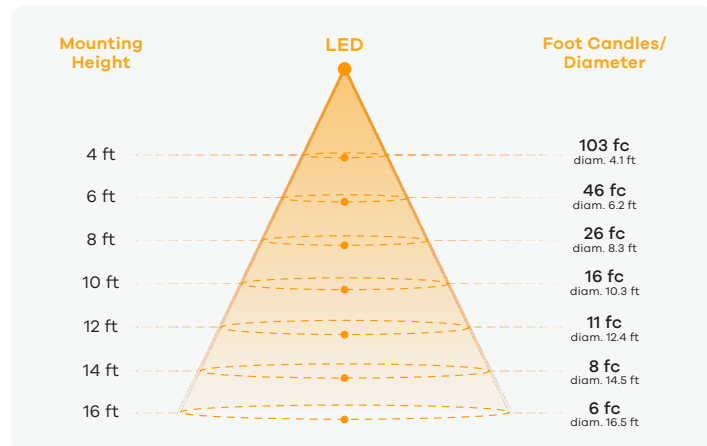

Power Information


Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results


Spacing Criteria	0 - 180: 0.52	90 - 270: 0.52	Zone	Lumens	% of Luminaire
Total Lumen Output	1446 LM		0 - 40	1294	88%
Luminaire Efficacy	108 LM/W		0 - 60	1457	99%
Maximum Candela	1645 CD		0 - 80	1475	100%

White Trim (3500K, 98CRI, 53°-Silver Reflector, 15W)

Polar Plot

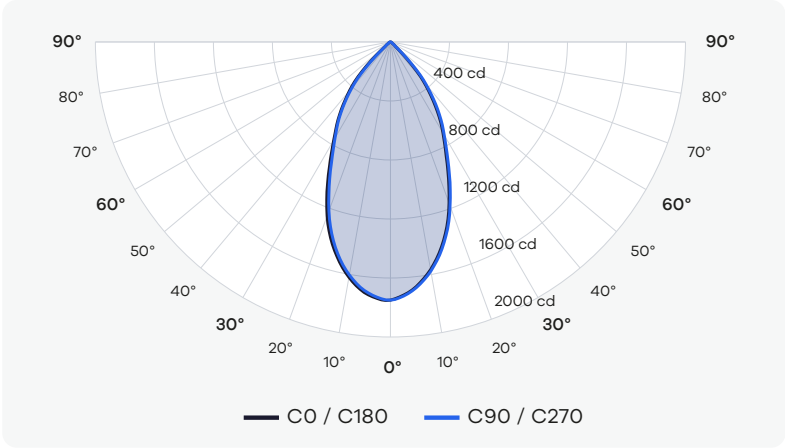

Cone of Light Tabulation

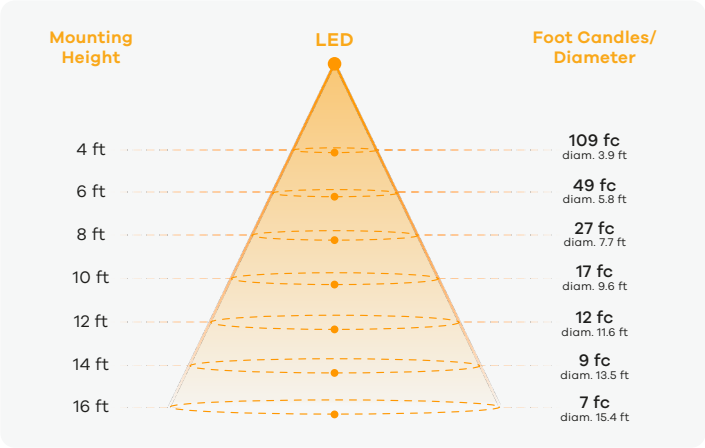

Power Information

Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	1523 LM		0 - 40	1292	90%
Luminaire Efficacy	114 LM/W		0 - 60	1423	99%
Maximun Candela	1750 CD		0 - 80	1437	100%