

ASTER 1"

INTERCHANGEABLE MODULE

G-48170



G-48470



G-48468



ITEM	G-48170		
DESCRIPTION	M1/5W/LED/5CCT	CRI	>90
COLOR TEMP	27, 30, 35, 41, 50K	mA	110mA
OUTPUT LUMEN	350	IC RATED	Yes
BEAM ANGLE	40°	DIMMABLE	Triac
WATTAGE	5W	PACKED	18
INPUT VOLTS	120V		
PLENUM RATED	FT6		

ITEM	G-48470		
DESCRIPTION	M1/7W/LED/5CCT	CRI	>90
COLOR TEMP	27, 30, 35, 41, 50K	mA	150mA
OUTPUT LUMEN	600	EQUIV. WATTS	50W
BEAM ANGLE	40°	IC RATED	Yes
WATTAGE	7W	DIMMABLE	Triac or 0-10V
INPUT VOLTS	120/277V	PACKED	18
PLENUM RATED	FT6		

ITEM	G-48468		
DESCRIPTION	M1/15W/LED/5CCT	CRI	>90
COLOR TEMP	27, 30, 35, 41, 50K	mA	350mA
OUTPUT LUMEN	1100	EQUIV. WATTS	120W
BEAM ANGLE	60°	IC RATED	No
WATTAGE	15W	DIMMABLE	Triac Or 0-10V
INPUT VOLTS	120-277V	PACKED	18
PLENUM RATED	FT6		

Content

Aster 1" Interchangeable Module	1
Lens Options	2
Accessories	2
Driver Box	2
Trims	3
Shallow Trims	4
Trimless	5
Millwork Trimless	6
Dimmer List	6
Multihead Trimless	7



- SOFT WHITE 2700K
- WARM WHITE 3000K
- NEUTRAL WHITE 3500K
- COOL WHITE 4100K
- SUPER WHITE 5000K



Interchangeable
lens



Dimmable:
5%




Lifetime:
50,000 hours



Warranty:
3 years



Lens Options



Clear Lens for 48470

G-10940

G-10941



L1/ 24-DEGREE

L1/ 40-DEGREE

Clear Lens for 48468

G-10940

G-10941



L1/ 40-DEGREE

L1/ 60-DEGREE

Lens Covers

G-10942

G-10943

G-10938



1/SOLITE LENS



1/PRISMATIC LENS



1/BEAMSPLIT LENS

Frosted Lens

G-10939



L1/FROSTED/80°

Diffuser

G-21751



1/HEX/HC/DIFFUSER

STYLE

PACK

LENS OPTIONS

100

Accessories



Emergency LED Driver

15W G-48410

60W G-95521

30W G-48411

25W G-95525



Extension Cords

G-20247 5ft

G-20248 10ft

G-19822 20ft

G-19823 30ft




Multi Driver Converter

G-48470 use G-95823 7W

G-48468 use G-95825 14W

G-48170 use G-95823 5W




Construction Plate


G-19975

Driver Box


G-48470

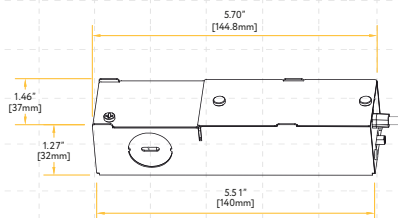


G-48468




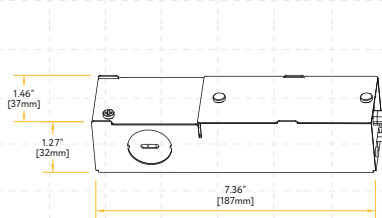


G-48170

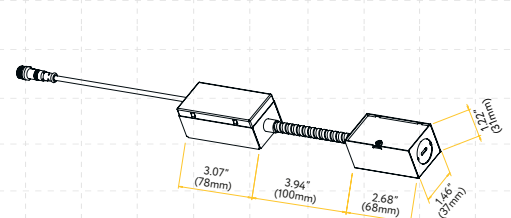


Trims Options


White	Black	Two-tone	Bronze	Brushed Nickel	Brushed Brass	White Baffle
G-48471	G-48473	G-48475	G-48477	G-48479	G-48481	G-22210
						
T1/R/W	T1/R/B	T1/R/BW	T1/R/BZ	T1/R/BN	T1/R/BB	T1/R/W/BF

G-48472	G-48474	G-48476	G-48478	G-48480	G-48482
					
T1/SQ/W	T1/SQ/B	T1/SQ/BW	T1/SQ/BZ	T1/SQ/BN	T1/SQ/BB

STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
TRIMMED	1.90"	2.25"	W/G-48170 1.80" / W/G-48470 2.69" / W/G-48468 4.47"	G-19975	8/128

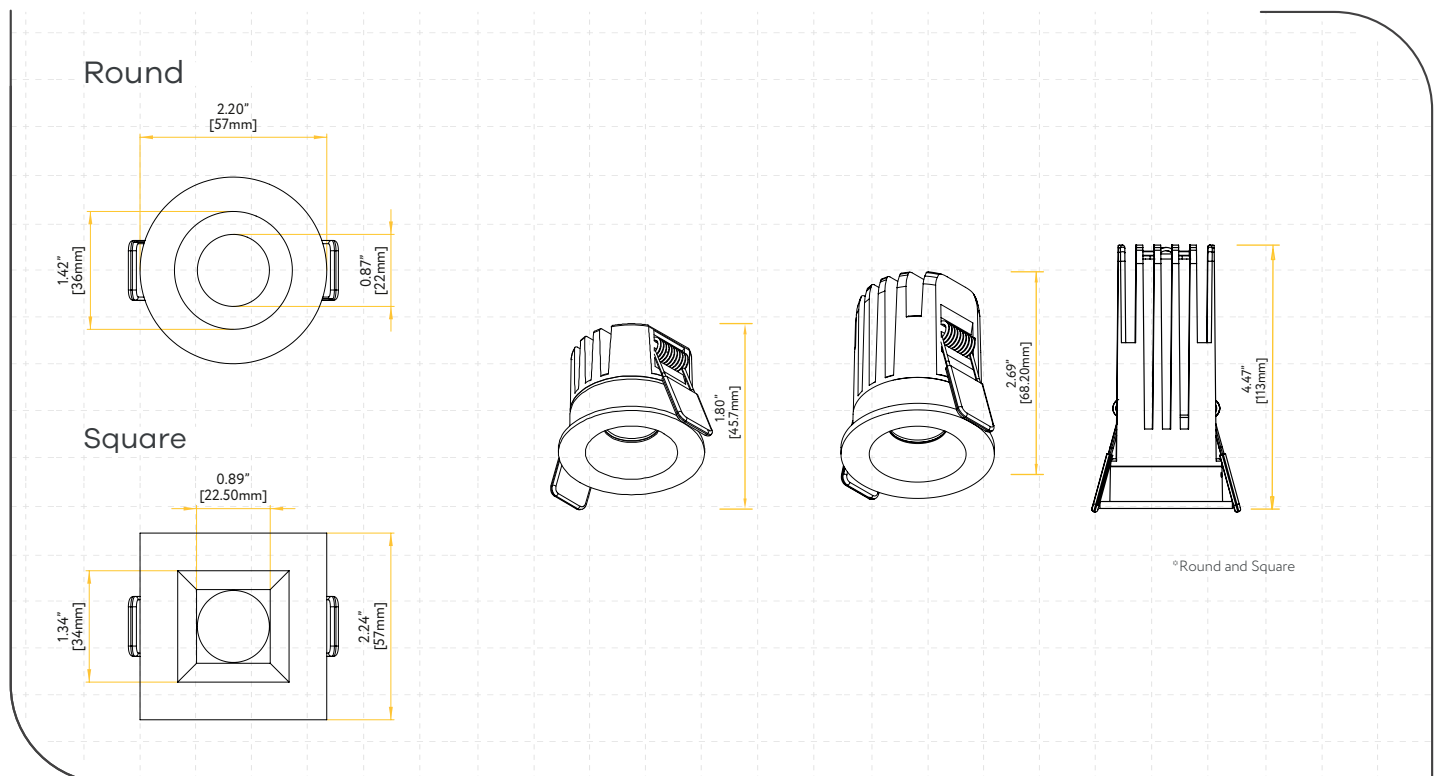

Shallow Trims Options

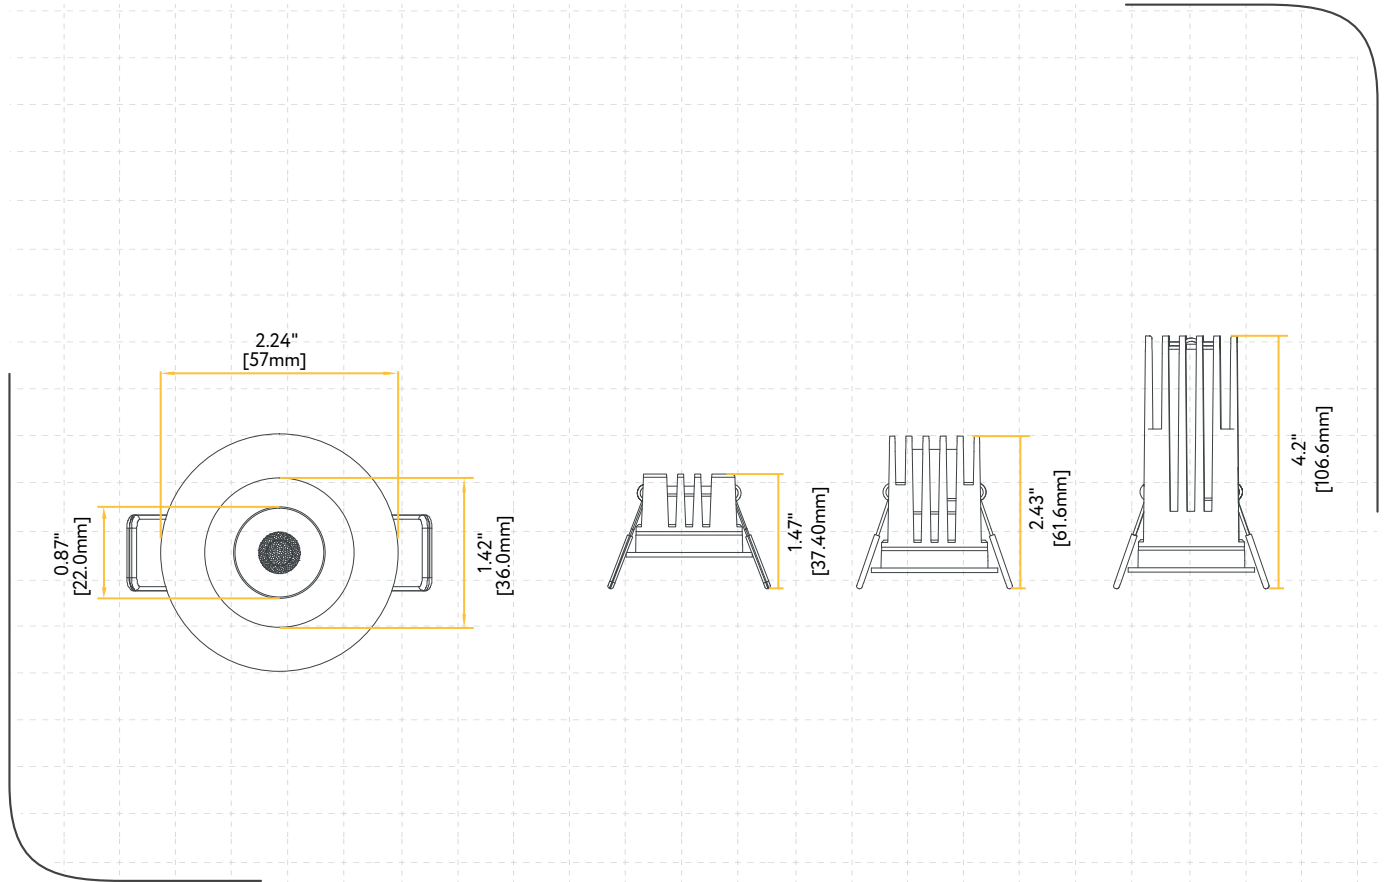





STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
SHALLOW	1.90"	2.25	W/G-48170 1.47" W/G-48470 2.43" W/G-48468 4.2"	G-19975	64

Trimless Options







STYLE	CUT OUT	OD	HEIGHT	PLATE	PACK
TRIMLESS ROUND	2.30"	3.94"	W/G-48170 1.94" / W/G-48470 2.84" / W/G-48468 4.60"	G-19975 1 Punch Out	36
TRIMLESS SQUARE	Sq 2.72" / Rd 3.82"	5.51"	W/G-48170 2.50" / W/G-48470 3.23" / W/G-48468 5.15"	G-19975 4 Punch Out	36



Round



Square



Millwork Trimless

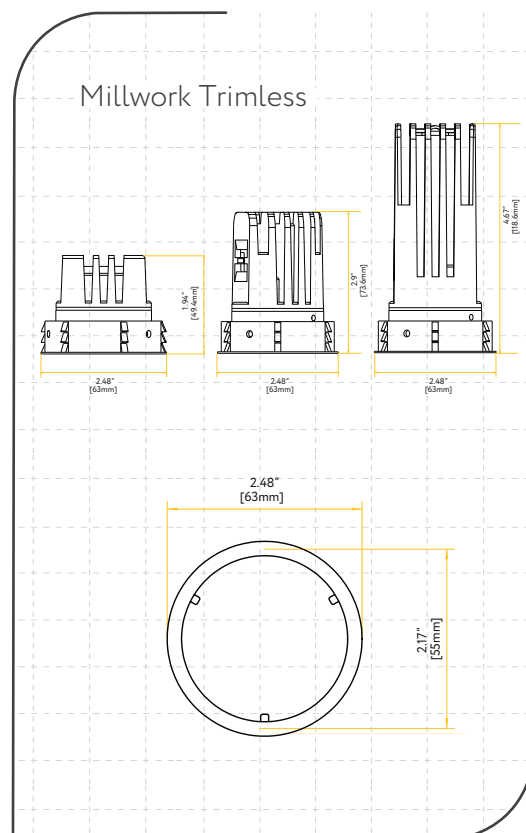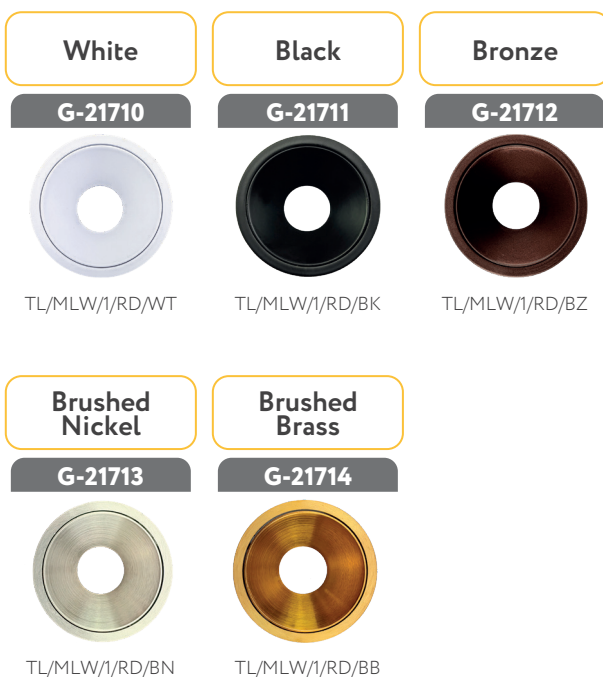




STYLE	CUT OUT	OD	HEIGHT
MILLWORK TRIMLESS	2.32"	2.48"	W/G-48170 1.94" / W/G-48470 2.9" / W/G-48468 4.67"

Dimmer List



BRAND	SERIES	MODEL	LOAD	BRAND	SERIES	MODEL	LOAD
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W		SURESLIDE	6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	10464	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W

1" MULTI HEAD INTERCHANGEABLE TRIMLESS KITS

ROUND OPTIONS

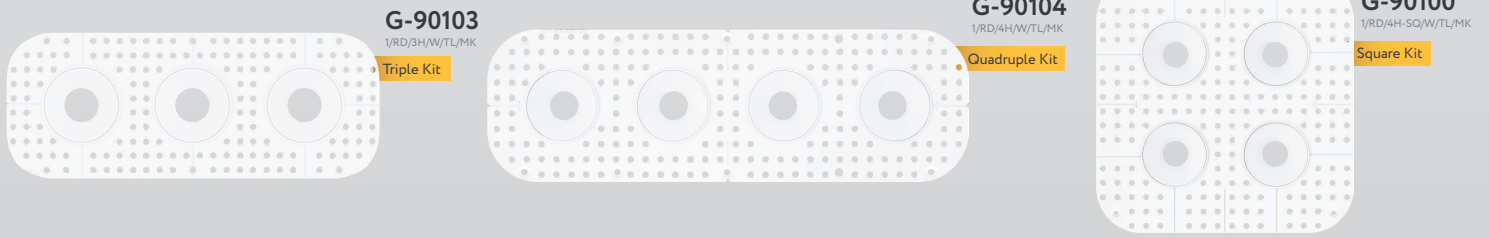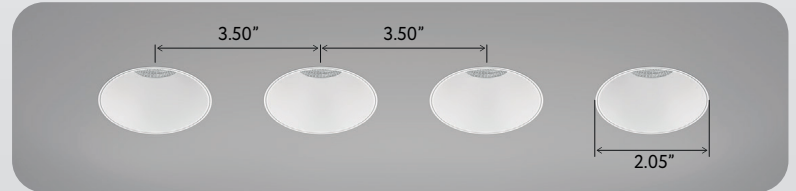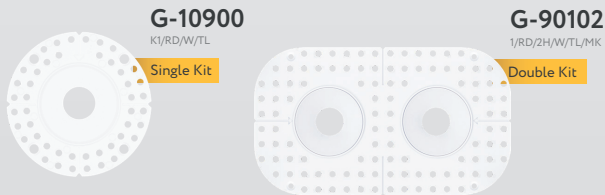


Dimensions

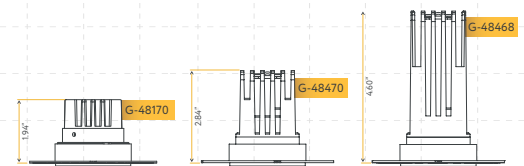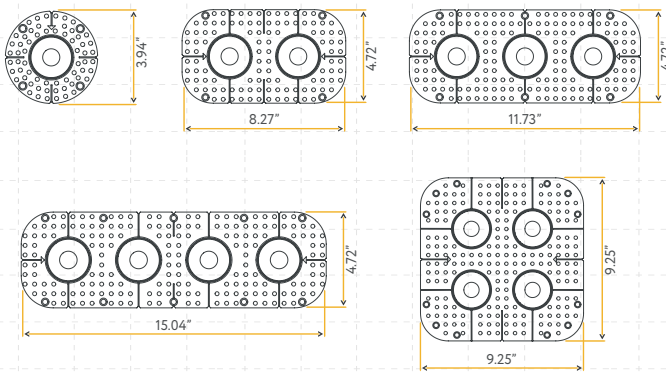

STYLE	CUT OUT	PLATE	PACK
1 HEAD	2.30"	G-19975 (1)	36
2 HEADS	2.28" X 5.75"	G-98821 (1)	36
3 HEADS	2.28" X 9.21"	G-48449 (0)	36
4 HEADS	2.28" X 12.68"	G-98821 (5)	36
4 HEADS SQUARE	5.75" X 5.75"	G-98818 (0)	12

SQUARE OPTIONS

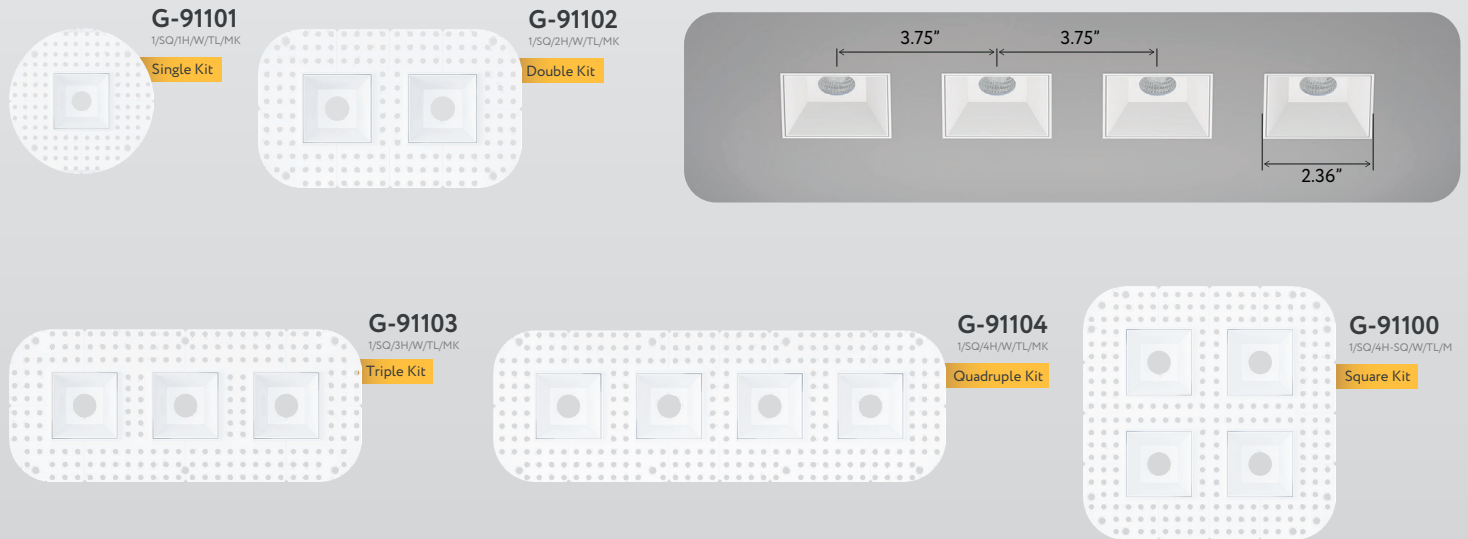

Dimensions

