



White Trim (2700K, 98CRI, 35°-Clear, 28W)

Polar Plot

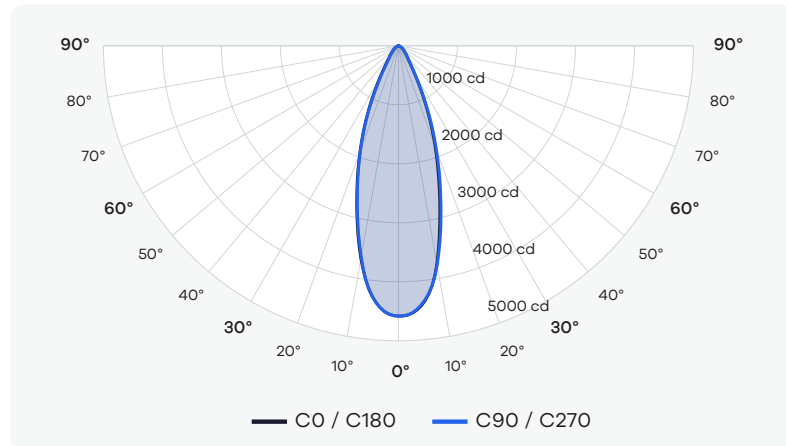

Cone of Light Tabulation

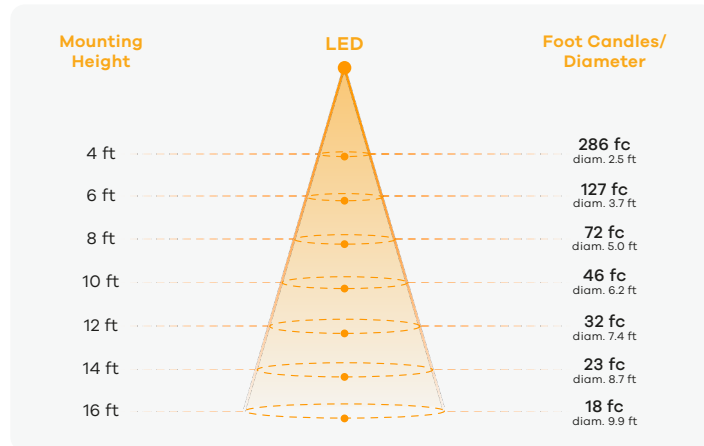

Power Information


Voltage	119.67 V
Current	0.2306 A
Power	27.1 W
Power Factor	0.9816

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2122 LM		0 - 40	1852	88%
Luminaire Efficacy	76 LM/W		0 - 60	2051	97%
Maximun Candela	4581 CD		0 - 80	2100	100%

White Trim (3000K, 98CRI, 35°-Clear, 28W)

Polar Plot

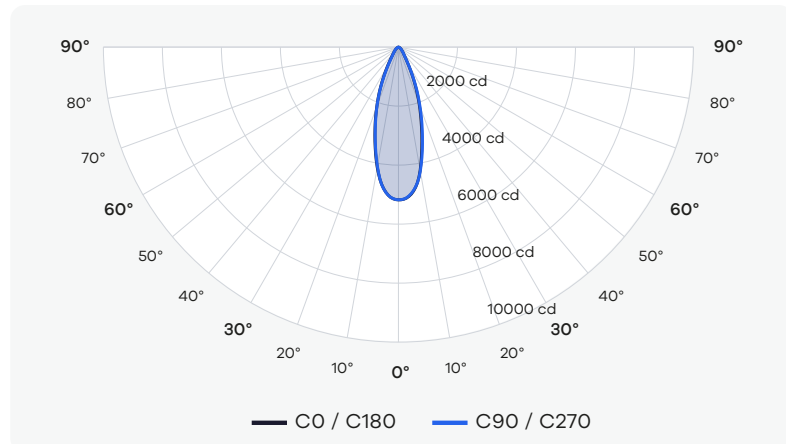

Cone of Light Tabulation

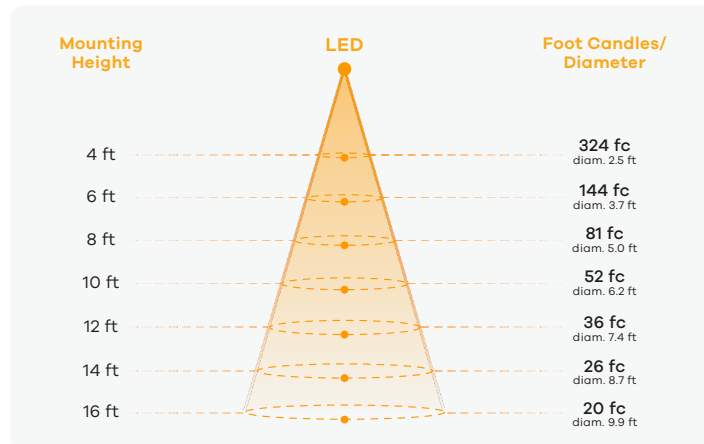

Power Information


Voltage	119.68 V
Current	0.2344 A
Power	27.6 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2398 LM		0 - 40	2093	88%
Luminaire Efficacy	90 LM/W		0 - 60	2317	97%
Maximun Candela	5177 CD		0 - 80	2372	100%

White Trim (3500K, 98CRI, 35°-Clear, 28W)

Polar Plot

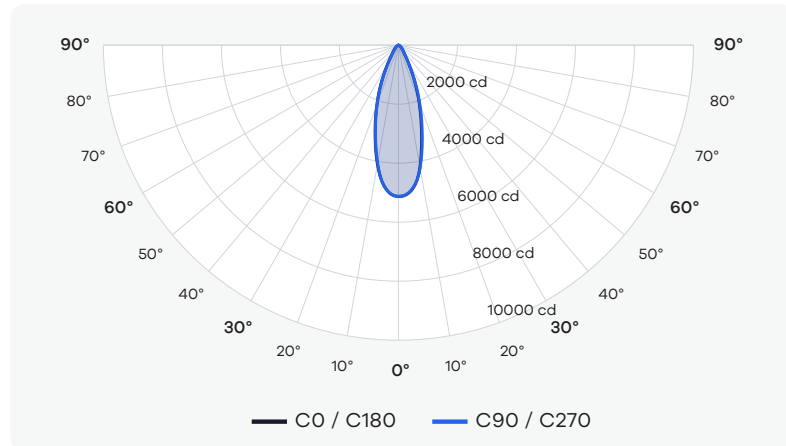

Cone of Light Tabulation

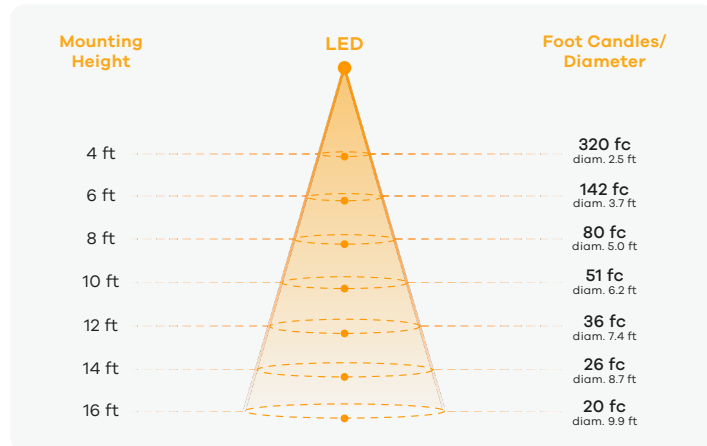

Power Information


Voltage	119.71 V
Current	0.2307 A
Power	27.1 W
Power Factor	0.9818

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2375 LM		0 - 40	2073	88%
Luminaire Efficacy	85 LM/W		0 - 60	2294	97%
Maximun Candela	5126 CD		0 - 80	2349	100%

White Trim (2700K, 98CRI, 42°-Clear, 28W)

Polar Plot

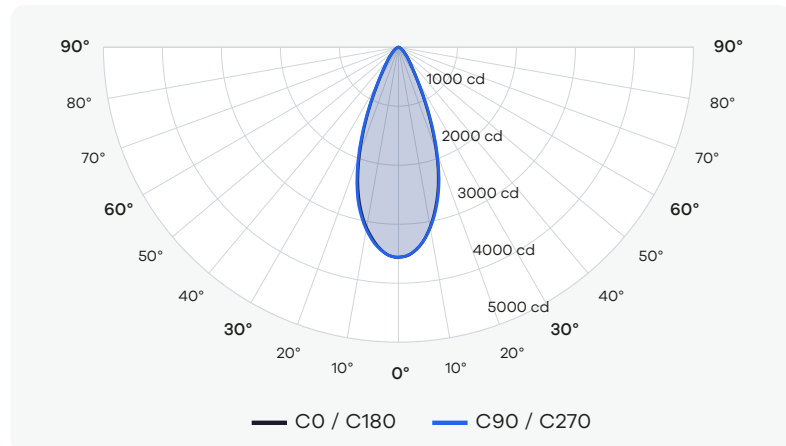

Cone of Light Tabulation

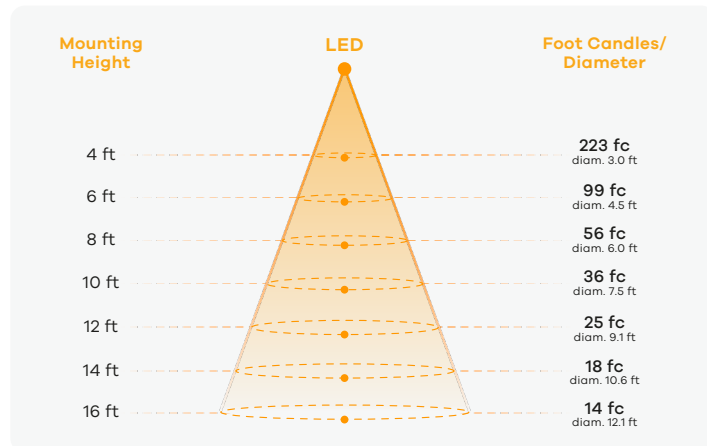

Power Information


Voltage	119.70 V
Current	0.2301 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2095 LM		0 - 40	1792	88%
Luminaire Efficacy	75 LM/W		0 - 60	1996	98%
Maximun Candela	3561 CD		0 - 80	2040	100%

White Trim (3000K, 98CRI, 42°-Clear, 28W)

Polar Plot

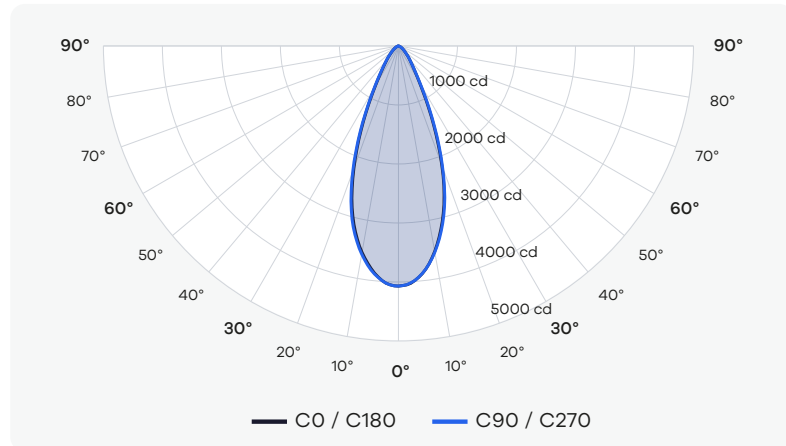

Cone of Light Tabulation

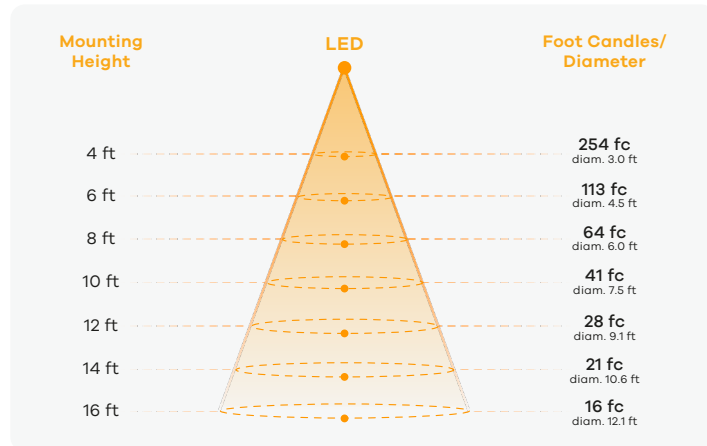

Power Information


Voltage	119.69 V
Current	0.2339 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2394 LM		0 - 40	2048	88%
Luminaire Efficacy	90 LM/W		0 - 60	2281	98%
Maximun Candela	4070 CD		0 - 80	2331	100%

White Trim (3500K, 98CRI, 42°-Clear, 28W)

Polar Plot

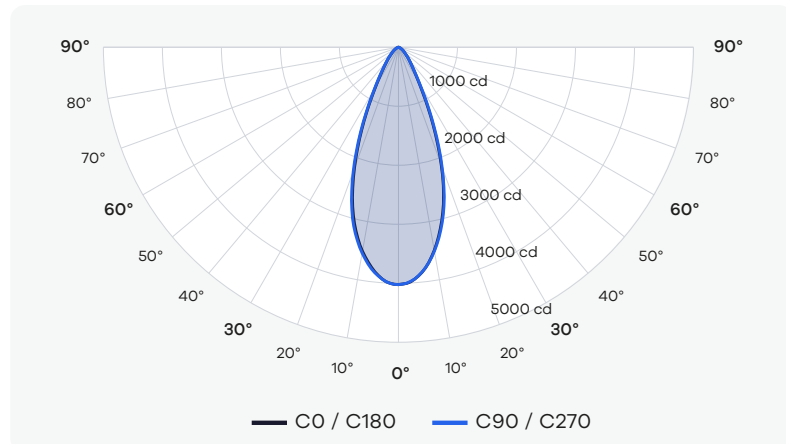

Cone of Light Tabulation

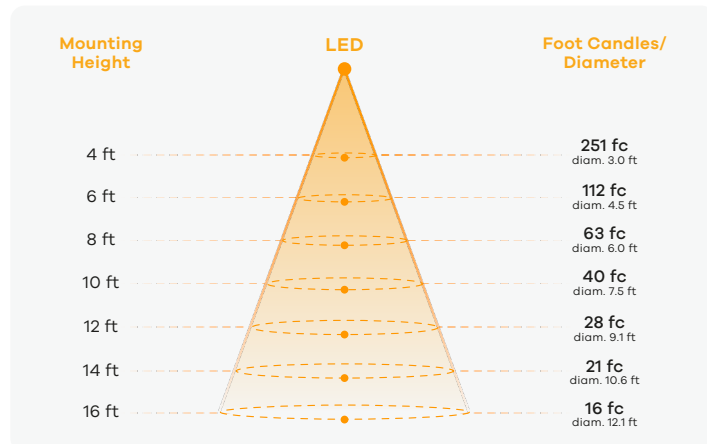

Power Information


Voltage	119.71 V
Current	0.2305 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	2366 LM		0 - 40	2024	88%
Luminaire Efficacy	85 LM/W		0 - 60	2255	98%
Maximun Candela	4023 CD		0 - 80	2304	100%

White Trim (2700K, 98CRI, 53°-Clear, 28W)

Polar Plot

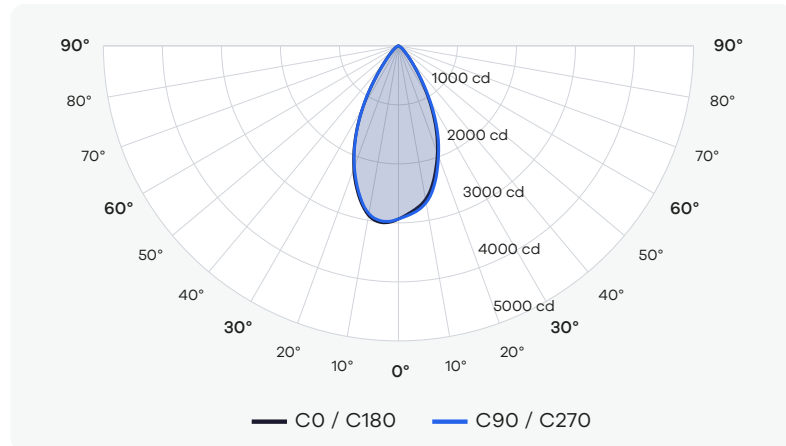

Cone of Light Tabulation

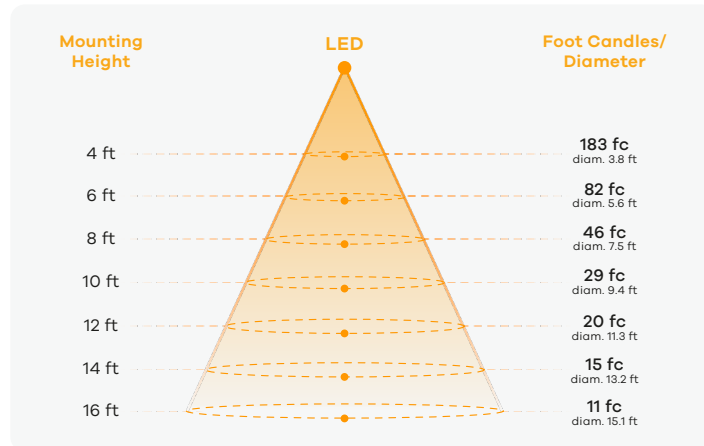

Power Information


Voltage	119.69 V
Current	0.2299 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	2390 LM		0 - 40	1965	89%
Luminaire Efficacy	85 LM/W		0 - 60	2179	98%
Maximun Candela	2934 CD		0 - 80	2211	100%

White Trim (3000K, 98CRI, 53°-Clear, 28W)

Polar Plot

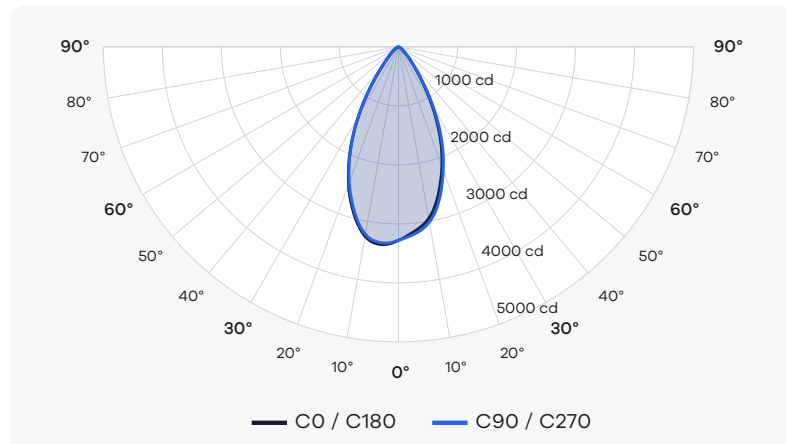

Cone of Light Tabulation

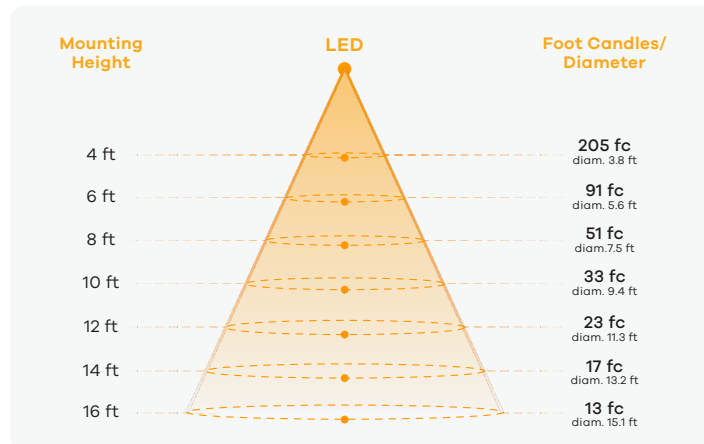

Power Information


Voltage	119.70 V
Current	0.2337 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	2672 LM		0 - 40	2196	89%
Luminaire Efficacy	100 LM/W		0 - 60	2435	98%
Maximun Candela	3280 CD		0 - 80	2471	100%

White Trim (3500K, 98CRI, 53°-Clear, 28W)

Polar Plot

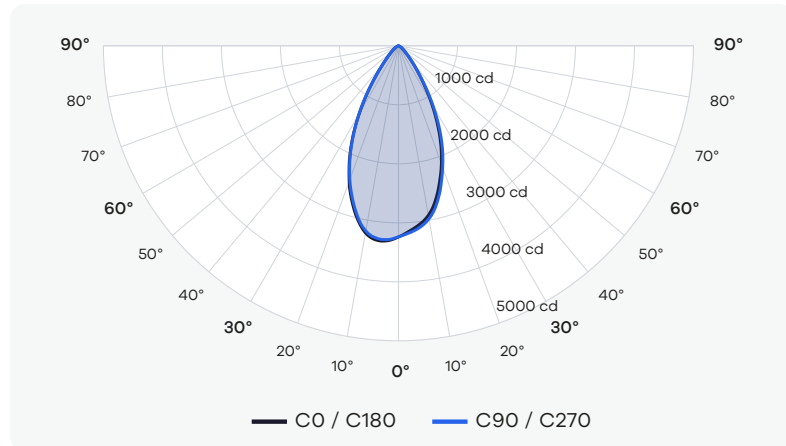

Cone of Light Tabulation

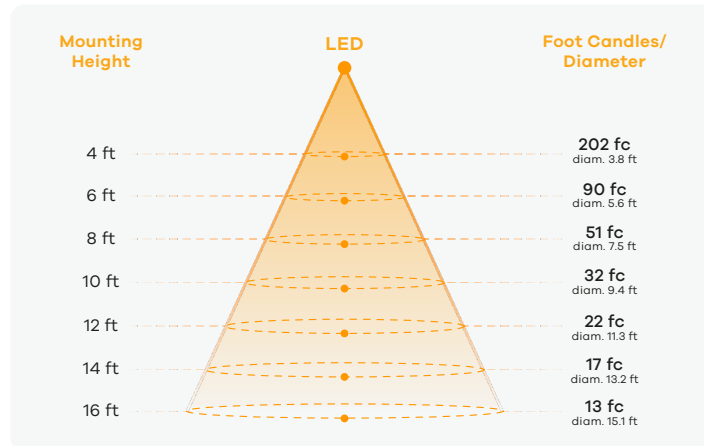

Power Information


Voltage	119.71 V
Current	0.2302 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	2639 LM		0 - 40	2170	89%
Luminaire Efficacy	94 LM/W		0 - 60	2406	98%
Maximun Candela	3240 CD		0 - 80	2441	100%

White Trim (2700K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

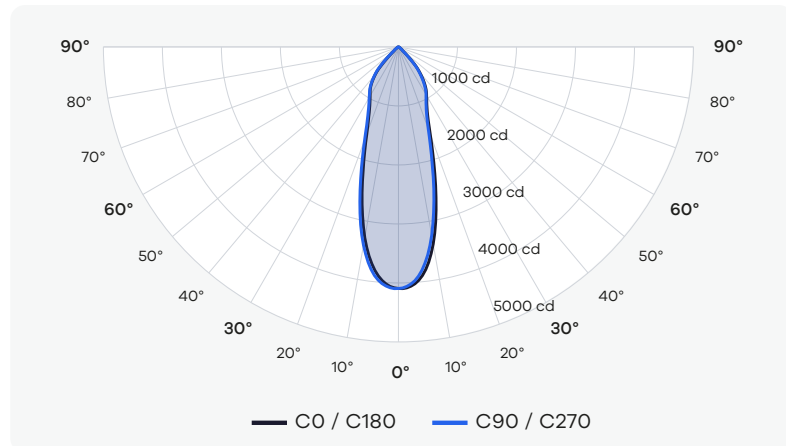

Cone of Light Tabulation

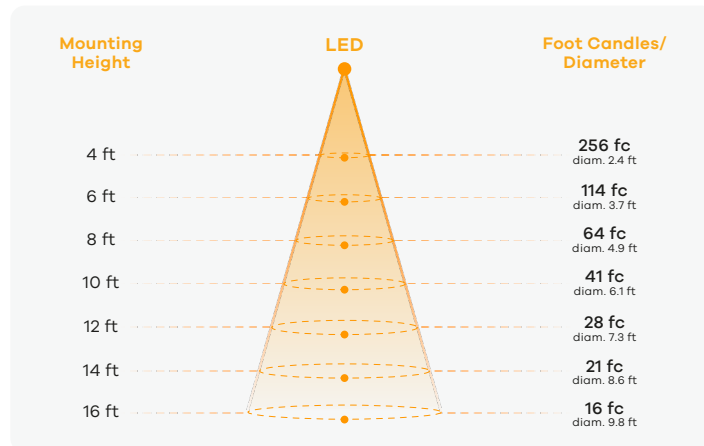

Power Information


Voltage	119.68 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2355 LM		0 - 40	2045	88%
Luminaire Efficacy	84 LM/W		0 - 60	2298	98%
Maximun Candela	4094 CD		0 - 80	2333	100%

White Trim (3000K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

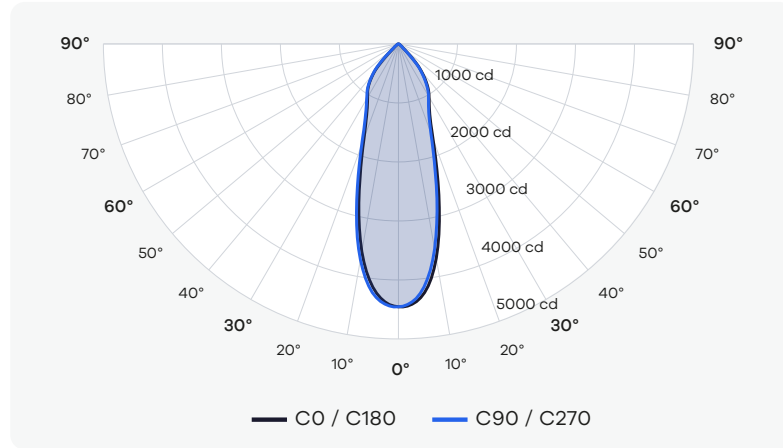

Cone of Light Tabulation

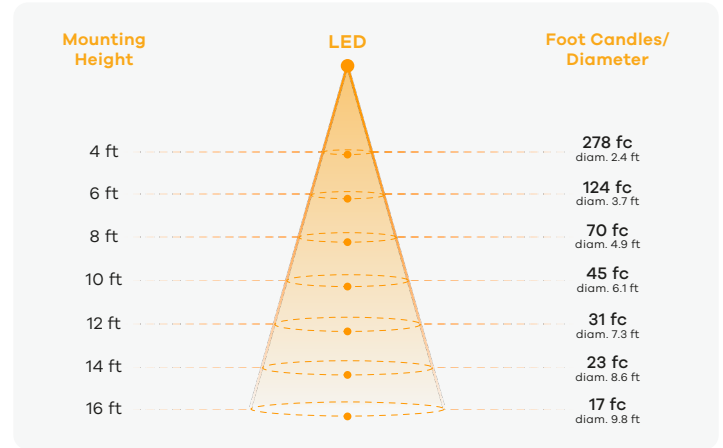

Power Information


Voltage	119.69 V
Current	0.2335 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2563 LM		0 - 40	2226	88%
Luminaire Efficacy	96 LM/W		0 - 60	2501	98%
Maximun Candela	4454 CD		0 - 80	2539	100%

White Trim (3500K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

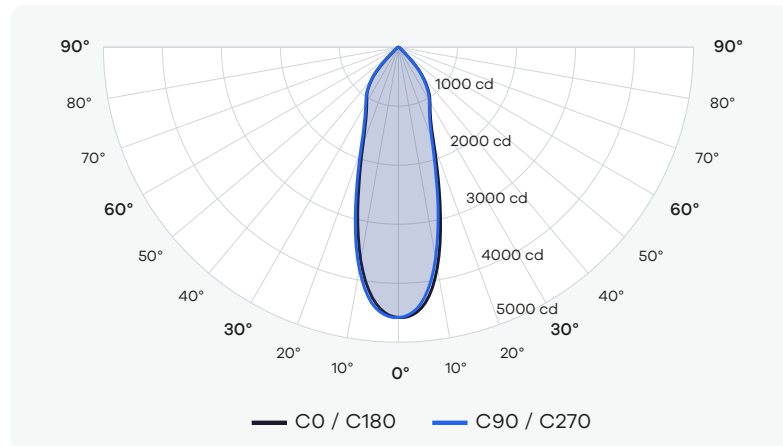

Cone of Light Tabulation

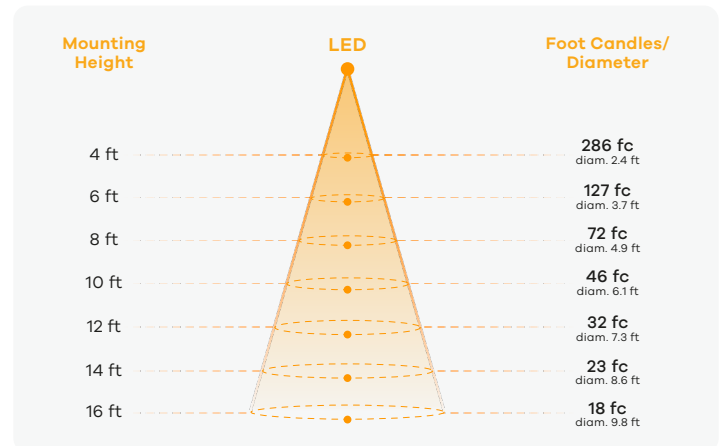

Power Information


Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2635 LM		0 - 40	2288	88%
Luminaire Efficacy	94 LM/W		0 - 60	2571	98%
Maximun Candela	4580 CD		0 - 80	2610	100%

White Trim (2700K, 98CRI, 53°-Silver Reflector, 28W)

Polar Plot

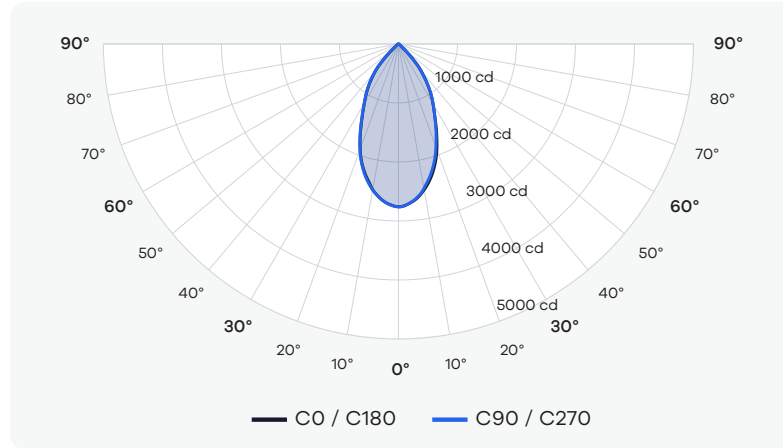

Cone of Light Tabulation

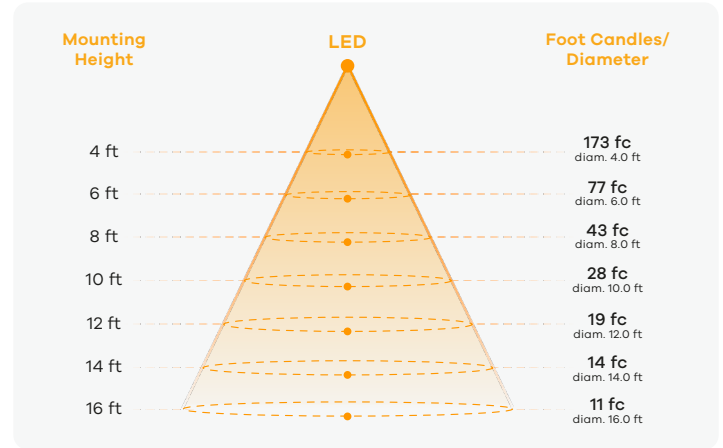

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.5	90 - 270: 0.5	Zone	Lumens	% of Luminaire
Total Lumen Output	2388 LM		0 - 40	2115	88%
Luminaire Efficacy	90 LM/W		0 - 60	2368	99%
Maximun Candela	2760 CD		0 - 80	2395	100%

White Trim (3000K, 98CRI, 53°-Silver Reflector, 28W)

Polar Plot

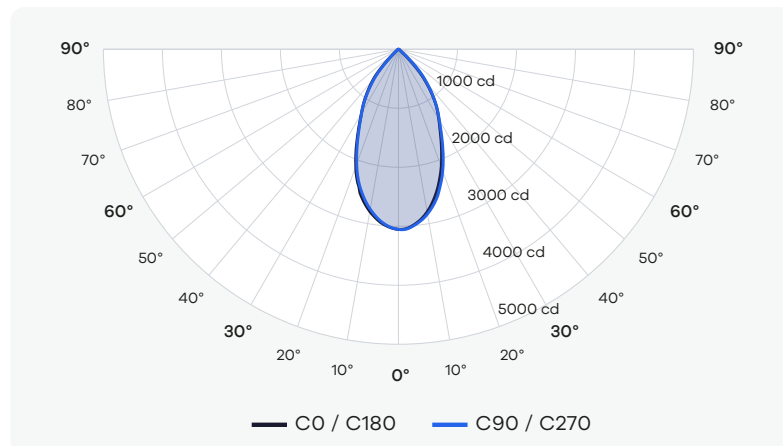

Cone of Light Tabulation

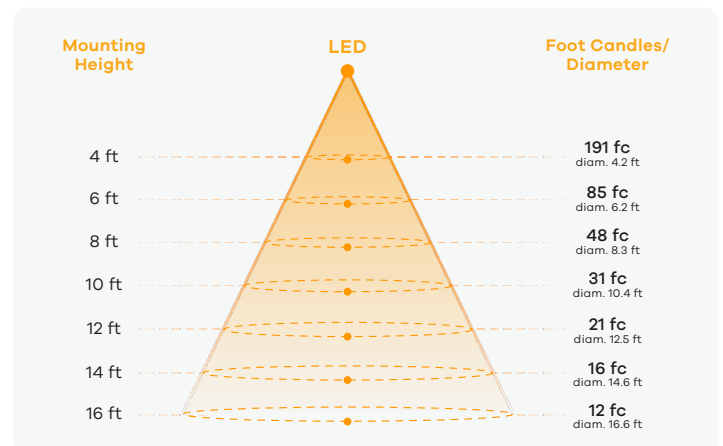

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.52	90 - 270: 0.52	Zone	Lumens	% of Luminaire
Total Lumen Output	2687 LM		0 - 40	2418	87%
Luminaire Efficacy	101 LM/W		0 - 60	2732	99%
Maximun Candela	3053CD		0 - 80	2764	100%

White Trim (3500K, 98CRI, 53°-Silver Reflector, 28W)

Polar Plot

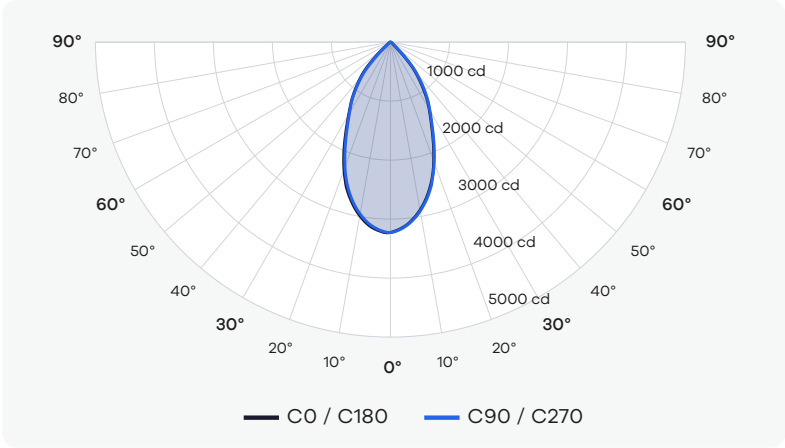

Cone of Light Tabulation

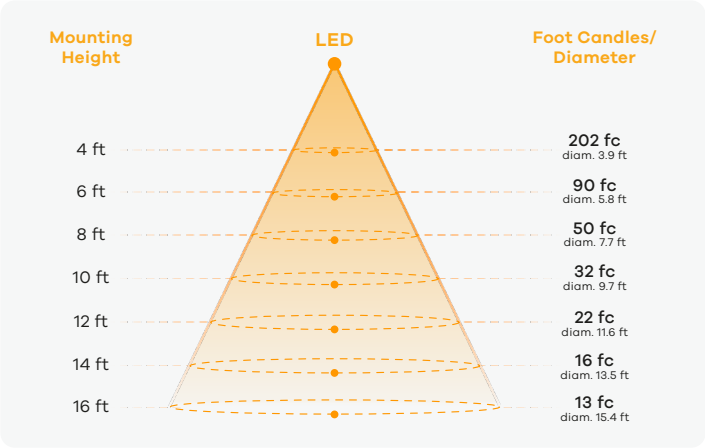

Power Information

Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2807 LM		0 - 40	2382	89%
Luminaire Efficacy	106 LM/W		0 - 60	2632	99%
Maximun Candela	3227 CD		0 - 80	2660	100%