



### White Trim (2700K, 98CRI, 35°-Clear, 28W)

#### Polar Plot

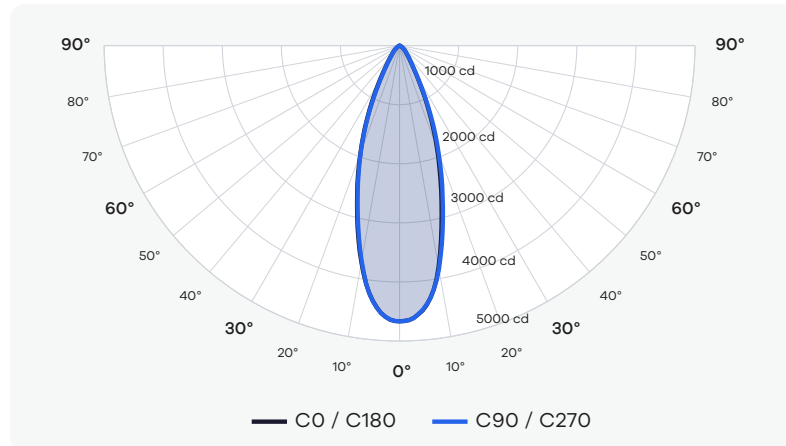

#### Cone of Light Tabulation

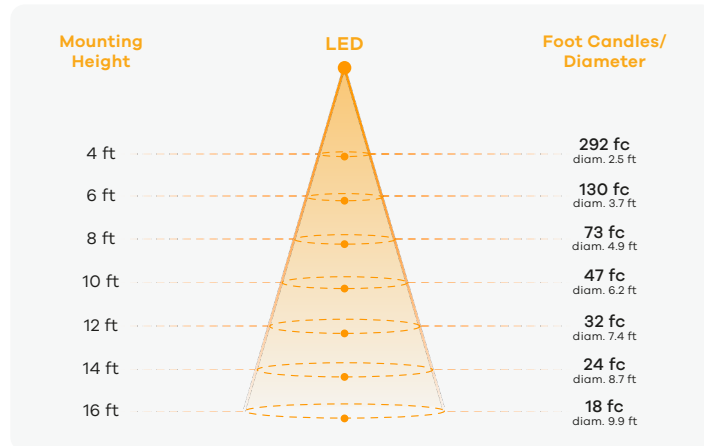

#### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.67 V |
| Current      | 0.2306 A |
| Power        | 27.1 W   |
| Power Factor | 0.9816   |

#### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.31 | 90 - 270: 0.31 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2131 LM       |                | 0 - 40 | 1879   | 91%            |
| Luminaire Efficacy | 76 LM/W       |                | 0 - 60 | 2046   | 99%            |
| Maximun Candela    | 4666 CD       |                | 0 - 80 | 2072   | 100%           |

### White Trim (3000K, 98CRI, 35°-Clear, 28W)

#### Polar Plot

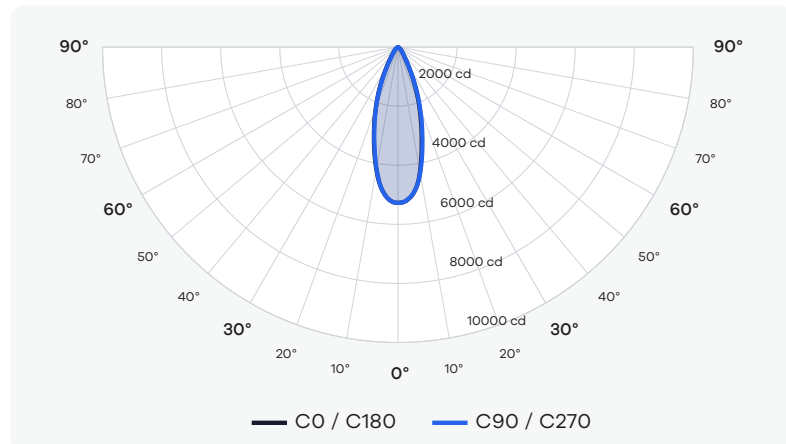

#### Cone of Light Tabulation

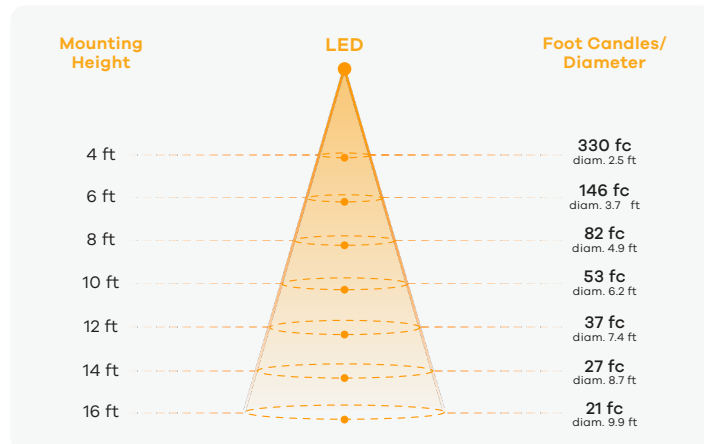

#### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.68 V |
| Current      | 0.2344 A |
| Power        | 27.6 W   |
| Power Factor | 0.9821   |

#### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.31 | 90 - 270: 0.31 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2408 LM       |                | 0 - 40 | 2124   | 91%            |
| Luminaire Efficacy | 90 LM/W       |                | 0 - 60 | 2312   | 99%            |
| Maximun Candela    | 5272 CD       |                | 0 - 80 | 2341   | 100%           |

## White Trim (3500K, 98CRI, 35°-Clear, 28W)

### Polar Plot

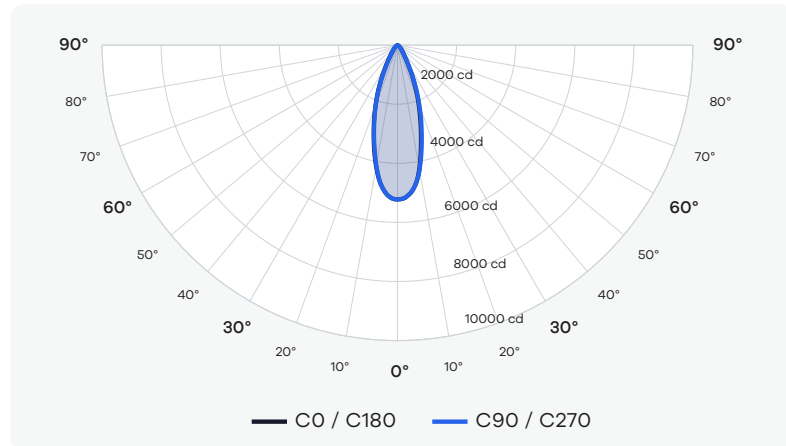

### Cone of Light Tabulation

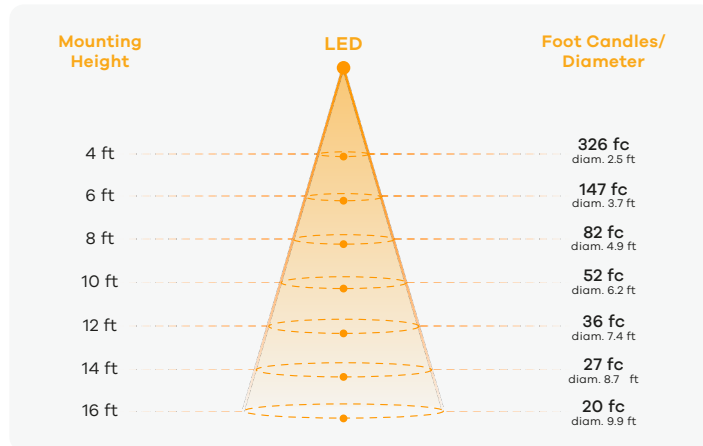

### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.71 V |
| Current      | 0.2307 A |
| Power        | 27.1 W   |
| Power Factor | 0.9818   |

### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.31 | 90 - 270: 0.31 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2384 LM       |                | 0 - 40 | 2103   | 91%            |
| Luminaire Efficacy | 85 LM/W       |                | 0 - 60 | 2289   | 99%            |
| Maximun Candela    | 5221 CD       |                | 0 - 80 | 2318   | 100%           |

## White Trim (2700K, 98CRI, 42°-Clear, 28W)

### Polar Plot

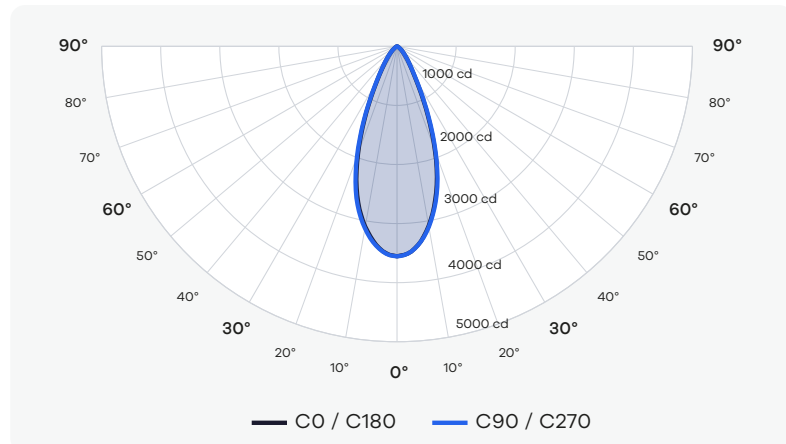

### Cone of Light Tabulation

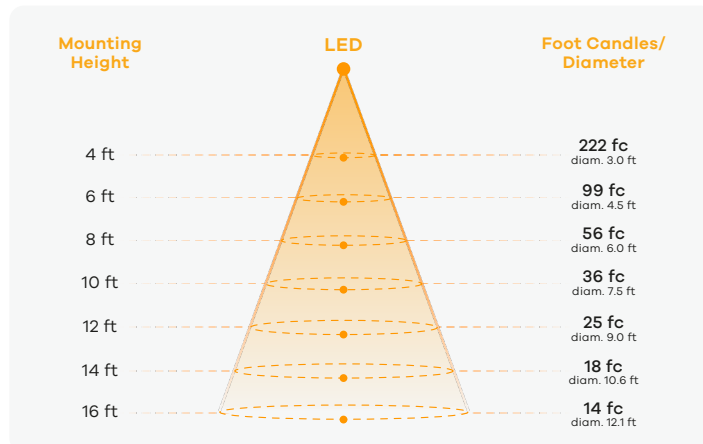

### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.70 V |
| Current      | 0.2301 A |
| Power        | 27.0 W   |
| Power Factor | 0.9815   |

### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.38 | 90 - 270: 0.38 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2055 LM       |                | 0 - 40 | 1783   | 90%            |
| Luminaire Efficacy | 73 LM/W       |                | 0 - 60 | 1949   | 99%            |
| Maximun Candela    | 3554 CD       |                | 0 - 80 | 1974   | 100%           |

## White Trim (3000K, 98CRI, 42°-Clear, 28W)

### Polar Plot

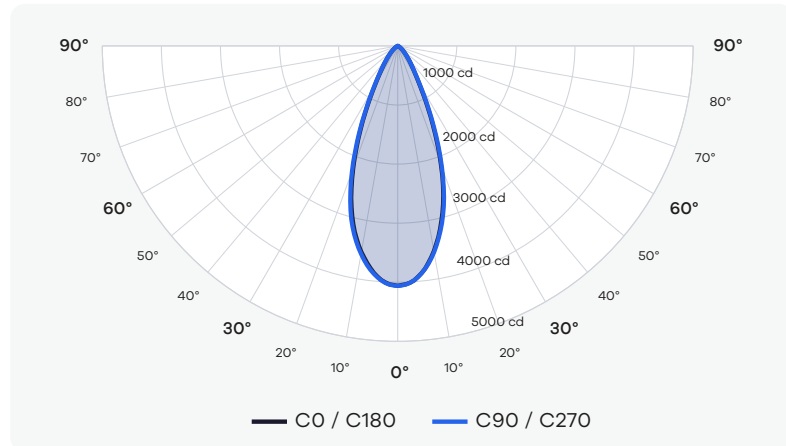

### Cone of Light Tabulation

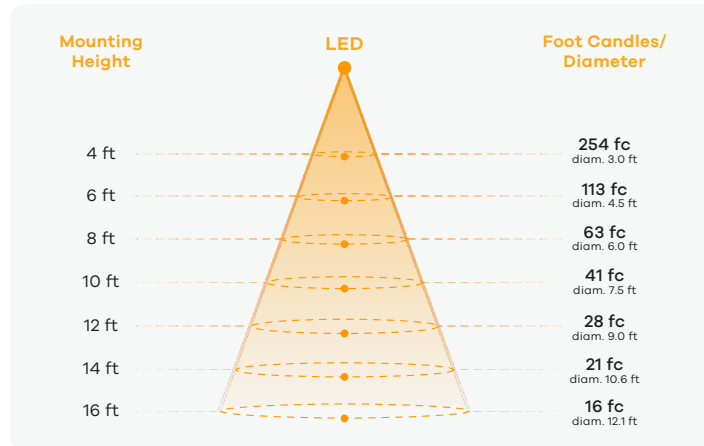

### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.69 V |
| Current      | 0.2339 A |
| Power        | 27.5 W   |
| Power Factor | 0.9821   |

### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.38 | 90 - 270: 0.38 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2348 LM       |                | 0 - 40 | 2037   | 90%            |
| Luminaire Efficacy | 88 LM/W       |                | 0 - 60 | 2228   | 99%            |
| Maximun Candela    | 4062 CD       |                | 0 - 80 | 2256   | 100%           |

## White Trim (3500K, 98CRI, 42°-Clear, 28W)

### Polar Plot

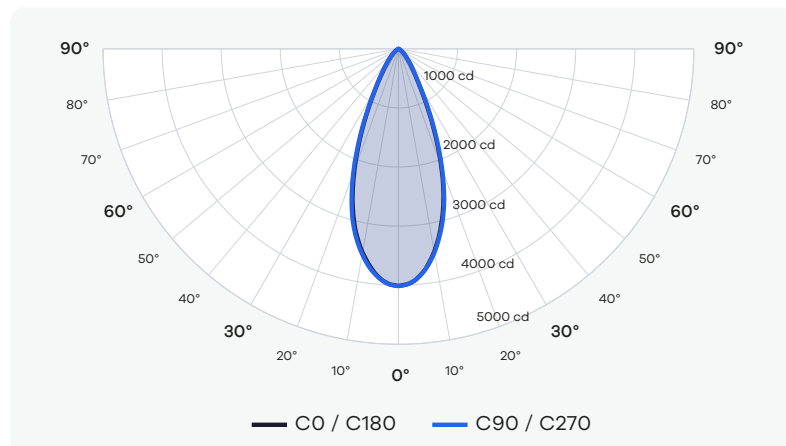

### Cone of Light Tabulation

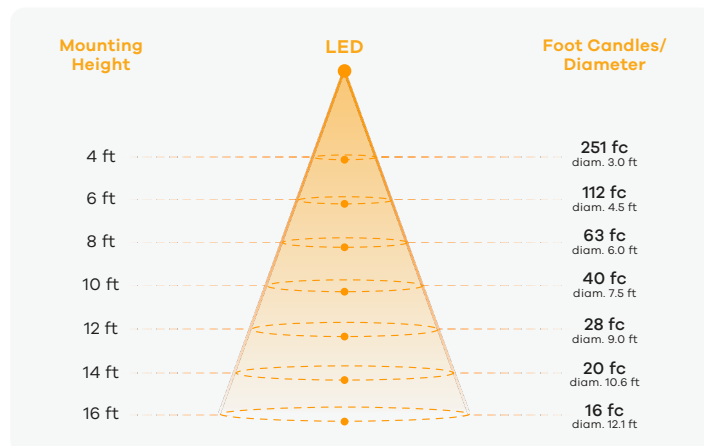

### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.71 V |
| Current      | 0.2305 A |
| Power        | 27.1 W   |
| Power Factor | 0.9817   |

### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.38 | 90 - 270: 0.38 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2321 LM       |                | 0 - 40 | 2014   | 90%            |
| Luminaire Efficacy | 83 LM/W       |                | 0 - 60 | 2202   | 99%            |
| Maximun Candela    | 4014 CD       |                | 0 - 80 | 2229   | 100%           |

## White Trim (2700K, 98CRI, 53°-Clear, 28W)

### Polar Plot

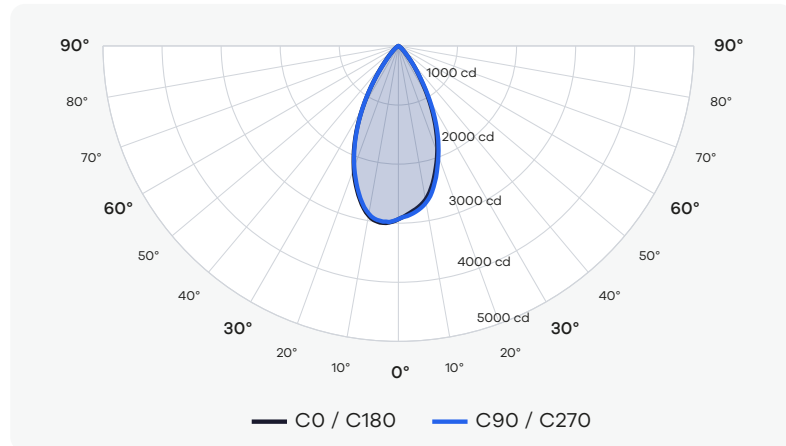

### Cone of Light Tabulation

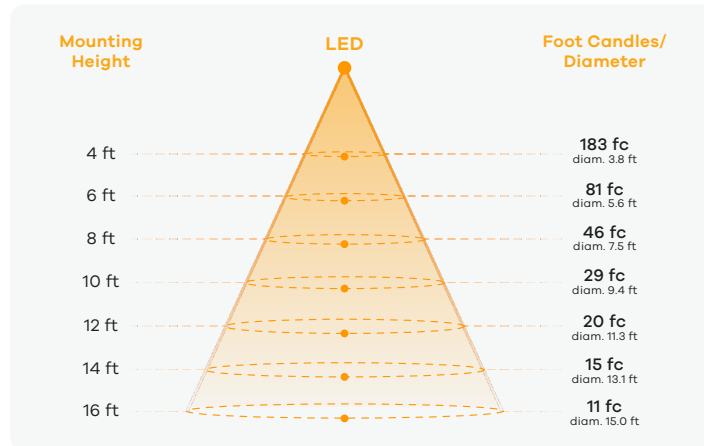

### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.69 V |
| Current      | 0.2299 A |
| Power        | 27.0 W   |
| Power Factor | 0.9815   |

### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.47 | 90 - 270: 0.47 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2356 LM       |                | 0 - 40 | 1957   | 91%            |
| Luminaire Efficacy | 84 LM/W       |                | 0 - 60 | 2133   | 99%            |
| Maximun Candela    | 2932 CD       |                | 0 - 80 | 2155   | 100%           |

## White Trim (3000K, 98CRI, 53°-Clear, 28W)

### Polar Plot

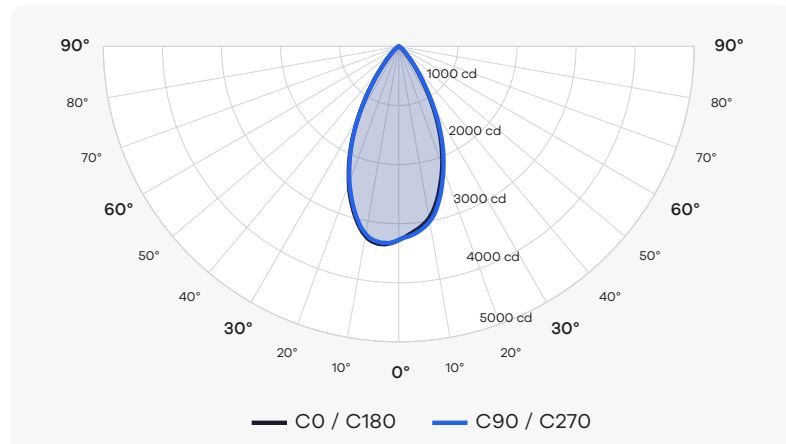

### Cone of Light Tabulation

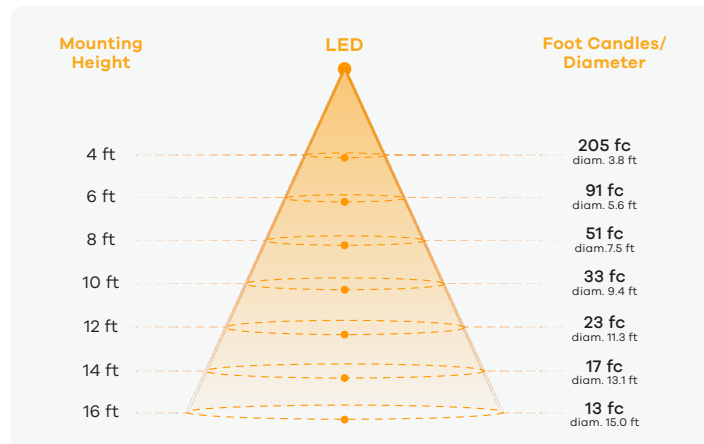

### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.70 V |
| Current      | 0.2337 A |
| Power        | 27.5 W   |
| Power Factor | 0.9821   |

### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.47 | 90 - 270: 0.47 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2633 LM       |                | 0 - 40 | 2187   | 91%            |
| Luminaire Efficacy | 99 LM/W       |                | 0 - 60 | 2384   | 99%            |
| Maximun Candela    | 3277 CD       |                | 0 - 80 | 2408   | 100%           |

### White Trim (3500K, 98CRI, 53°-Clear, 28W)

Polar Plot

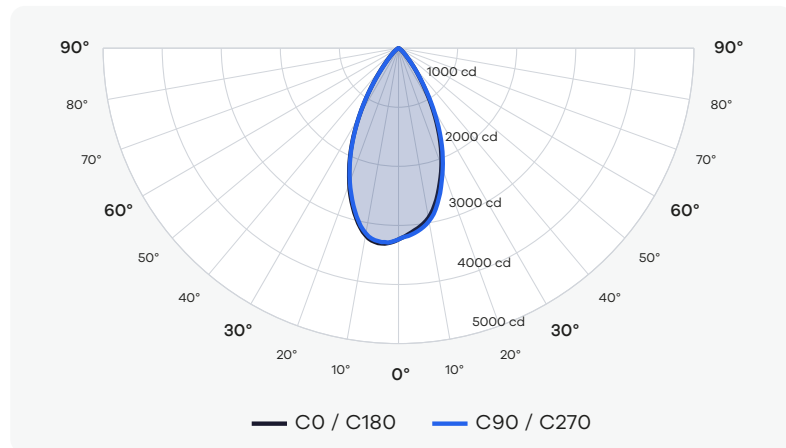

Cone of Light Tabulation

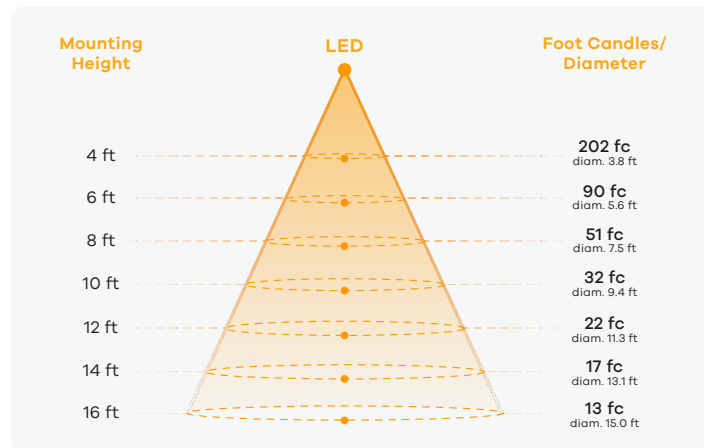

Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.71 V |
| Current      | 0.2302 A |
| Power        | 27.1 W   |
| Power Factor | 0.9817   |

Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.47 | 90 - 270: 0.47 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2601 LM       |                | 0 - 40 | 2161   | 91%            |
| Luminaire Efficacy | 93 LM/W       |                | 0 - 60 | 2355   | 99%            |
| Maximun Candela    | 3237 CD       |                | 0 - 80 | 2379   | 100%           |

### White Trim (2700K, 98CRI, 33°-Silver Reflector, 28W)

Polar Plot

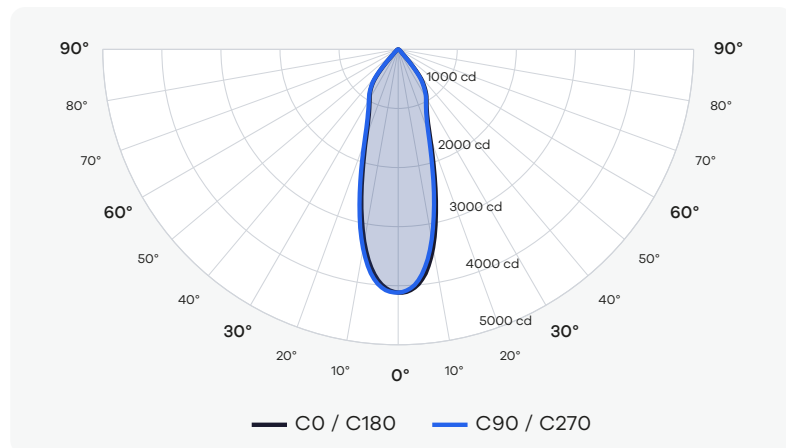

Cone of Light Tabulation

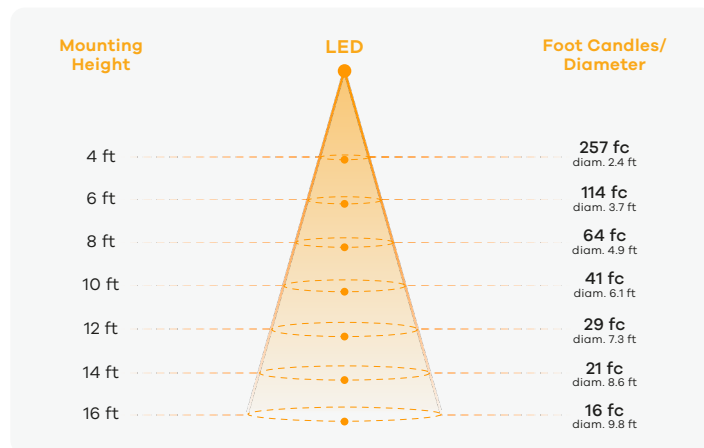

Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.68 V |
| Current      | 0.2297 A |
| Power        | 27.0 W   |
| Power Factor | 0.9815   |

Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.31 | 90 - 270: 0.31 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2311 LM       |                | 0 - 40 | 2043   | 91%            |
| Luminaire Efficacy | 83 LM/W       |                | 0 - 60 | 2212   | 99%            |
| Maximun Candela    | 4116 CD       |                | 0 - 80 | 2241   | 100%           |

### White Trim (3000K, 98CRI, 33°-Silver Reflector, 28W)

#### Polar Plot

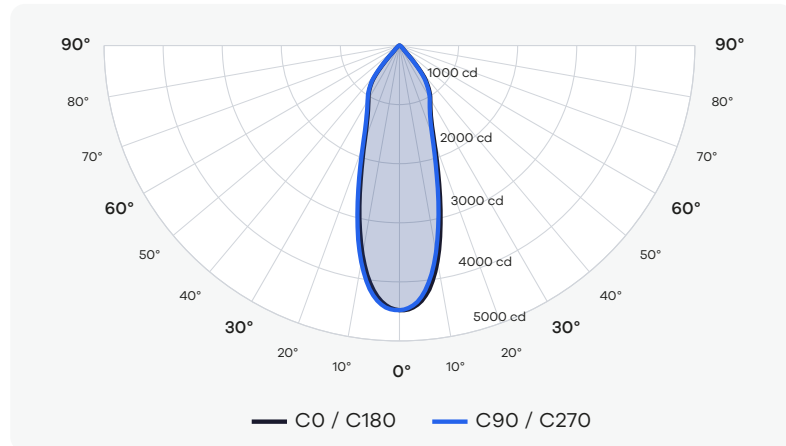

#### Cone of Light Tabulation

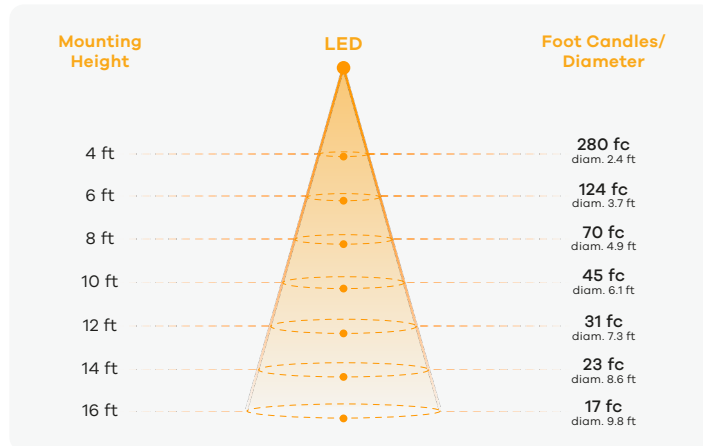

#### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.69 V |
| Current      | 0.2335 A |
| Power        | 27.4 W   |
| Power Factor | 0.9821   |

#### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.31 | 90 - 270: 0.31 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2515 LM       |                | 0 - 40 | 2223   | 91%            |
| Luminaire Efficacy | 94 LM/W       |                | 0 - 60 | 2406   | 99%            |
| Maximun Candela    | 4479 CD       |                | 0 - 80 | 2438   | 100%           |

### White Trim (3500K, 98CRI, 33°-Silver Reflector, 28W)

#### Polar Plot

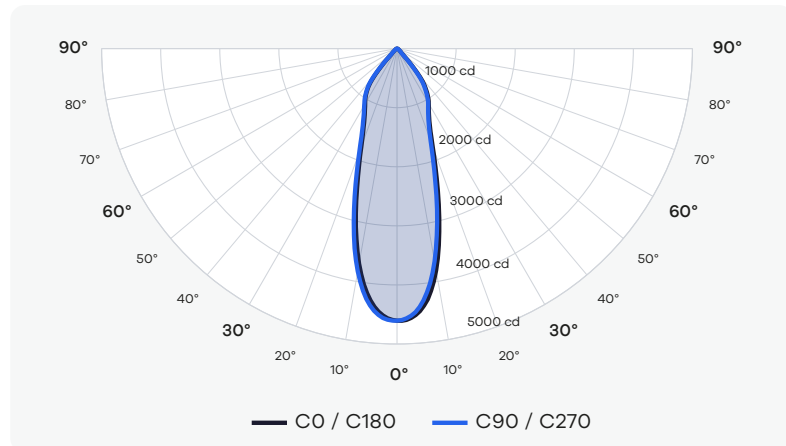

#### Cone of Light Tabulation

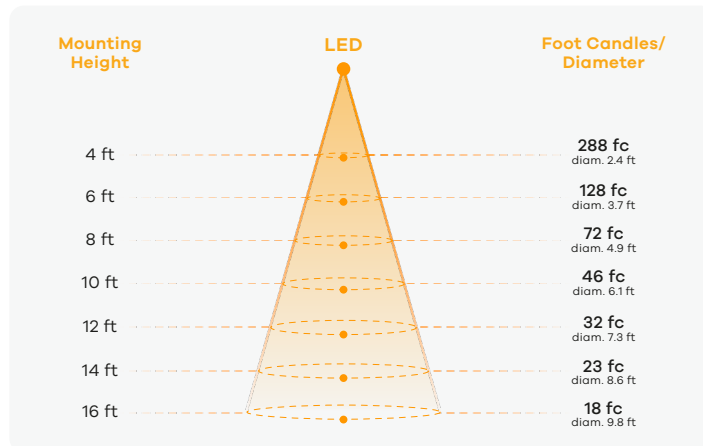

#### Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.71 V |
| Current      | 0.2300 A |
| Power        | 27.0 W   |
| Power Factor | 0.9817   |

#### Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.31 | 90 - 270: 0.31 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2586 LM       |                | 0 - 40 | 2285   | 91%            |
| Luminaire Efficacy | 92 LM/W       |                | 0 - 60 | 2474   | 99%            |
| Maximun Candela    | 4606 CD       |                | 0 - 80 | 2507   | 100%           |

### White Trim (2700K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

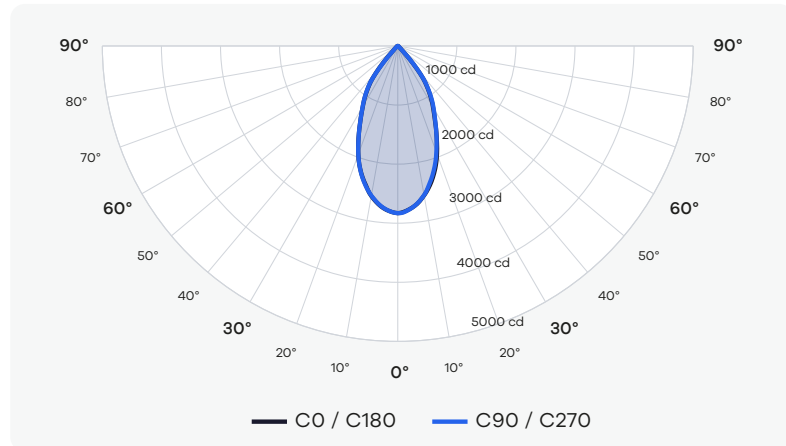

Cone of Light Tabulation

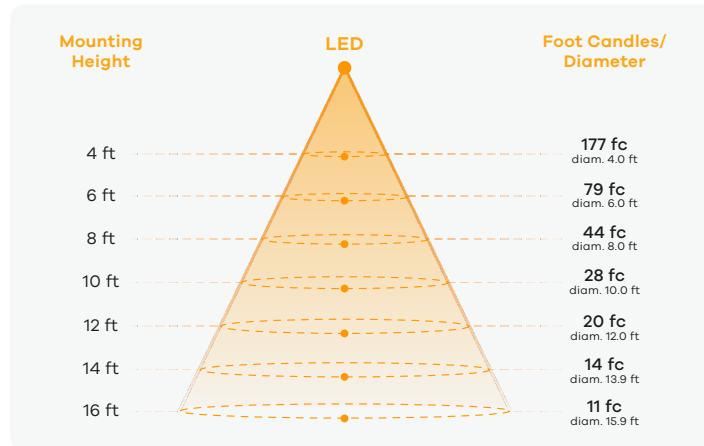

Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.71 V |
| Current      | 0.2334 A |
| Power        | 27.4 W   |
| Power Factor | 0.9821   |

Summary of Results


|                    |              |               |        |        |                |
|--------------------|--------------|---------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.5 | 90 - 270: 0.5 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2396 LM      |               | 0 - 40 | 2143   | 92%            |
| Luminaire Efficacy | 90 LM/W      |               | 0 - 60 | 2296   | 99%            |
| Maximun Candela    | 2830 CD      |               | 0 - 80 | 2318   | 100%           |

### White Trim (3000K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

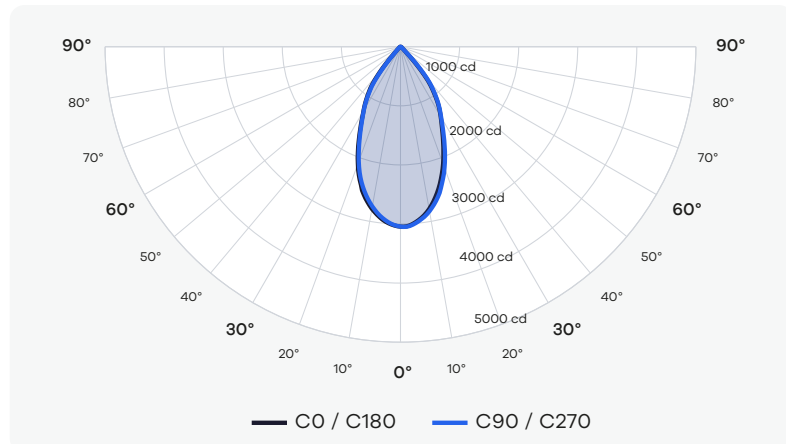

Cone of Light Tabulation

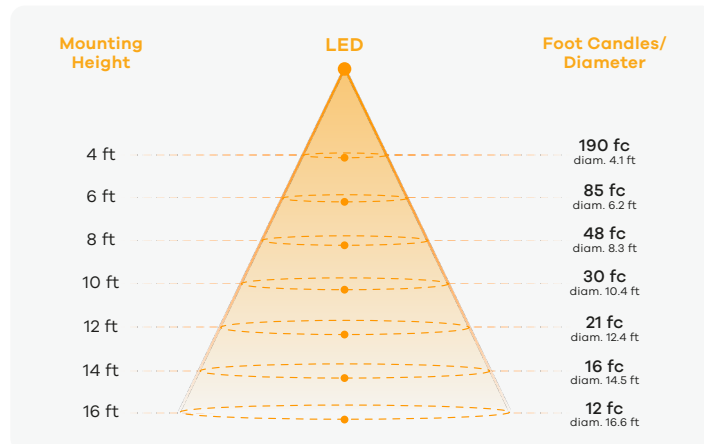

Power Information


|              |          |
|--------------|----------|
| Voltage      | 119.71 V |
| Current      | 0.2334 A |
| Power        | 27.4 W   |
| Power Factor | 0.9821   |

Summary of Results


|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.52 | 90 - 270: 0.52 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2615 LM       |                | 0 - 40 | 2386   | 91%            |
| Luminaire Efficacy | 99 LM/W       |                | 0 - 60 | 2584   | 99%            |
| Maximun Candela    | 3044 CD       |                | 0 - 80 | 2611   | 100%           |

White Trim (3500K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

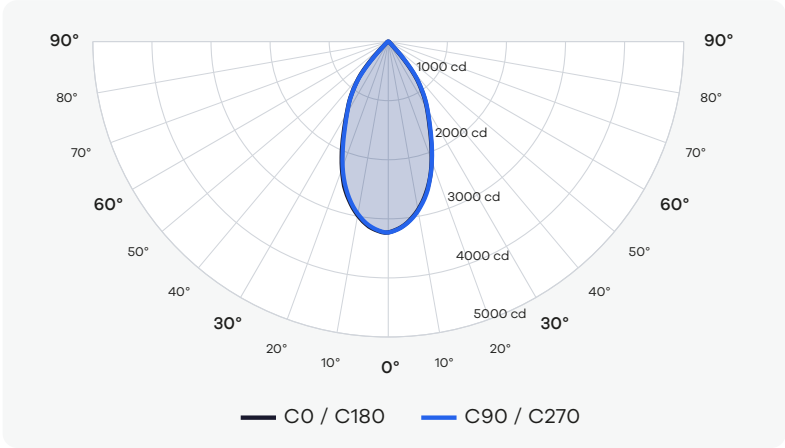

Cone of Light Tabulation

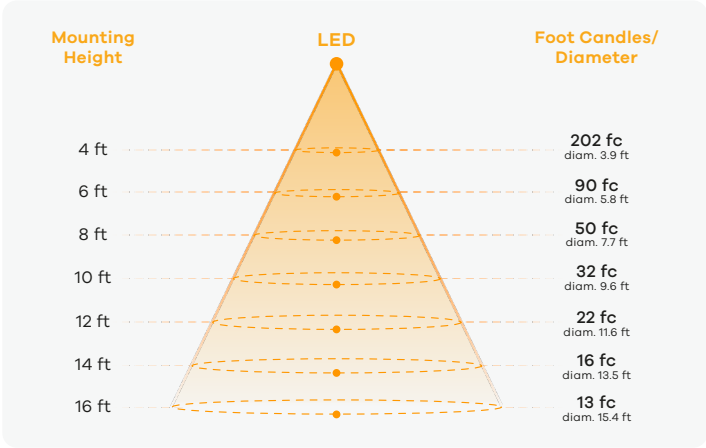

Power Information

|              |          |
|--------------|----------|
| Voltage      | 119.71 V |
| Current      | 0.2334 A |
| Power        | 27.4 W   |
| Power Factor | 0.9821   |

Summary of Results

|                    |               |                |        |        |                |
|--------------------|---------------|----------------|--------|--------|----------------|
| Spacing Criteria   | 0 - 180: 0.48 | 90 - 270: 0.48 | Zone   | Lumens | % of Luminaire |
| Total Lumen Output | 2742 LM       |                | 0 - 40 | 2365   | 92%            |
| Luminaire Efficacy | 103 LM/W      |                | 0 - 60 | 2531   | 99%            |
| Maximun Candela    | 3231 CD       |                | 0 - 80 | 2558   | 100%           |