

ACCRETION SURFACE MOUNT

INSTRUCTIONS



SPECIFICATIONS

Model Number	G-12208	G-12212	G-12216	G-12220	G-12224
Wattage	15W	24W	30W	30W	40W
Voltage	AC120-277V				
Rated Input Frequency (HZ)	50/60Hz				
Beam Angle	120°				
Dimensions	8"X0.95"	12"X0.95"	16"X0.95"	20"X0.95"	24"X0.95"

Important Safety Information



1. Warning: Risk of Shock. House electric current can cause painful shock or serious injury unless handled properly. For your safety, always remember to:

A: turn off the power supply at the fuse or circuit breaker box before you install the fixture.

B: Double-check all connections to be sure they are tight and connect.

2. This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.



3. Warning: Risk of Cuts. Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.





4. Account for small parts and destroy packing material, as these may be hazardous to children.

5. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.

6. Terminal block and the suspending accessories is not included. Installation must be performed by qualified person.

Surface Mounted Installation

1. Turn off the switch. Screw the bracket to the junction box ceiling.
2. Connect the lamp body wires with power cord.
3. Push the lamp towards the ceiling
4. Turn the lamp to lock it in place securely. Restore power and test to ensure the lamp is functioning properly.

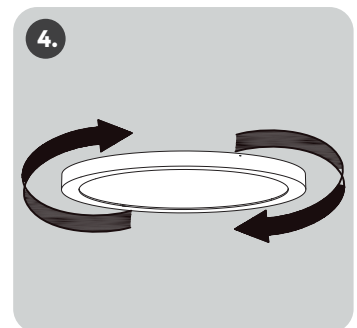

Caution

1. Warning: Risk of fire.
2. Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electrical wiring experience, please refer to do-it-yourself wiring handbook or have your fixture installed by qualified by a qualified licensed electrician. All electrical connections must be in accordance with local standards. Reliable operating temperature is -20 to +40 degrees.
3. Please obey fire prevention regulations, do not cover the fixture with any heat insulated materials.
4. Do not change the LED light source or driver inside under any circumstance.



Dimmable:
For use with
dimmers



Warranty:
5 years



This product
is for indoor
use only.