

Aster 5"

Interchangeable Shallow Module

Product Information

Description	M5/18W/LED/5CCT
Color temp	27, 30, 35, 41, 50k + 5DTW
Output lumens	1800
Beam angle	60°
Input volts	120-277V
Wattage	18W
CRI	90>
mA	420mA
Output volts	33-38V
IC rated	Yes
Dimmable	Triac or 0-10v
Dim to warm	See table page 2
Plenum rated	FT6
Packed	18

G-22505

Selectable Color

5CCT+DTW Dim to Warm



[See other Modules options](#)

Trim Options



[Round/Square Trims](#)

[Shallow Trims](#)

[Ultra Shallow Trims](#)

[Round Trimless](#)

[Square Trimless](#)




5CCT & Multi Dim to Warm Colors


Set to	2700K	3000K	3500K	4000K	5000K
At CCT setting	2700 Kelvin	3000 Kelvin	3500 Kelvin	4000 Kelvin	5000 Kelvin
At Dim to warm setting	2500K - 1800K	2700K - 1800K	3000K - 1800K	3500K - 1800K	4000K - 1800K

Lens Options


Clear Lens



G-21630
L5/15-DEGREE



G-21631
L5/24-DEGREE



G-21632
L5/40-DEGREE

Frosted Lens



G-22570
5/FROSTED LENS/50°

Diffuser



G-22579
5/HC/HEX/LOUVR

Lens Covers



G-22580
5/PRISMATIC COVER



G-22581
5/SOLITE COVER



G-22582
5/BEAMSPLIT LENS

Accessories




Emergency LED Driver
25W G-95525
30W G-48411
60W G-95521



Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Driver Dimensions

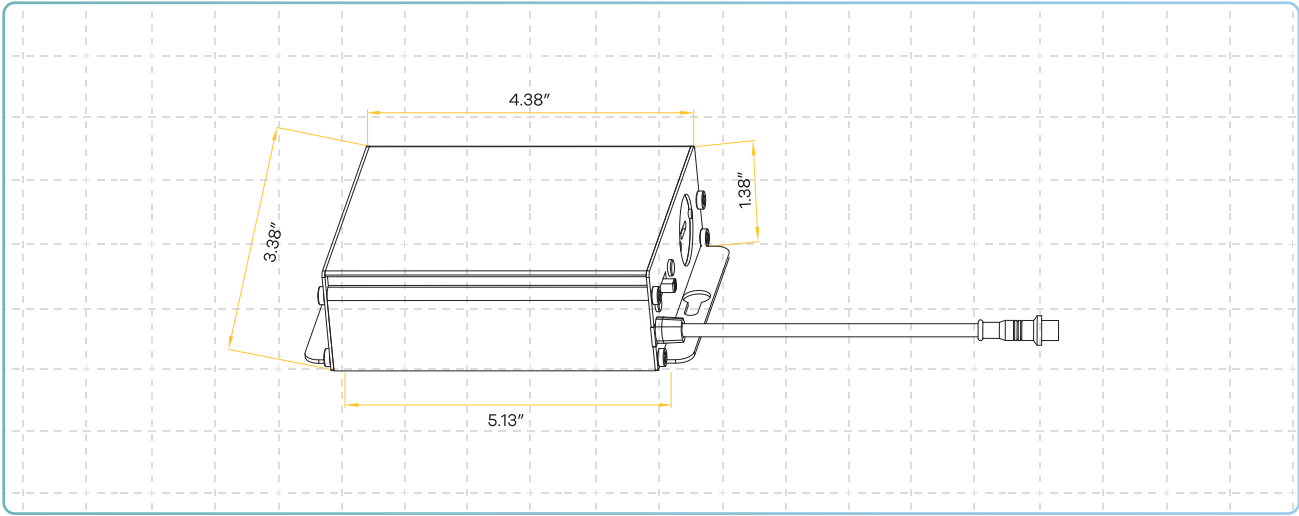

Dimmer List

Brand	Series	Model	Load	Brand	Series	Model	Load
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W			6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	1064	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W