



White Narrow Trim (2700K, 98CRI, 35°-Clear, 28W)

Polar Plot

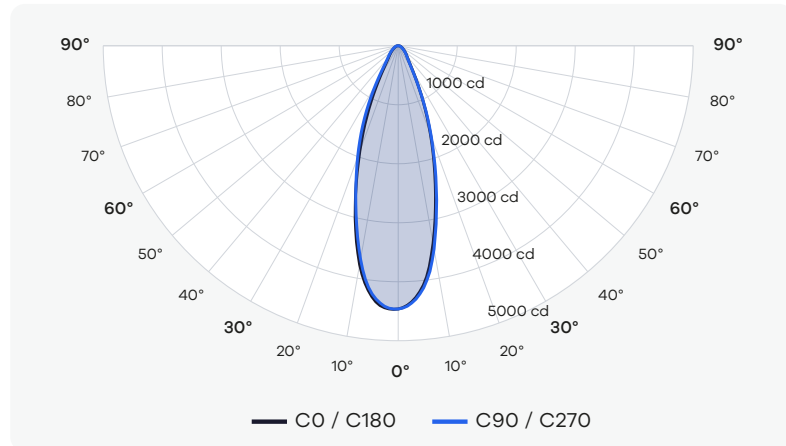

Cone of Light Tabulation

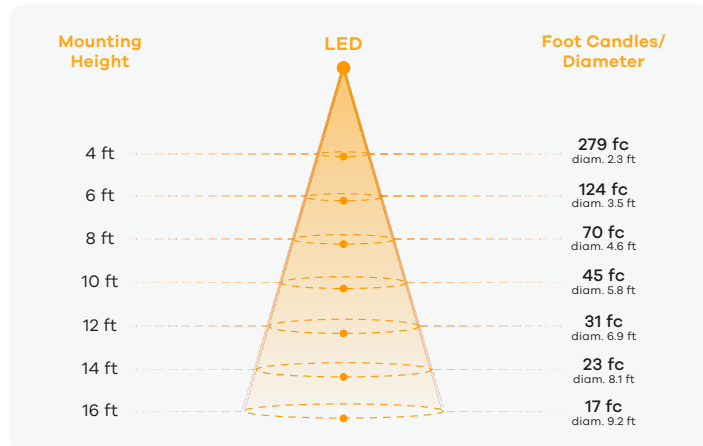

Power Information


Voltage	119.67 V
Current	0.2306 A
Power	27.1 W
Power Factor	0.9816

Summary of Results


Spacing Criteria	0 - 180: 0.29	90 - 270: 0.29	Zone	Lumens	% of Luminaire
Total Lumen Output	2220 LM		0 - 40	1679	82%
Luminaire Efficacy	79 LM/W		0 - 60	1916	94%
Maximun Candela	4462 CD		0 - 80	2024	99%

White Narrow Trim (3000K, 98CRI, 35°-Clear, 28W)

Polar Plot

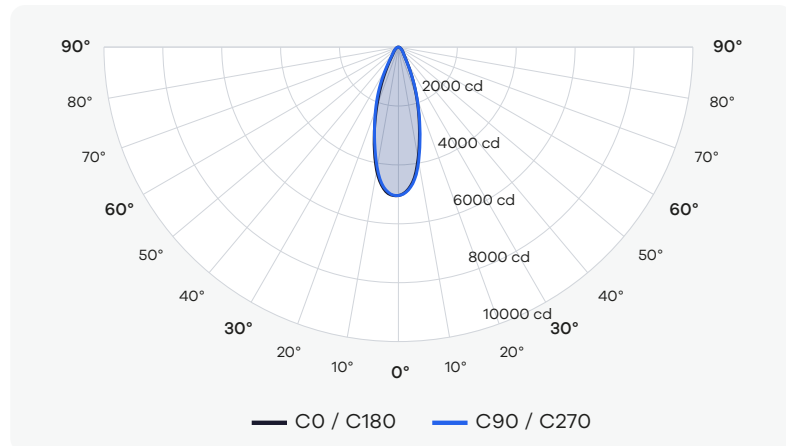

Cone of Light Tabulation

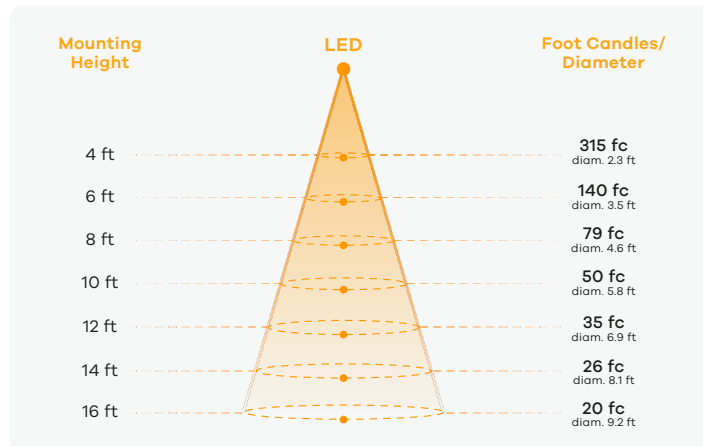

Power Information


Voltage	119.68 V
Current	0.2344 A
Power	27.6 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.29	90 - 270: 0.29	Zone	Lumens	% of Luminaire
Total Lumen Output	2508 LM		0 - 40	1897	82%
Luminaire Efficacy	94 LM/W		0 - 60	2165	94%
Maximun Candela	5042 CD		0 - 80	2287	99%

White Narrow Trim (3500K, 98CRI, 35°-Clear, 28W)

Polar Plot

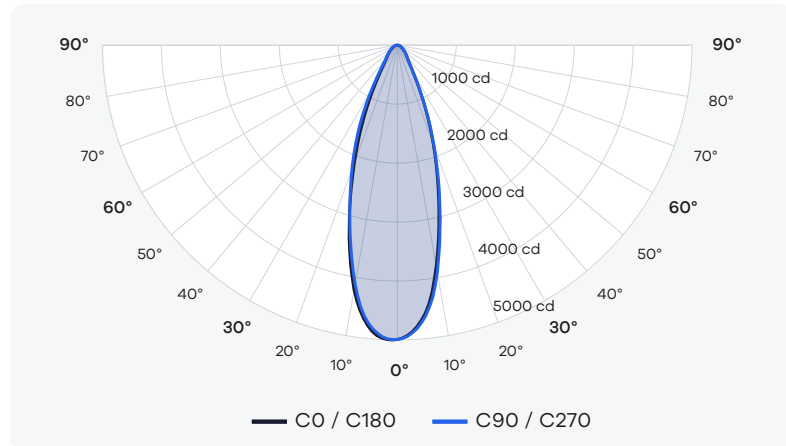

Cone of Light Tabulation

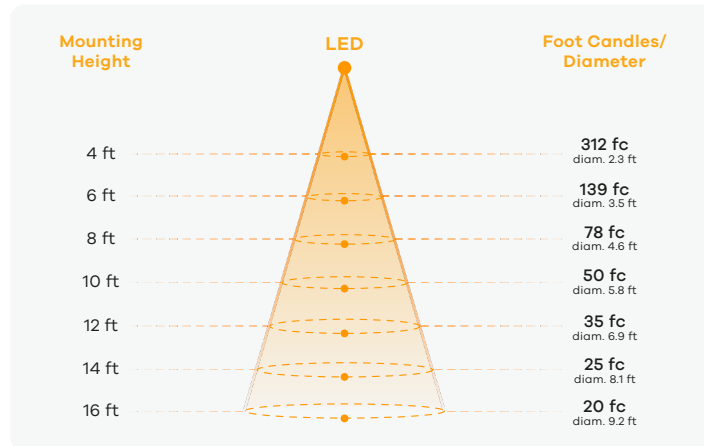

Power Information


Voltage	119.71 V
Current	0.2307 A
Power	27.1 W
Power Factor	0.9818

Summary of Results


Spacing Criteria	0 - 180: 0.29	90 - 270: 0.29	Zone	Lumens	% of Luminaire
Total Lumen Output	2484 LM		0 - 40	1879	82%
Luminaire Efficacy	89 LM/W		0 - 60	2144	94%
Maximun Candela	4992 CD		0 - 80	2264	99%

White Narrow Trim (2700K, 98CRI, 42°-Clear, 28W)

Polar Plot

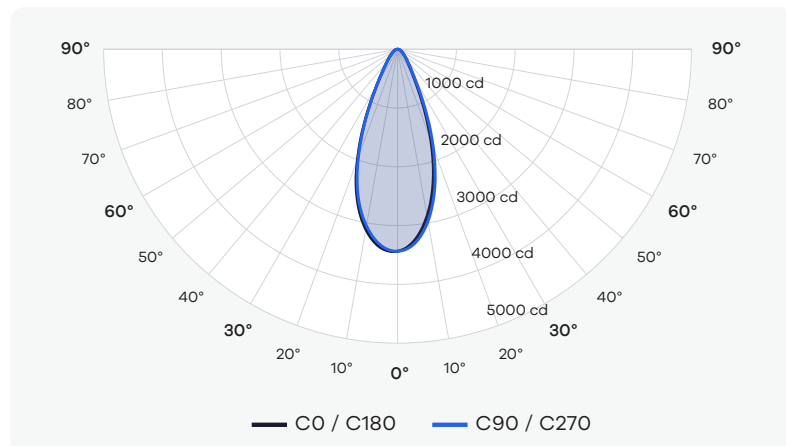

Cone of Light Tabulation

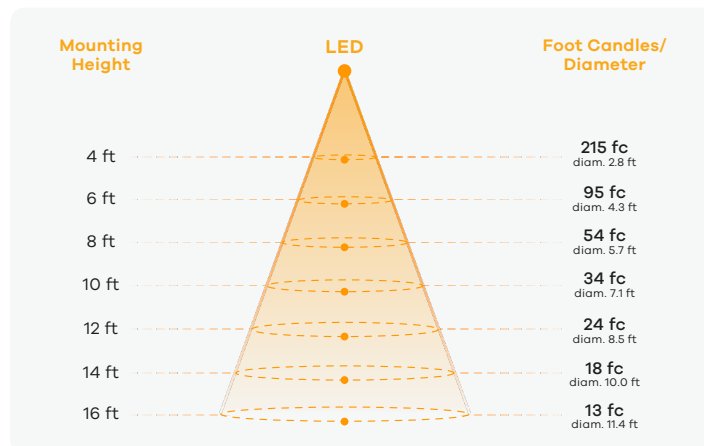

Power Information


Voltage	119.70 V
Current	0.2301 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	2141 LM		0 - 40	1624	83%
Luminaire Efficacy	76 LM/W		0 - 60	1854	95%
Maximun Candela	3437 CD		0 - 80	1952	100%

White Narrow Trim (3000K, 98CRI, 42°-Clear, 28W)

Polar Plot

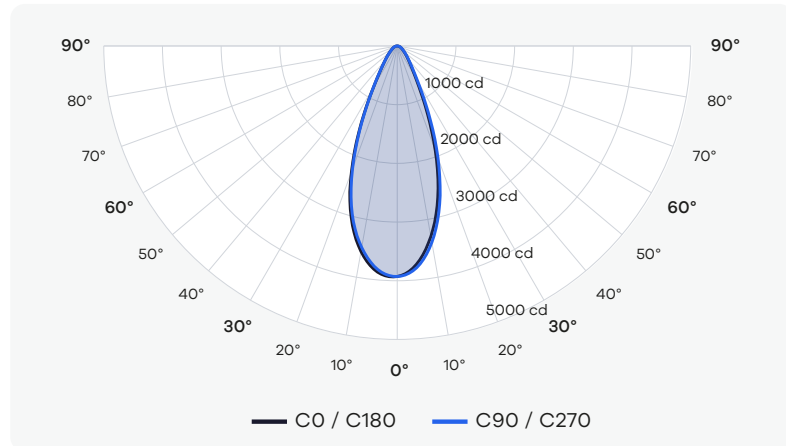

Cone of Light Tabulation

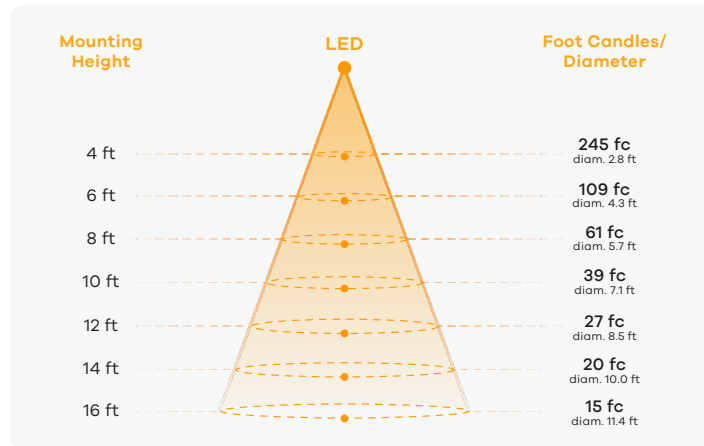

Power Information


Voltage	119.69 V
Current	0.2339 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	2447 LM		0 - 40	1856	83%
Luminaire Efficacy	92 LM/W		0 - 60	2119	95%
Maximum Candela	3928 CD		0 - 80	2230	100%

White Narrow Trim (3500K, 98CRI, 42°-Clear, 28W)

Polar Plot

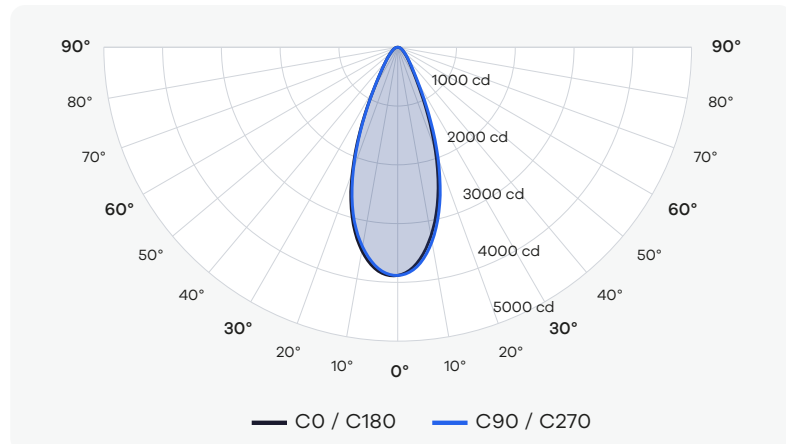

Cone of Light Tabulation

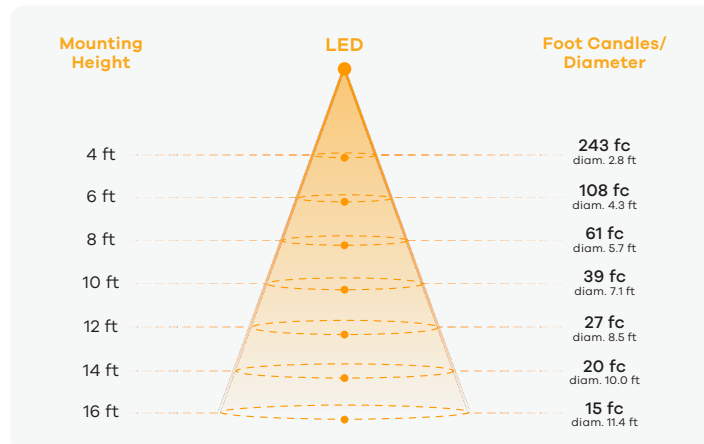

Power Information


Voltage	119.71 V
Current	0.2305 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.36	90 - 270: 0.36	Zone	Lumens	% of Luminaire
Total Lumen Output	2418 LM		0 - 40	1835	83%
Luminaire Efficacy	86 LM/W		0 - 60	2094	95%
Maximum Candela	3882 CD		0 - 80	2204	100%

White Narrow Trim (2700K, 98CRI, 53°-Clear, 28W)

Polar Plot

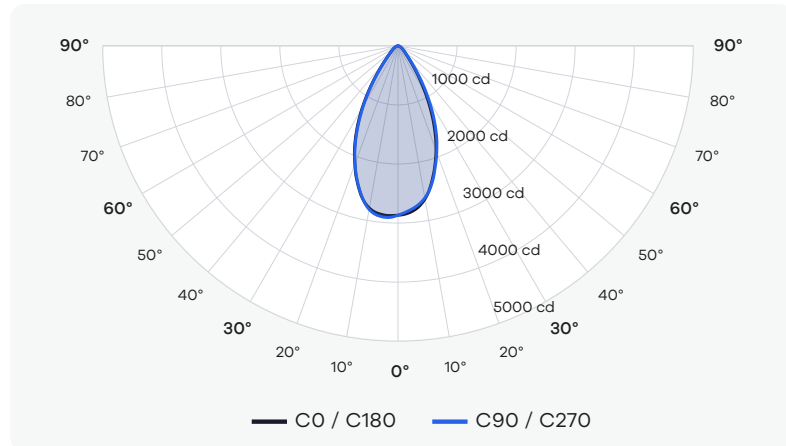

Cone of Light Tabulation

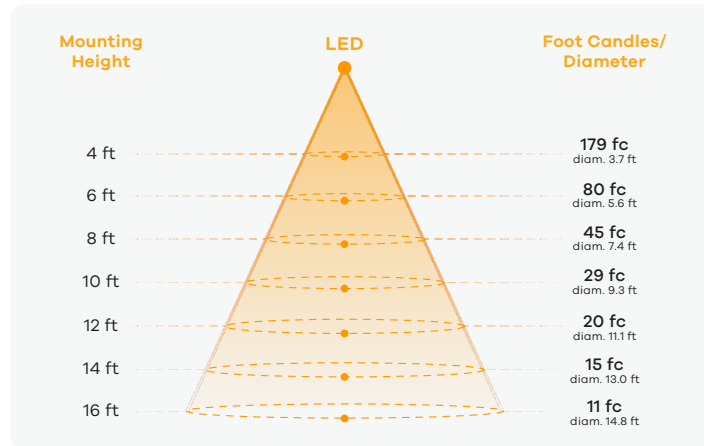

Power Information


Voltage	119.69 V
Current	0.2299 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	2417 LM		0 - 40	1889	86%
Luminaire Efficacy	86 LM/W		0 - 60	2122	96%
Maximun Candela	2868 CD		0 - 80	2195	100%

White Narrow Trim (3000K, 98CRI, 53°-Clear, 28W)

Polar Plot

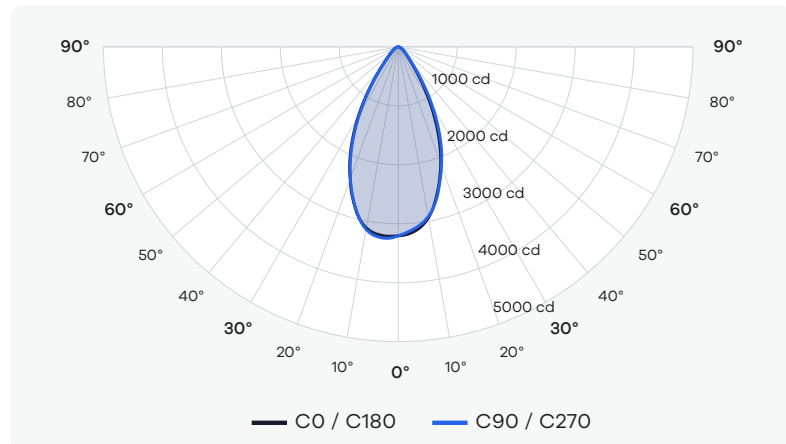

Cone of Light Tabulation

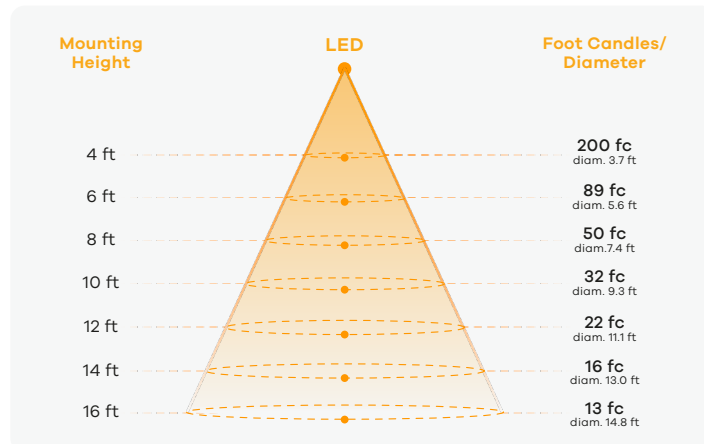

Power Information


Voltage	119.70 V
Current	0.2337 A
Power	27.5 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	2701 LM		0 - 40	2111	86%
Luminaire Efficacy	102 LM/W		0 - 60	2372	96%
Maximun Candela	3205 CD		0 - 80	2453	100%

White Narrow Trim (3500K, 98CRI, 53°-Clear, 28W)

Polar Plot

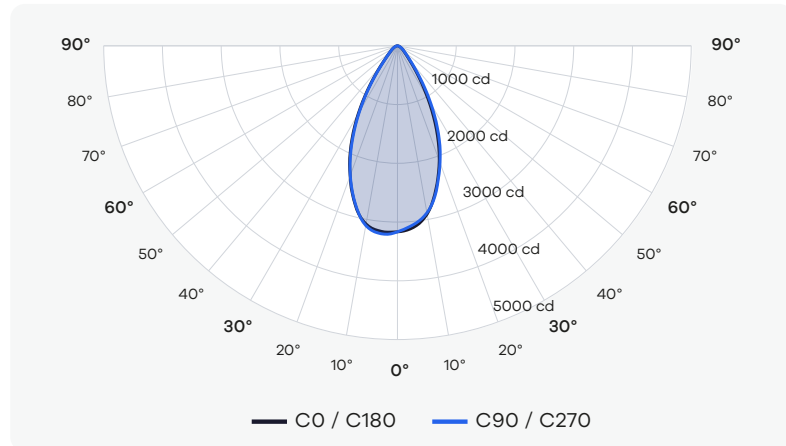

Cone of Light Tabulation

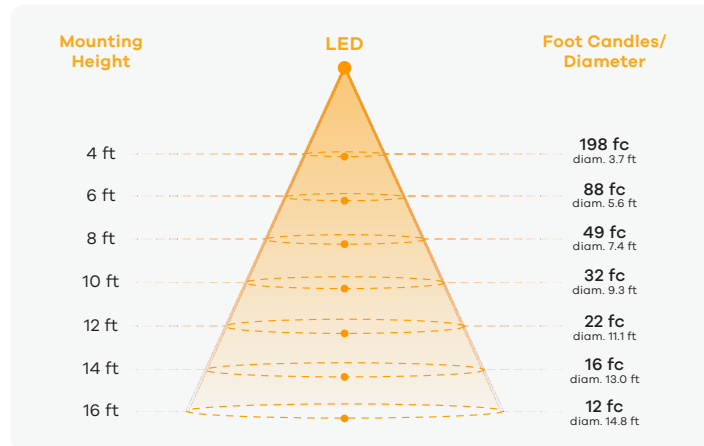

Power Information


Voltage	119.71 V
Current	0.2302 A
Power	27.1 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.46	90 - 270: 0.46	Zone	Lumens	% of Luminaire
Total Lumen Output	2668 LM		0 - 40	2086	86%
Luminaire Efficacy	95 LM/W		0 - 60	2343	96%
Maximun Candela	3166 CD		0 - 80	2423	100%

White Narrow Trim (2700K, 98CRI, 33°-Silver Reflector, 28W)

Polar Plot

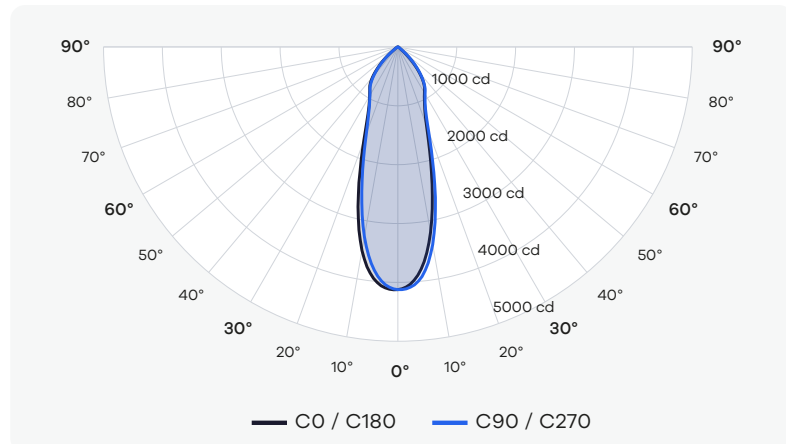

Cone of Light Tabulation

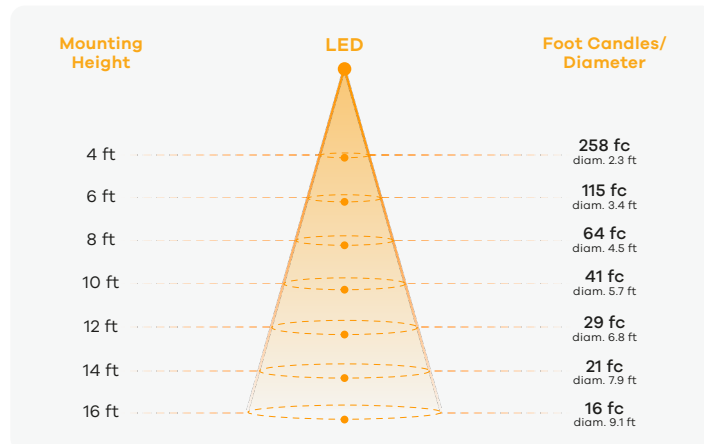

Power Information


Voltage	119.68 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	2431 LM		0 - 40	1932	85%
Luminaire Efficacy	87 LM/W		0 - 60	2233	99%
Maximun Candela	4123 CD		0 - 80	2255	100%

White Narrow Trim (3000K, 98CRI, 33°-Silver Reflector, 28W)

Polar Plot

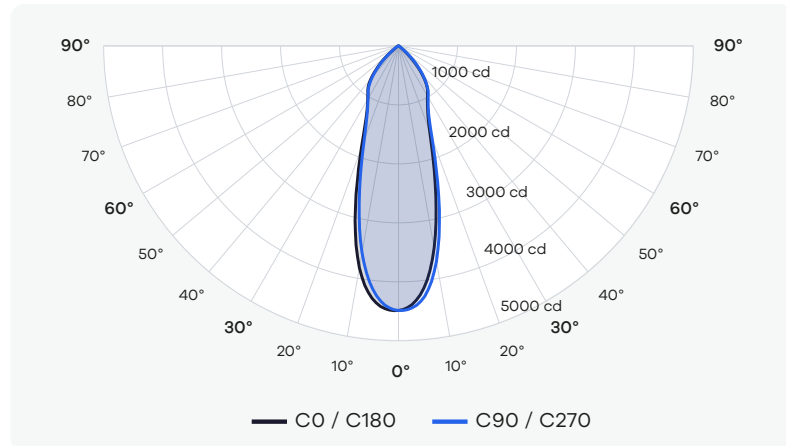

Cone of Light Tabulation

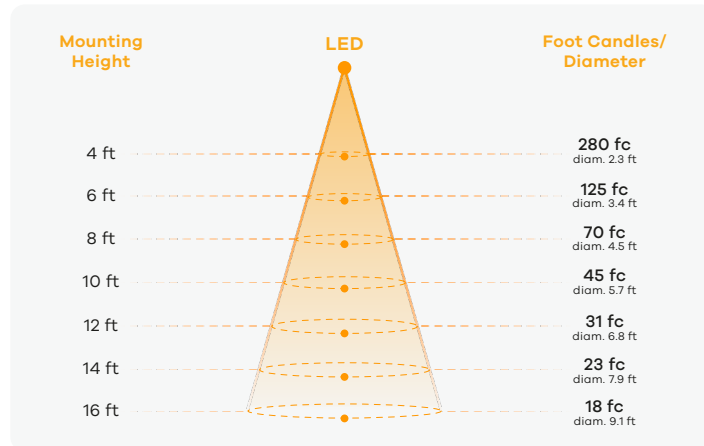

Power Information


Voltage	119.69 V
Current	0.2335 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	2645 LM		0 - 40	2103	85%
Luminaire Efficacy	100 LM/W		0 - 60	2430	99%
Maximun Candela	4486 CD		0 - 80	2454	100%

White Narrow Trim (3500K, 98CRI, 33°-Silver Reflector, 28W)

Polar Plot

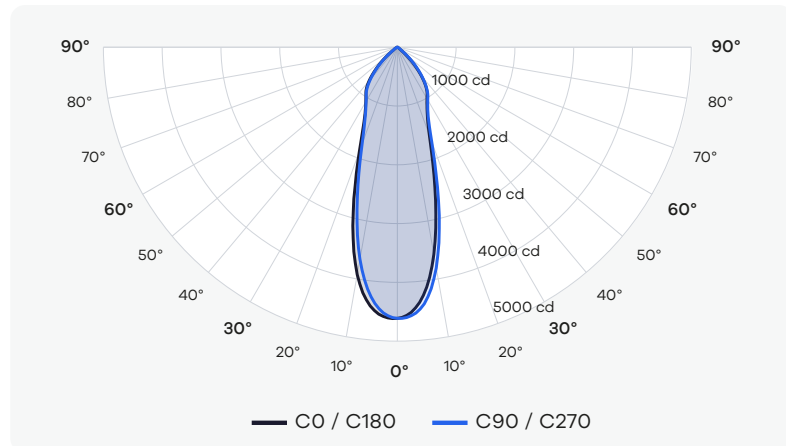

Cone of Light Tabulation

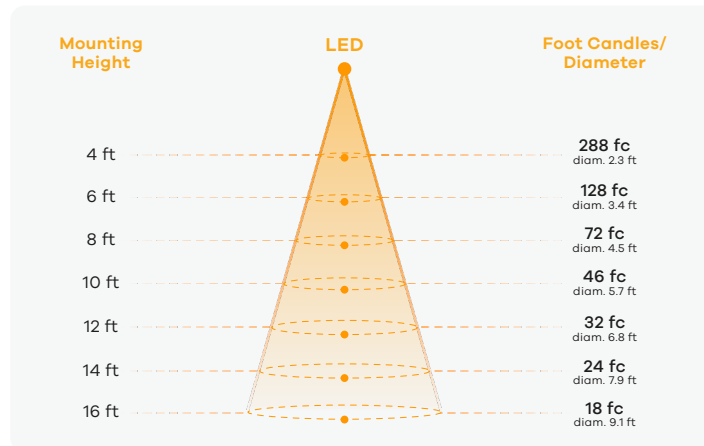

Power Information


Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

Summary of Results


Spacing Criteria	0 - 180: 0.28	90 - 270: 0.28	Zone	Lumens	% of Luminaire
Total Lumen Output	2720 LM		0 - 40	2162	85%
Luminaire Efficacy	97 LM/W		0 - 60	2499	99%
Maximun Candela	4613 CD		0 - 80	2523	100%

White Narrow Trim (2700K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

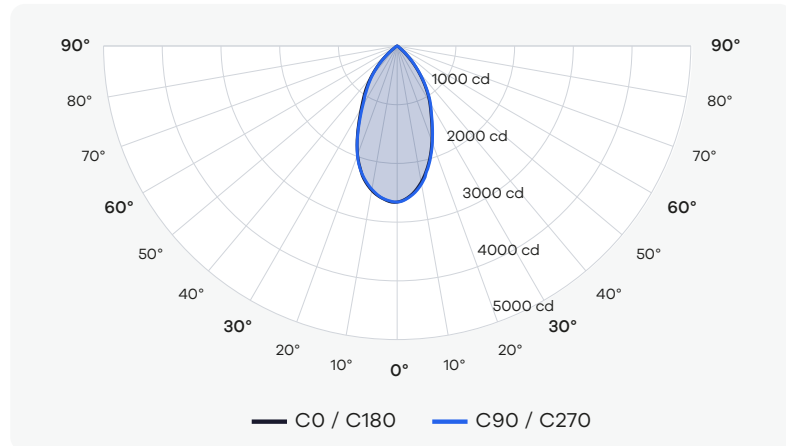

Cone of Light Tabulation

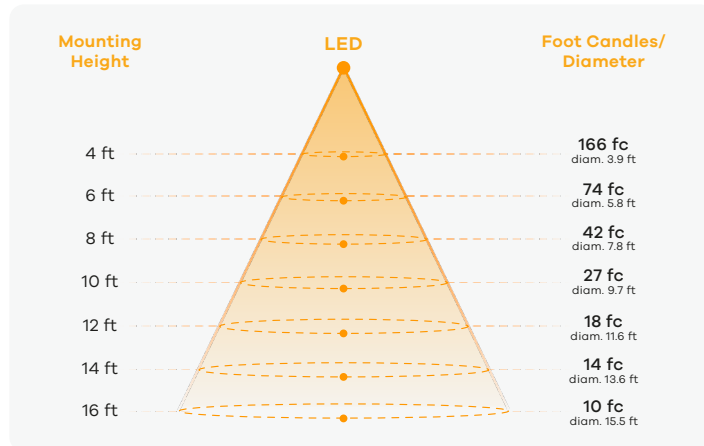

Power Information


Voltage	119.70 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2443 LM		0 - 40	1964	87%
Luminaire Efficacy	87 LM/W		0 - 60	2243	99%
Maximun Candela	2659 CD		0 - 80	2258	100%

White Narrow Trim (3000K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

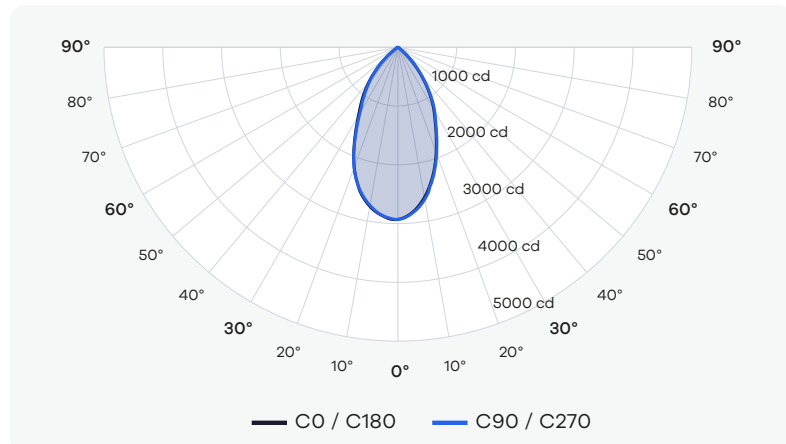

Cone of Light Tabulation

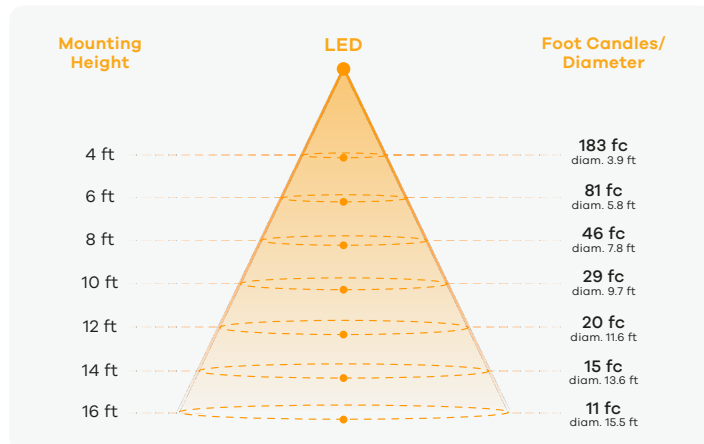

Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2691 LM		0 - 40	2164	87%
Luminaire Efficacy	102 LM/W		0 - 60	2471	99%
Maximun Candela	2929 CD		0 - 80	2487	100%

White Narrow Trim (3500K, 98CRI, 54°-Silver Reflector, 28W)

Polar Plot

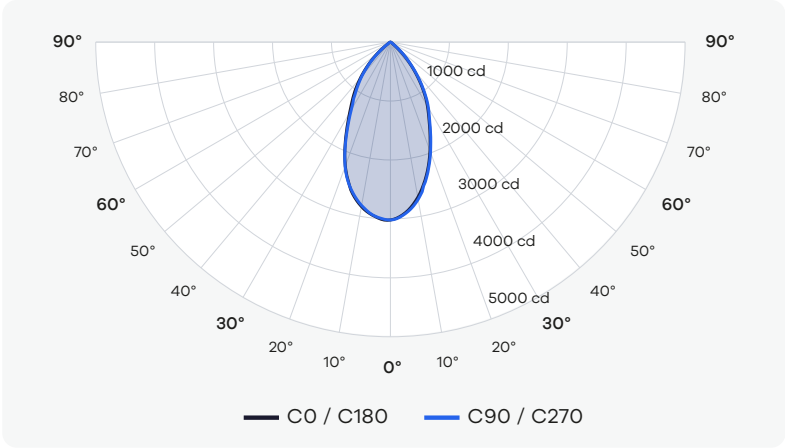

Cone of Light Tabulation

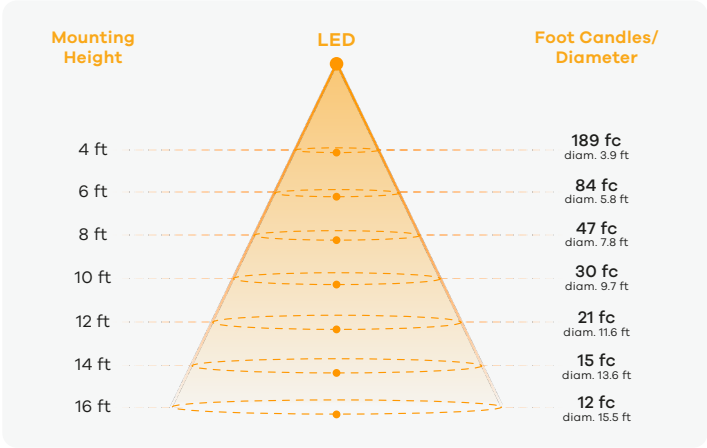

Power Information

Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

Summary of Results

Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2773 LM		0 - 40	2230	87%
Luminaire Efficacy	99 LM/W		0 - 60	2547	99%
Maximun Candela	3018 CD		0 - 80	2563	100%