



## White Narrow Trim (2700K, 98CRI, 35°-Clear, 15W)

Polar Plot

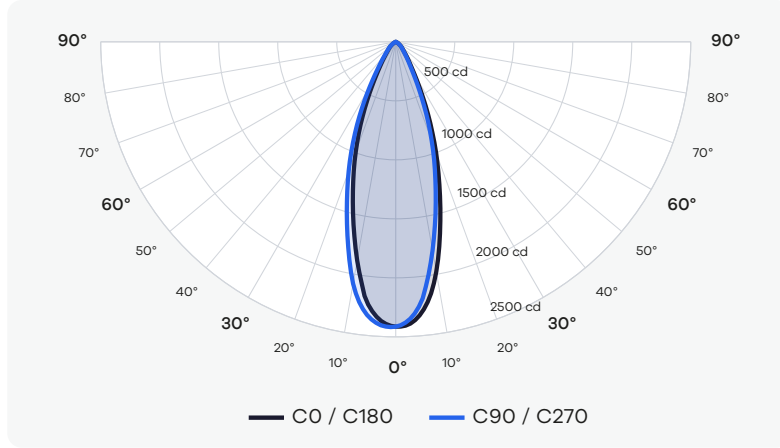

Cone of Light Tabulation

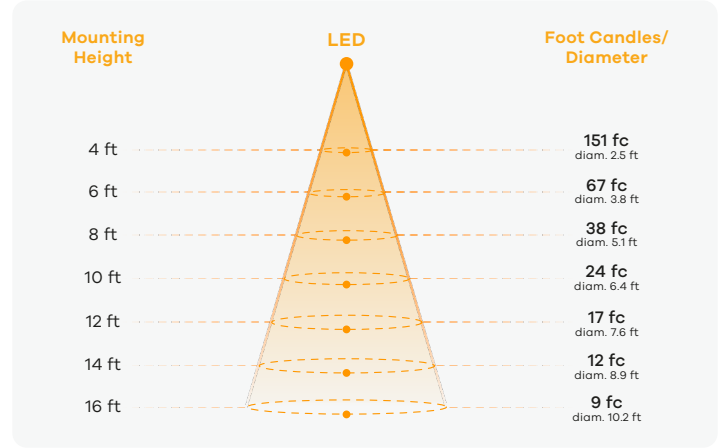

### Power Information


Voltage	119.73 V
Current	0.1164 A
Power	13.6 W
Power Factor	0.9781

### Summary of Results


Spacing Criteria	0 - 180: 0.32	90 - 270: 0.32	Zone	Lumens	% of Luminaire
Total Lumen Output	1148 LM		0 - 40	1009	90%
Luminaire Efficacy	77 LM/W		0 - 60	1105	99%
Maximun Candela	2414 CD		0 - 80	1119	100%

## White Narrow Trim (3000K, 98CRI, 35°-Clear, 15W)

Polar Plot

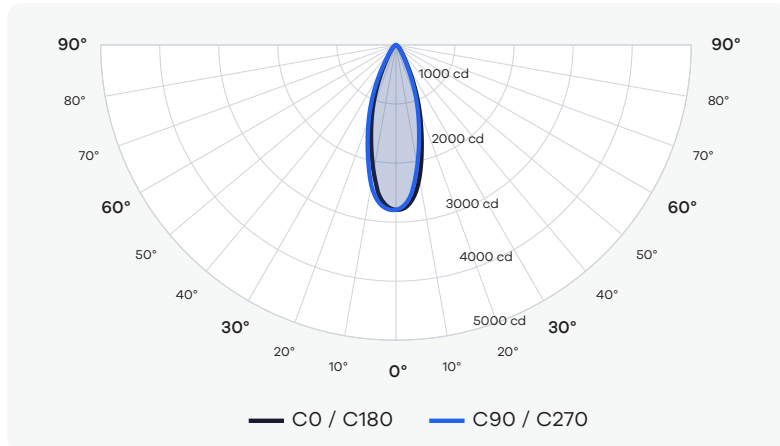

Cone of Light Tabulation

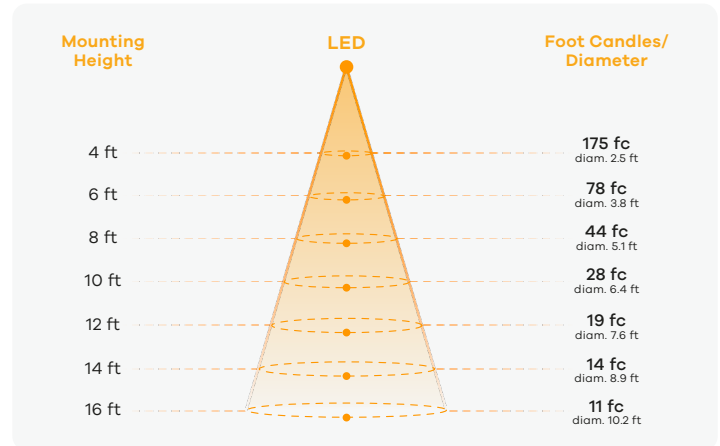

### Power Information


Voltage	119.78 V
Current	0.1175 A
Power	13.8 W
Power Factor	0.9785

### Summary of Results


Spacing Criteria	0 - 180: 0.32	90 - 270: 0.32	Zone	Lumens	% of Luminaire
Total Lumen Output	1328 LM		0 - 40	1168	90%
Luminaire Efficacy	99 LM/W		0 - 60	1278	99%
Maximun Candela	2792 CD		0 - 80	1295	100%

## White Narrow Trim (3500K, 98CRI, 35°-Clear, 15W)

Polar Plot

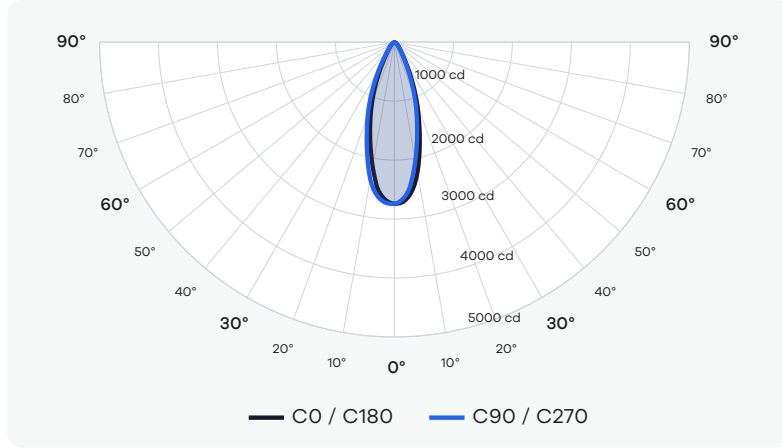

Cone of Light Tabulation

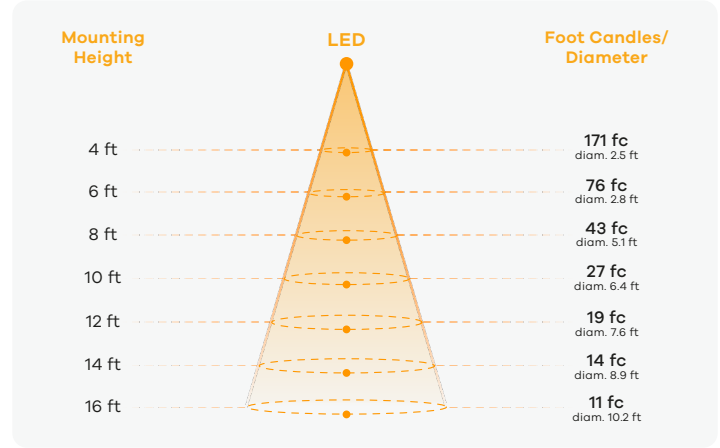

### Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

### Summary of Results


Spacing Criteria	0 - 180: 0.32	90 - 270: 0.32	Zone	Lumens	% of Luminaire
Total Lumen Output	1304 LM		0 - 40	1146	90%
Luminaire Efficacy	87 LM/W		0 - 60	1254	99%
Maximun Candela	2740 CD		0 - 80	1271	100%

## White Narrow Trim (2700K, 98CRI, 42°-Clear, 15W)

Polar Plot

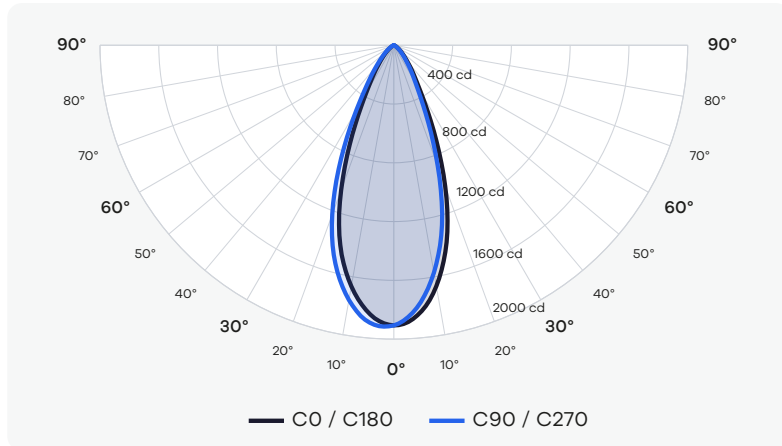

Cone of Light Tabulation

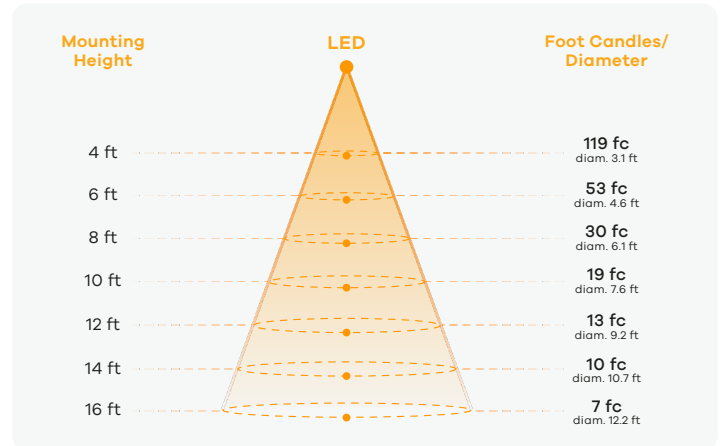

### Power Information


Voltage	119.71 V
Current	0.1166 A
Power	13.7 W
Power Factor	0.9781

### Summary of Results


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1149 LM		0 - 40	987	89%
Luminaire Efficacy	77 LM/W		0 - 60	1090	99%
Maximun Candela	1907 CD		0 - 80	1104	100%

### White Narrow Trim (3000K, 98CRI, 42°-Clear, 15W)

Polar Plot

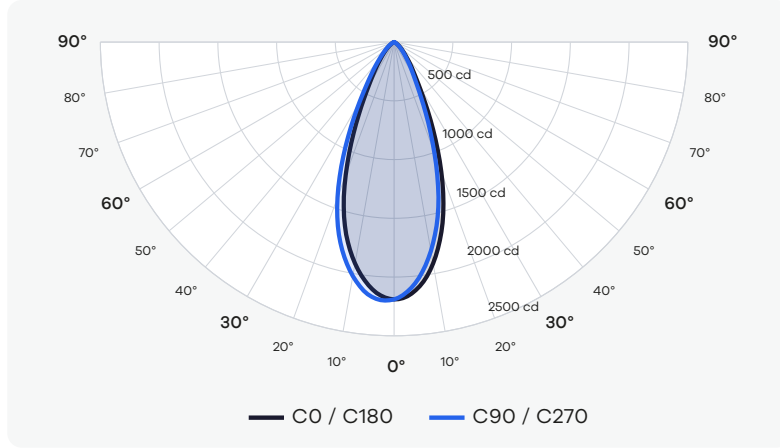

Cone of Light Tabulation

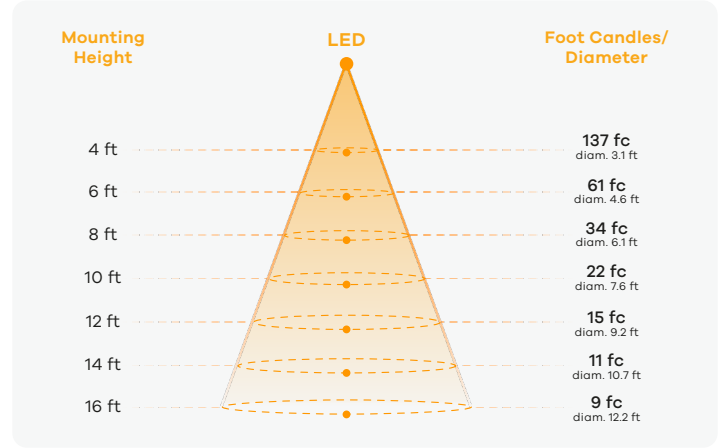

**Power Information**


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

**Summary of Results**


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1320 LM		0 - 40	1134	89%
Luminaire Efficacy	99 LM/W		0 - 60	1252	99%
Maximun Candela	2190 CD		0 - 80	1268	100%

### White Narrow Trim (3500K, 98CRI, 42°-Clear, 15W)

Polar Plot

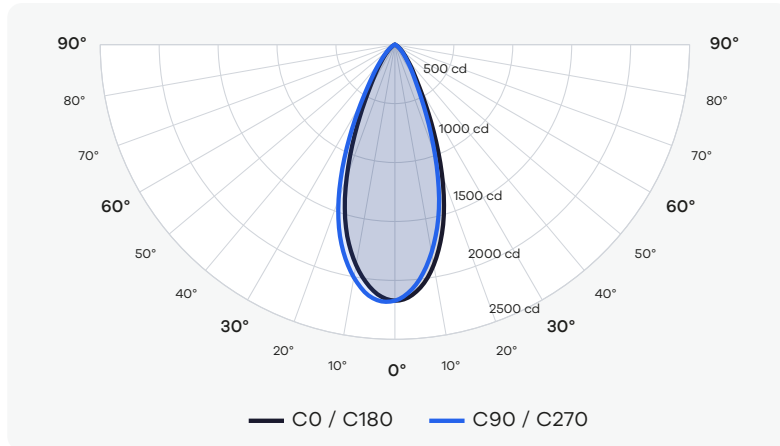

Cone of Light Tabulation

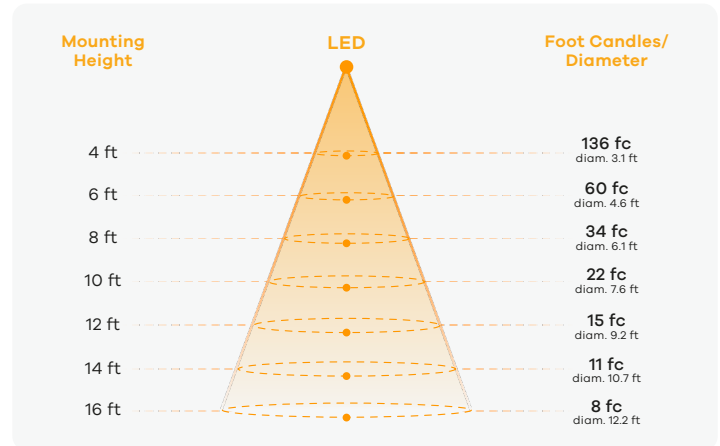

**Power Information**


Voltage	119.80 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

**Summary of Results**


Spacing Criteria	0 - 180: 0.38	90 - 270: 0.38	Zone	Lumens	% of Luminaire
Total Lumen Output	1309 LM		0 - 40	1125	89%
Luminaire Efficacy	87 LM/W		0 - 60	1242	99%
Maximun Candela	2172 CD		0 - 80	1258	100%

## White Narrow Trim (2700K, 98CRI, 53°-Clear, 15W)

Polar Plot

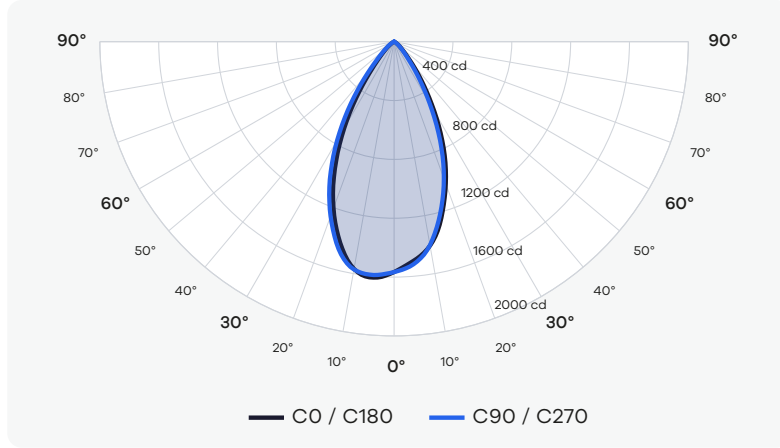

Cone of Light Tabulation

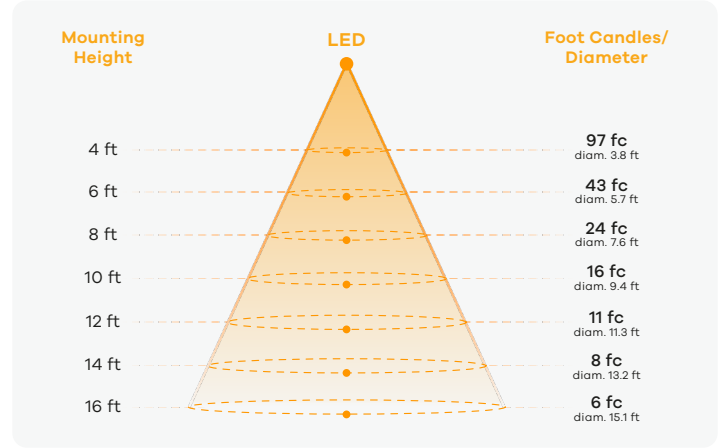

### Power Information


Voltage	119.71 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

### Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1301 LM		0 - 40	1053	90%
Luminaire Efficacy	87 LM/W		0 - 60	1153	99%
Maximum Candela	1566 CD		0 - 80	1165	100%

## White Narrow Trim (3000K, 98CRI, 53°-Clear, 15W)

Polar Plot

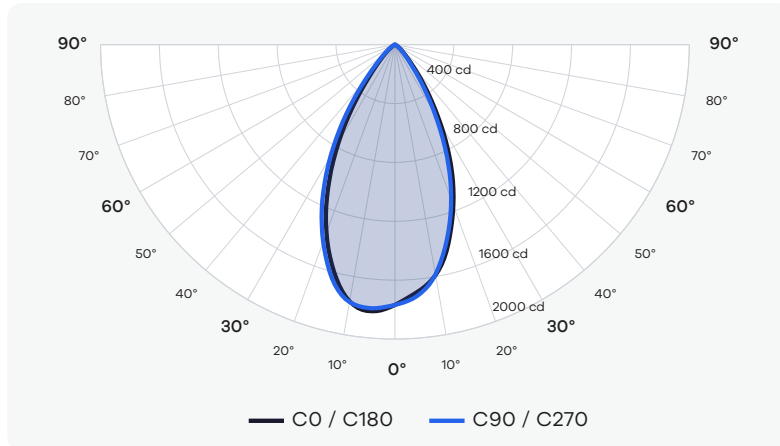

Cone of Light Tabulation

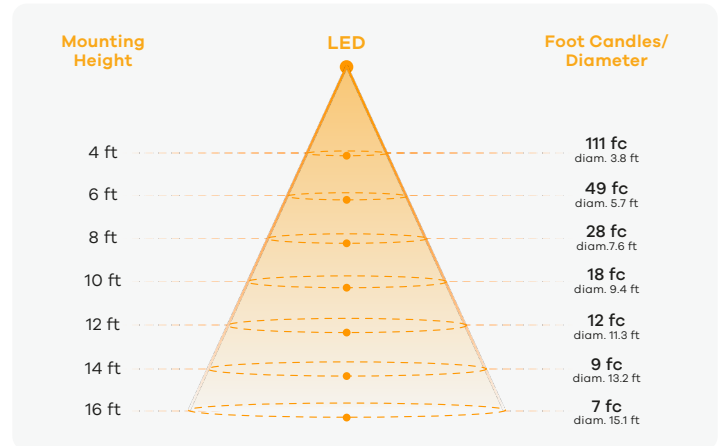

### Power Information


Voltage	119.78 V
Current	0.1173 A
Power	13.8 W
Power Factor	0.9784

### Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1470 LM		0 - 40	1189	90%
Luminaire Efficacy	110 LM/W		0 - 60	1302	99%
Maximum Candela	1768 CD		0 - 80	1315	100%

## White Narrow Trim (3500K, 98CRI, 53°-Clear, 15W)

Polar Plot

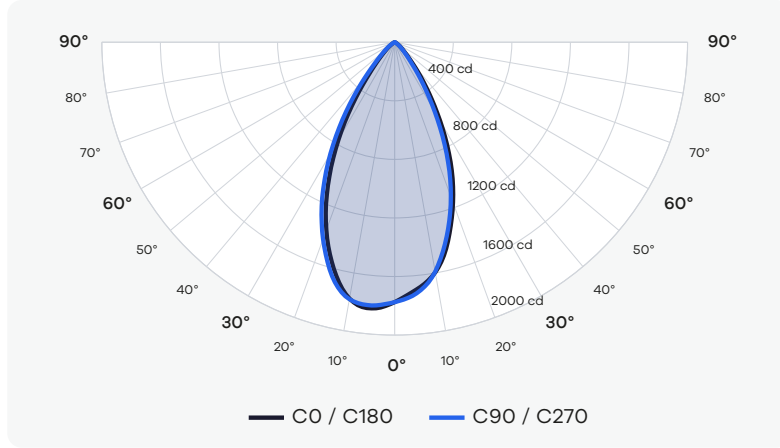

Cone of Light Tabulation

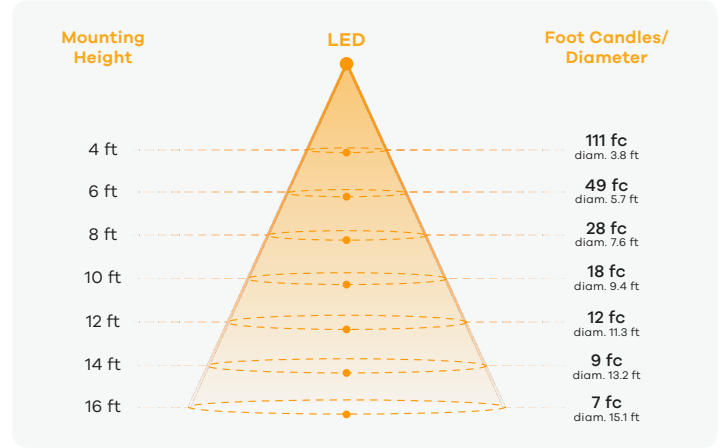

### Power Information


Voltage	119.78 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

### Summary of Results


Spacing Criteria	0 - 180: 0.47	90 - 270: 0.47	Zone	Lumens	% of Luminaire
Total Lumen Output	1475 LM		0 - 40	1194	90%
Luminaire Efficacy	98 LM/W		0 - 60	1307	99%
Maximun Candela	1775 CD		0 - 80	1320	100%

## White Narrow Trim (2700K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

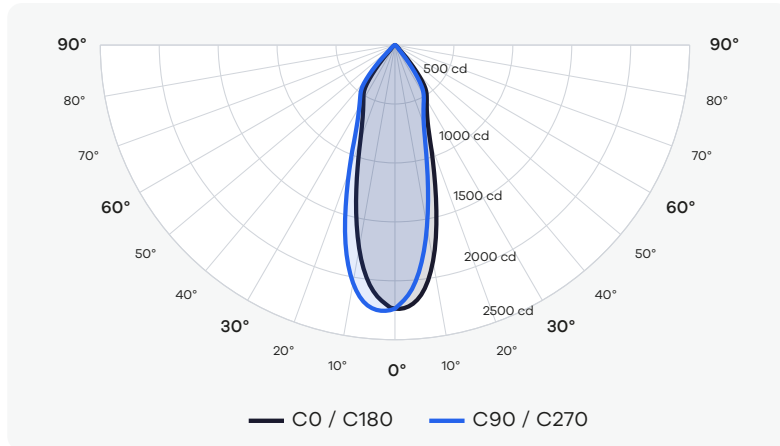

Cone of Light Tabulation

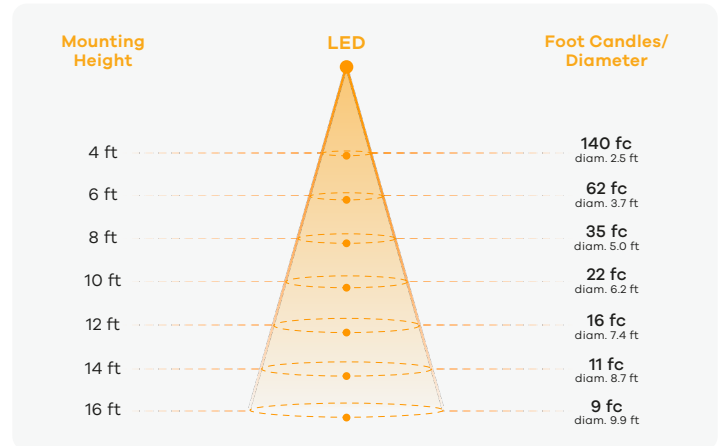

### Power Information


Voltage	119.72 V
Current	0.1168 A
Power	13.7 W
Power Factor	0.9781

### Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1286 LM		0 - 40	1134	92%
Luminaire Efficacy	86 LM/W		0 - 60	1220	99%
Maximun Candela	2236 CD		0 - 80	1234	100%

### White Narrow Trim (3000K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

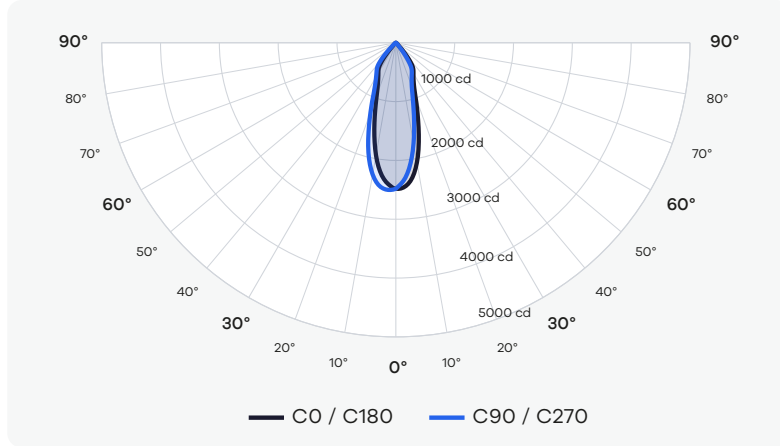

Cone of Light Tabulation

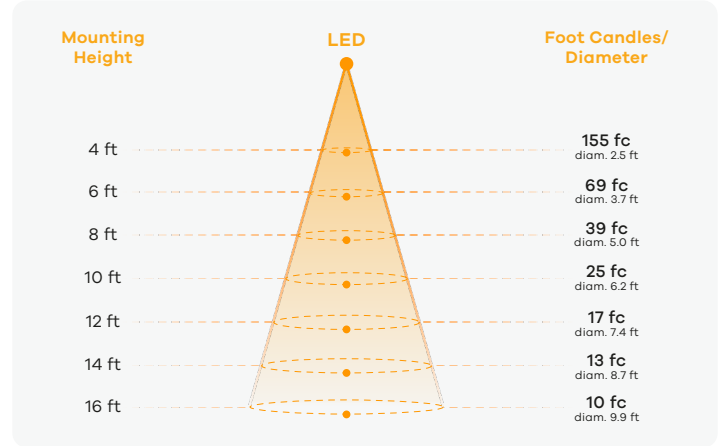

#### Power Information


Voltage	119.79 V
Current	0.1172 A
Power	13.7 W
Power Factor	0.9785

#### Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1427 LM		0 - 40	1258	92%
Luminaire Efficacy	107 LM/W		0 - 60	1354	99%
Maximun Candela	2481 CD		0 - 80	1369	100%

### White Narrow Trim (3500K, 98CRI, 34°-Silver Reflector, 15W)

Polar Plot

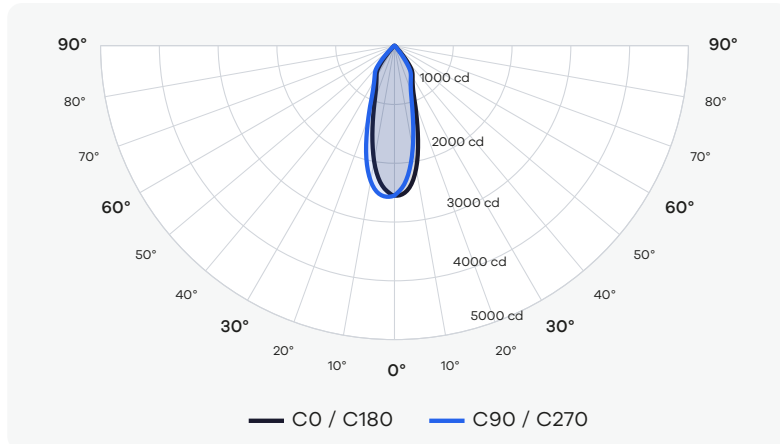

Cone of Light Tabulation

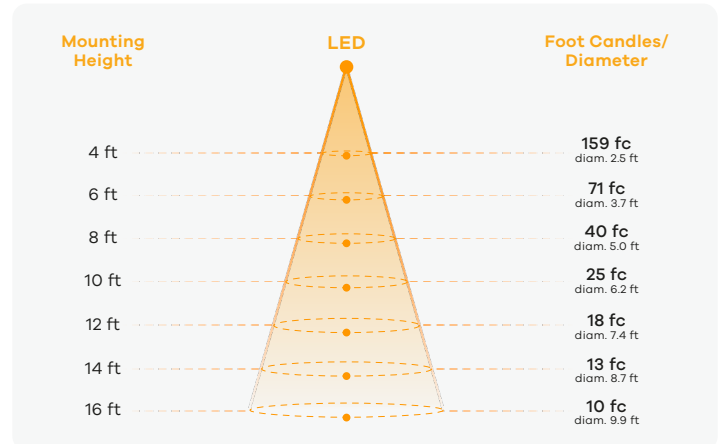

#### Power Information


Voltage	119.79 V
Current	0.1167 A
Power	13.7 W
Power Factor	0.9781

#### Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	1466 LM		0 - 40	1293	92%
Luminaire Efficacy	98 LM/W		0 - 60	1391	99%
Maximun Candela	2549 CD		0 - 80	1407	100%

## White Narrow Trim (2700K, 98CRI, 55°-Silver Reflector, 15W)

Polar Plot

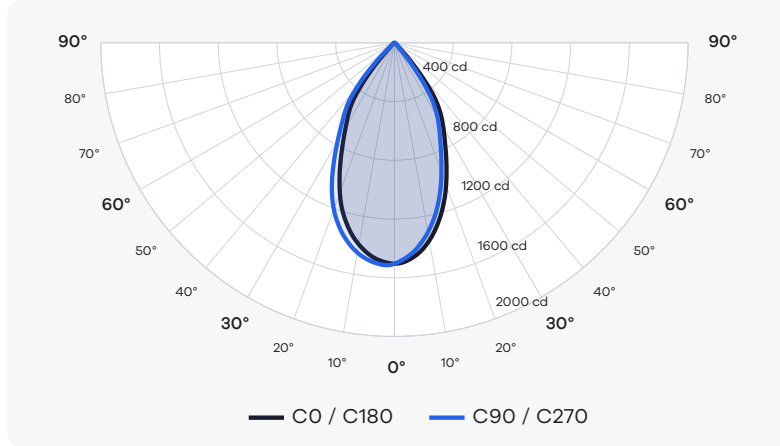

Cone of Light Tabulation

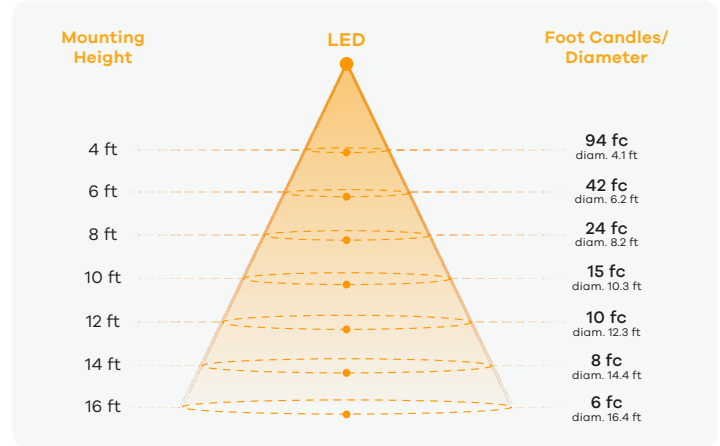

### Power Information


Voltage	119.72 V
Current	0.1171 A
Power	13.7 W
Power Factor	0.9780

### Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	1331 LM		0 - 40	1161	93%
Luminaire Efficacy	89 LM/W		0 - 60	1238	99%
Maximun Candela	1505 CD		0 - 80	1250	100%

## White Narrow Trim (3000K, 98CRI, 55°-Silver Reflector, 15W)

Polar Plot

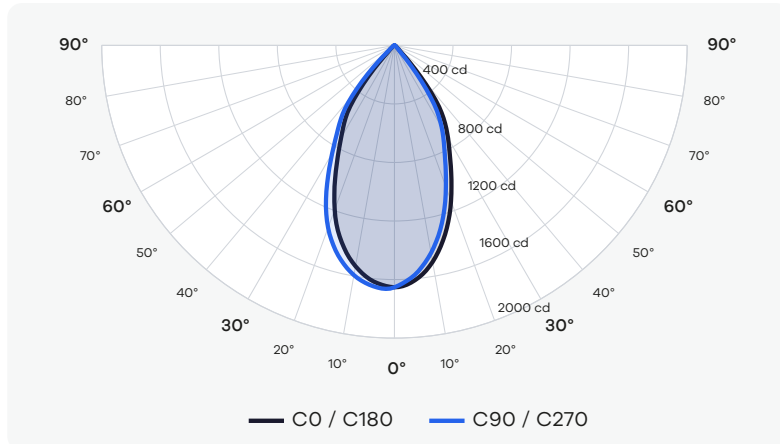

Cone of Light Tabulation

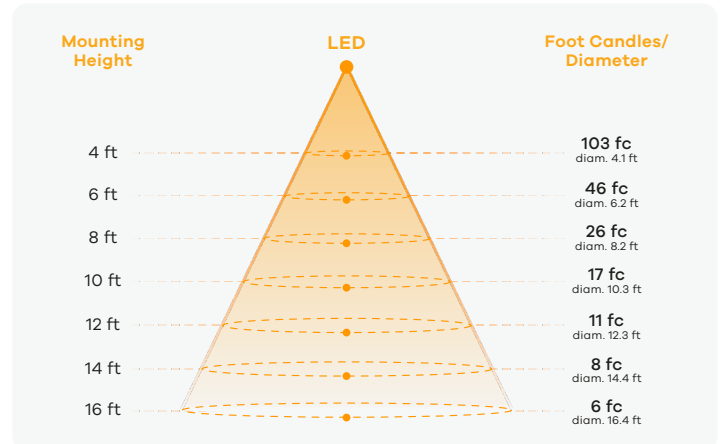

### Power Information


Voltage	119.80 V
Current	0.1164 A
Power	13.7 W
Power Factor	0.9784

### Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	1462 LM		0 - 40	1275	93%
Luminaire Efficacy	109 LM/W		0 - 60	1359	99%
Maximun Candela	1653 CD		0 - 80	1373	100%

## White Narrow Trim (3500K, 98CRI, 55°-Silver Reflector, 15W)

### Polar Plot

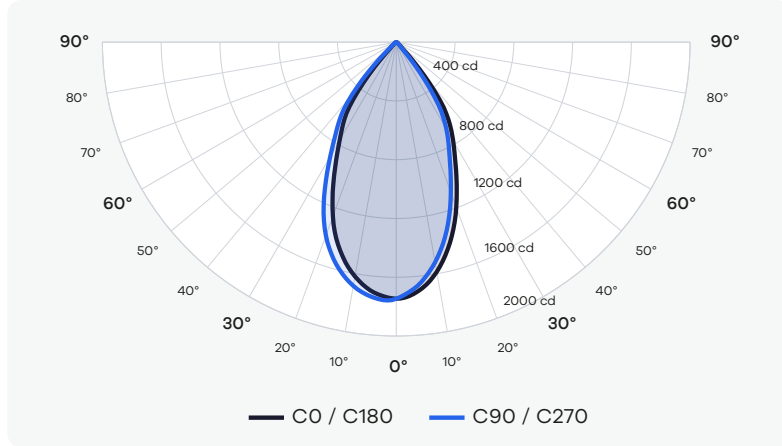

### Cone of Light Tabulation

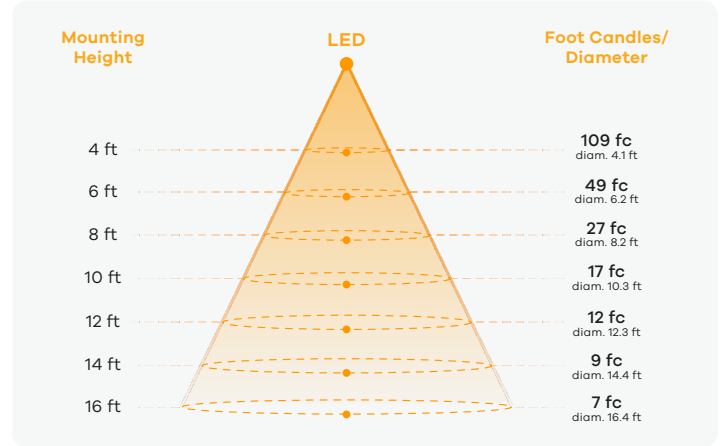

### Power Information

Voltage	119.80 V
Current	0.1173 A
Power	13.7 W
Power Factor	0.9781

### Summary of Results

Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	1544 LM		0 - 40	1347	93%
Luminaire Efficacy	103 LM/W		0 - 60	1436	99%
Maximun Candela	1746 CD		0 - 80	1450	100%