



### White Narrow Trim (2700K, 98CRI, 35°-Clear, 28W)

Polar Plot

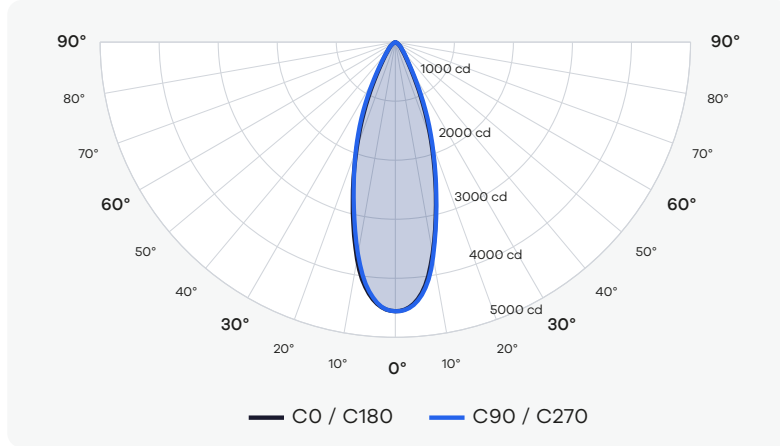

Cone of Light Tabulation

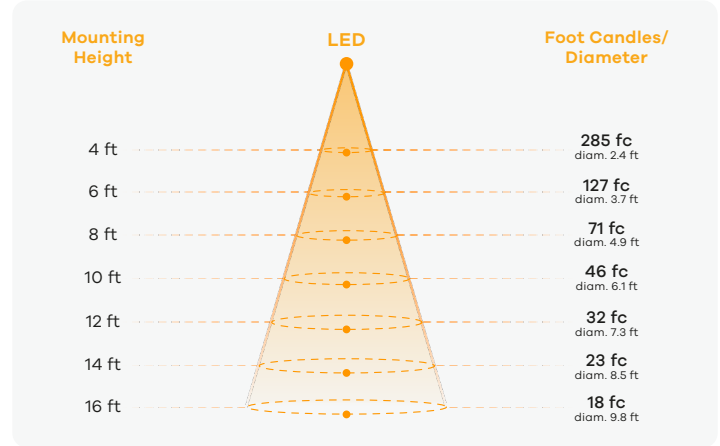

**Power Information**


Voltage	119.67 V
Current	0.2306 A
Power	27.1 W
Power Factor	0.9816

**Summary of Results**


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2126 LM		0 - 40	1787	90%
Luminaire Efficacy	76 LM/W		0 - 60	1951	99%
Maximun Candela	4558 CD		0 - 80	1976	100%

### White Narrow Trim (3000K, 98CRI, 35°-Clear, 28W)

Polar Plot

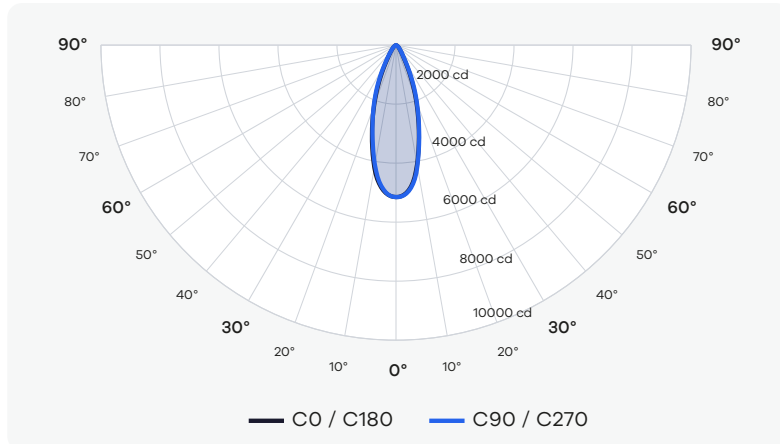

Cone of Light Tabulation

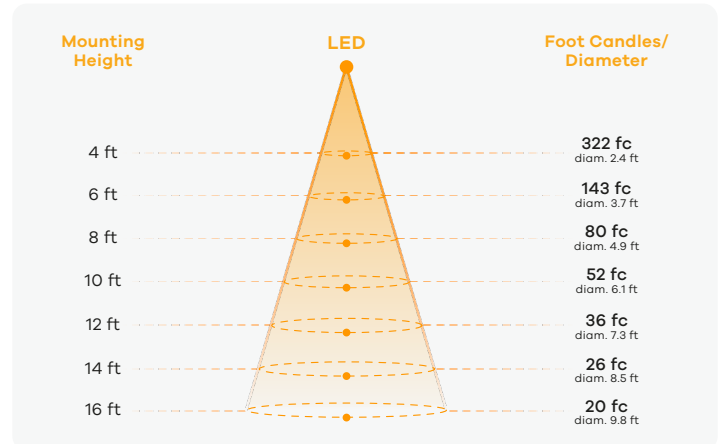

**Power Information**


Voltage	119.68 V
Current	0.2344 A
Power	27.6 W
Power Factor	0.9821

**Summary of Results**


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2402 LM		0 - 40	2019	90%
Luminaire Efficacy	91 LM/W		0 - 60	2205	99%
Maximun Candela	5151 CD		0 - 80	2233	100%

## White Narrow Trim (3500K, 98CRI, 35°-Clear, 28W)

Polar Plot

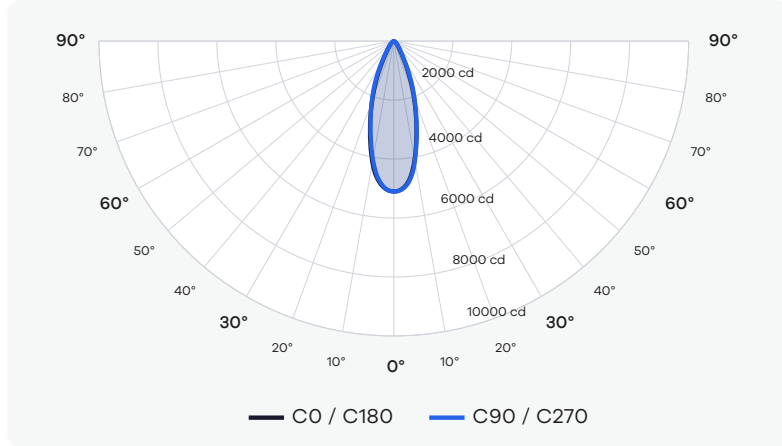

Cone of Light Tabulation

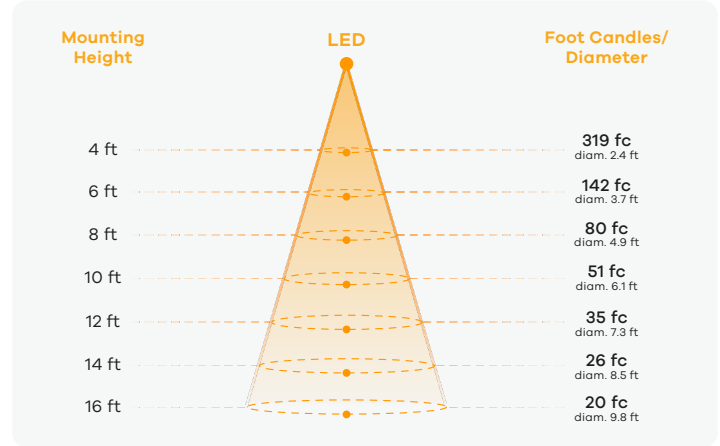

### Power Information


Voltage	119.71 V
Current	0.2307 A
Power	27.1 W
Power Factor	0.9818

### Summary of Results


Spacing Criteria	0 - 180: 0.31	90 - 270: 0.31	Zone	Lumens	% of Luminaire
Total Lumen Output	2378 LM		0 - 40	2000	90%
Luminaire Efficacy	85 LM/W		0 - 60	2183	99%
Maximun Candela	5100 CD		0 - 80	2211	100%

## White Narrow Trim (2700K, 98CRI, 42°-Clear, 28W)

Polar Plot

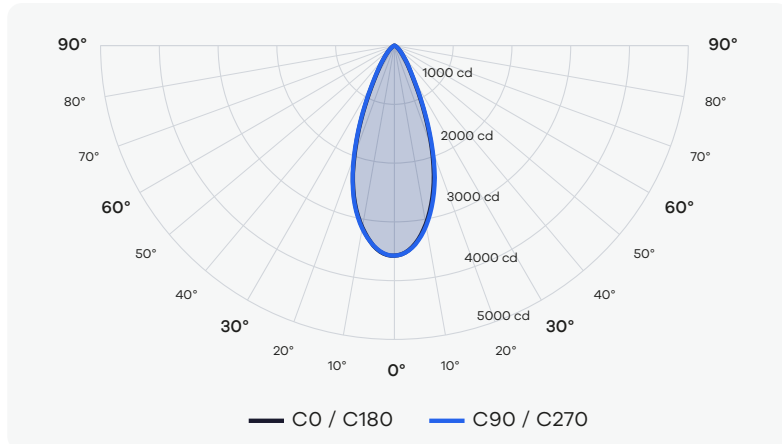

Cone of Light Tabulation

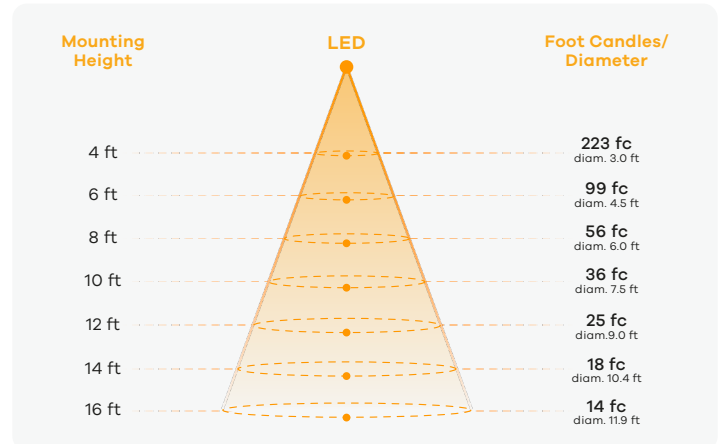

### Power Information


Voltage	119.70 V
Current	0.2301 A
Power	27.0 W
Power Factor	0.9815

### Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	2113 LM		0 - 40	1779	90%
Luminaire Efficacy	75 LM/W		0 - 60	1952	99%
Maximun Candela	3574 CD		0 - 80	1976	100%

## White Narrow Trim (3000K, 98CRI, 42°-Clear, 28W)

Polar Plot

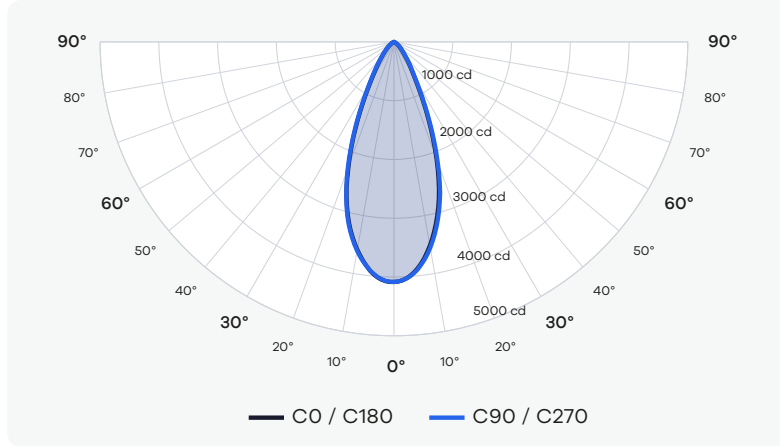

Cone of Light Tabulation

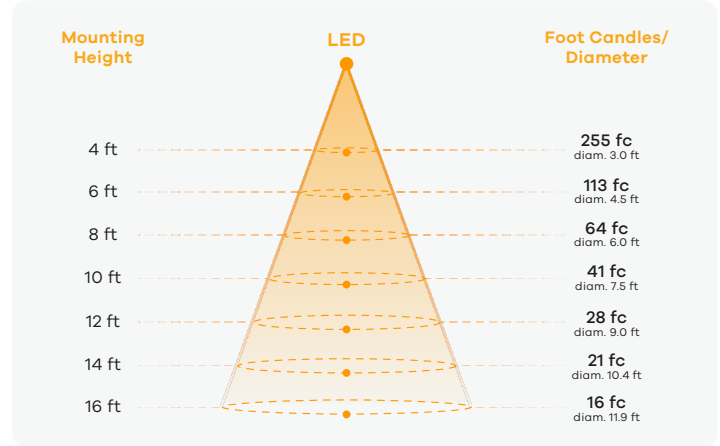

### Power Information


Voltage	119.69 V
Current	0.2339 A
Power	27.5 W
Power Factor	0.9821

### Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	2415 LM		0 - 40	2033	90%
Luminaire Efficacy	91 LM/W		0 - 60	2231	99%
Maximun Candela	4085 CD		0 - 80	2258	100%

## White Narrow Trim (3500K, 98CRI, 42°-Clear, 28W)

Polar Plot

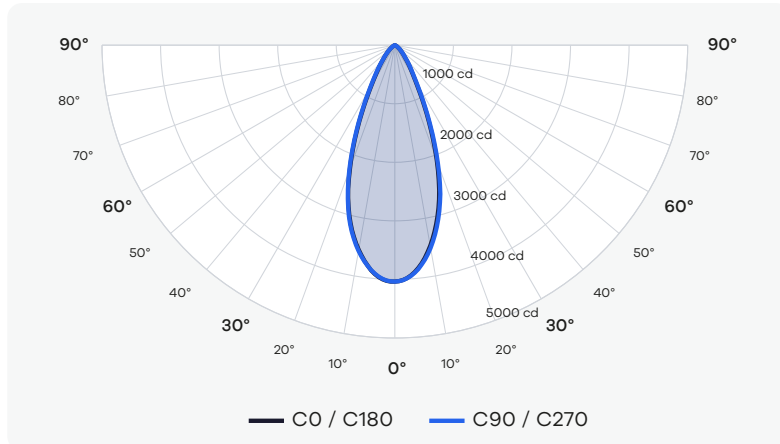

Cone of Light Tabulation

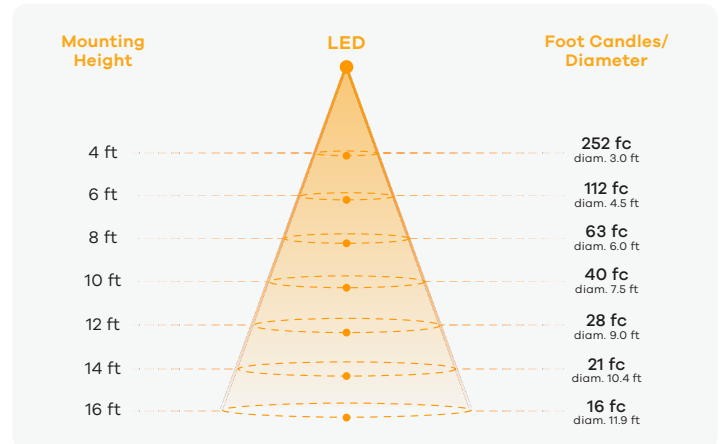

### Power Information


Voltage	119.71 V
Current	0.2305 A
Power	27.1 W
Power Factor	0.9817

### Summary of Results


Spacing Criteria	0 - 180: 0.37	90 - 270: 0.37	Zone	Lumens	% of Luminaire
Total Lumen Output	2387 LM		0 - 40	2010	90%
Luminaire Efficacy	85 LM/W		0 - 60	2205	99%
Maximun Candela	4037 CD		0 - 80	2232	100%

### White Narrow Trim (2700K, 98CRI, 53°-Clear, 28W)

Polar Plot

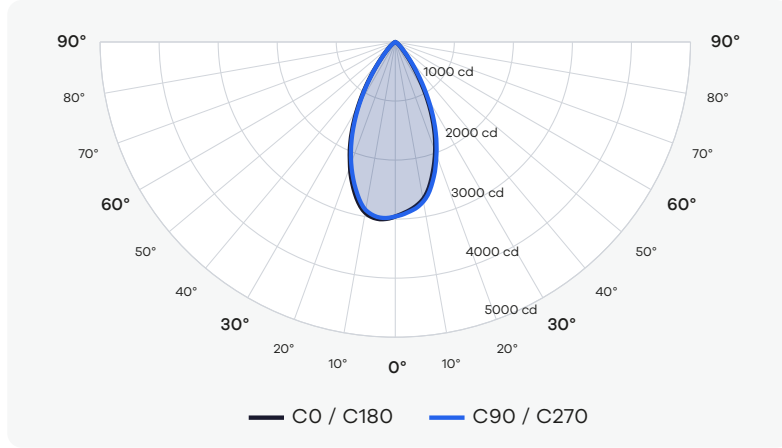

Cone of Light Tabulation

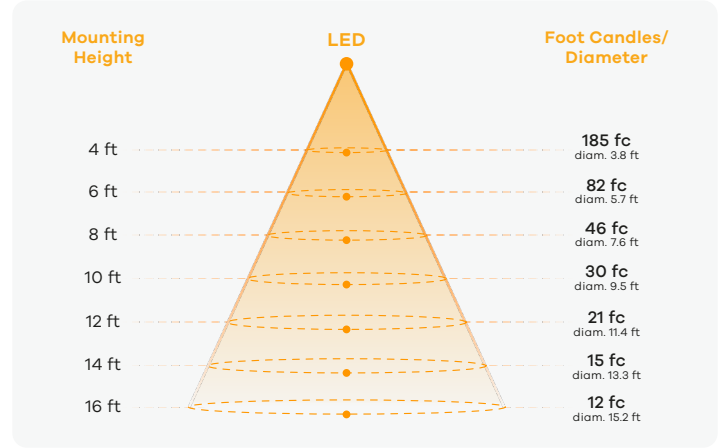

#### Power Information


Voltage	119.69 V
Current	0.2299 A
Power	27.0 W
Power Factor	0.9815

#### Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2409 LM		0 - 40	1994	91%
Luminaire Efficacy	86 LM/W		0 - 60	2170	99%
Maximun Candela	2955 CD		0 - 80	2191	100%

### White Narrow Trim (3000K, 98CRI, 53°-Clear, 28W)

Polar Plot

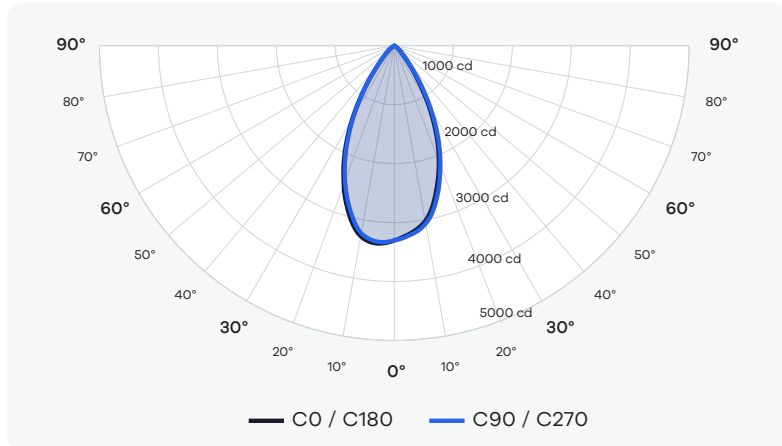

Cone of Light Tabulation

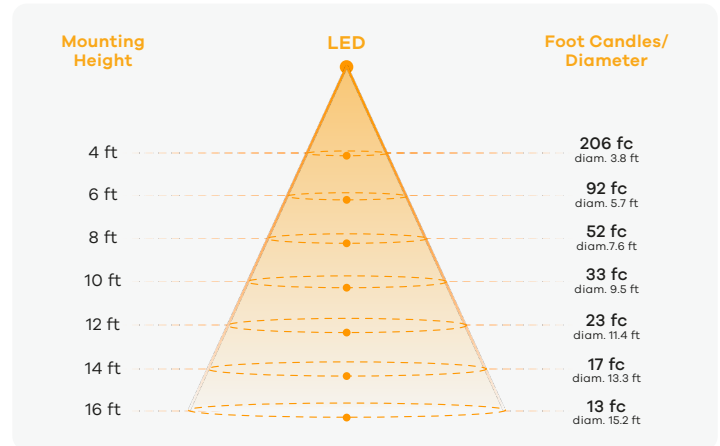

#### Power Information


Voltage	119.70 V
Current	0.2337 A
Power	27.5 W
Power Factor	0.9821

#### Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2692 LM		0 - 40	2228	91%
Luminaire Efficacy	102 LM/W		0 - 60	2426	99%
Maximun Candela	3303 CD		0 - 80	2449	100%

## White Narrow Trim (3500K, 98CRI, 53°-Clear, 28W)

Polar Plot

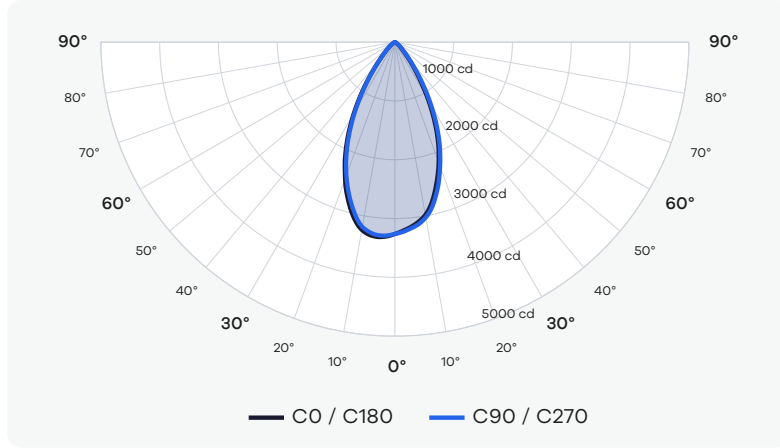

Cone of Light Tabulation

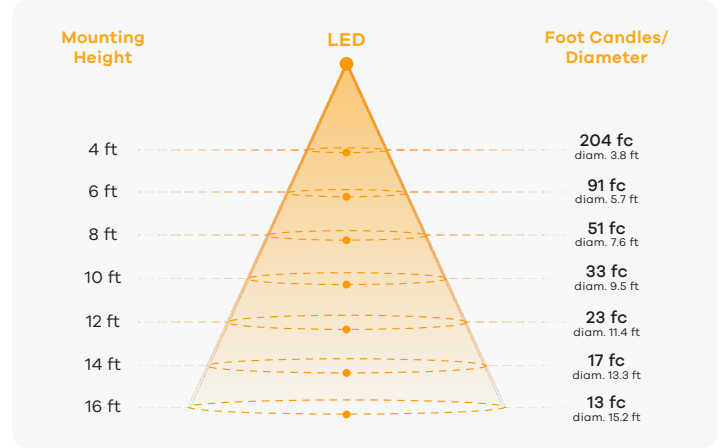

### Power Information


Voltage	119.71 V
Current	0.2302 A
Power	27.1 W
Power Factor	0.9817

### Summary of Results


Spacing Criteria	0 - 180: 0.48	90 - 270: 0.48	Zone	Lumens	% of Luminaire
Total Lumen Output	2659 LM		0 - 40	2201	91%
Luminaire Efficacy	95 LM/W		0 - 60	2396	99%
Maximun Candela	3263 CD		0 - 80	2419	100%

## White Narrow Trim (2700K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

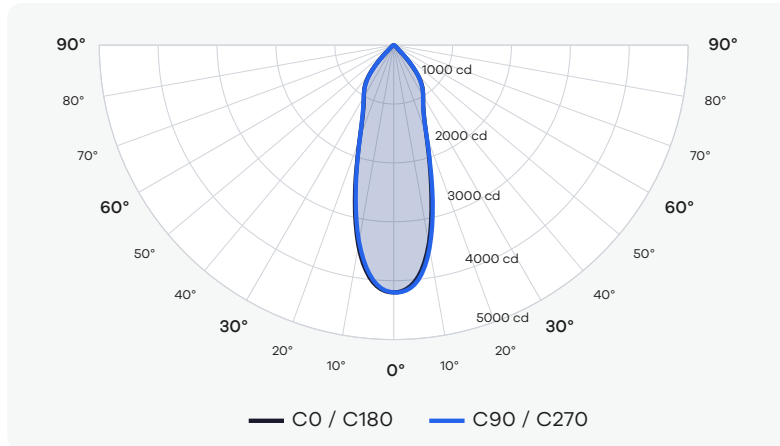

Cone of Light Tabulation

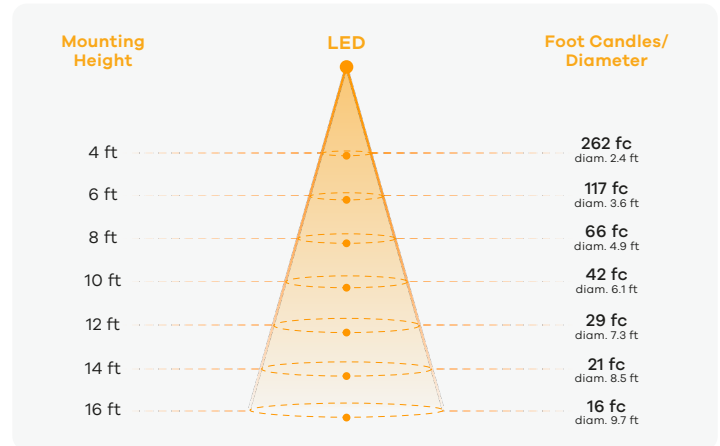

### Power Information


Voltage	119.68 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

### Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	2394 LM		0 - 40	2112	89%
Luminaire Efficacy	85 LM/W		0 - 60	2341	99%
Maximun Candela	4200 CD		0 - 80	2368	100%

### White Narrow Trim (3000K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

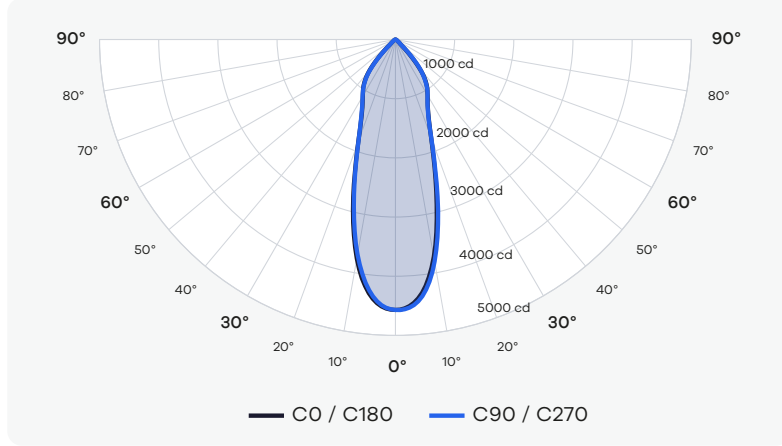

Cone of Light Tabulation

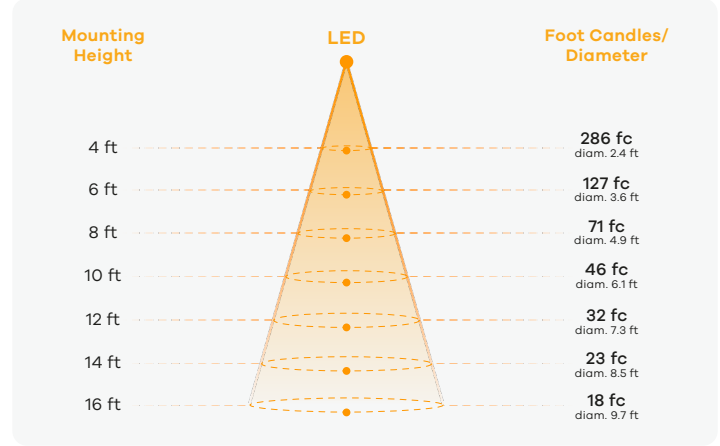

#### Power Information


Voltage	119.69 V
Current	0.2335 A
Power	27.4 W
Power Factor	0.9821

#### Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	2605 LM		0 - 40	2299	89%
Luminaire Efficacy	98 LM/W		0 - 60	2547	99%
Maximun Candela	4570 CD		0 - 80	2576	100%

### White Narrow Trim (3500K, 98CRI, 34°-Silver Reflector, 28W)

Polar Plot

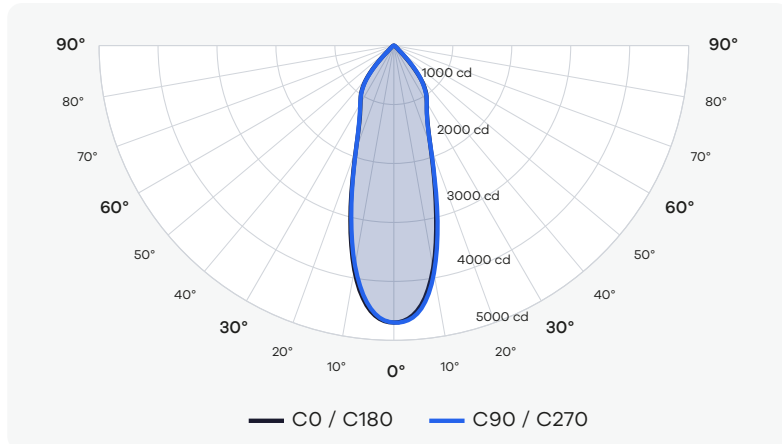

Cone of Light Tabulation

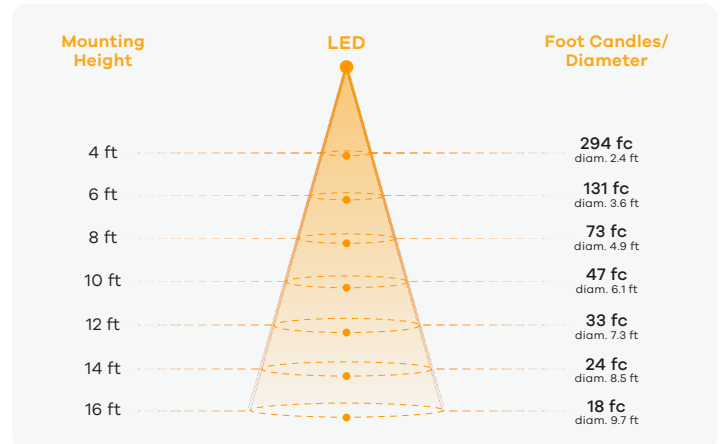

#### Power Information


Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

#### Summary of Results


Spacing Criteria	0 - 180: 0.3	90 - 270: 0.3	Zone	Lumens	% of Luminaire
Total Lumen Output	2678 LM		0 - 40	2363	89%
Luminaire Efficacy	96 LM/W		0 - 60	2619	99%
Maximun Candela	4699 CD		0 - 80	2649	100%

## White Narrow Trim (2700K, 98CRI, 55°-Silver Reflector, 28W)

Polar Plot

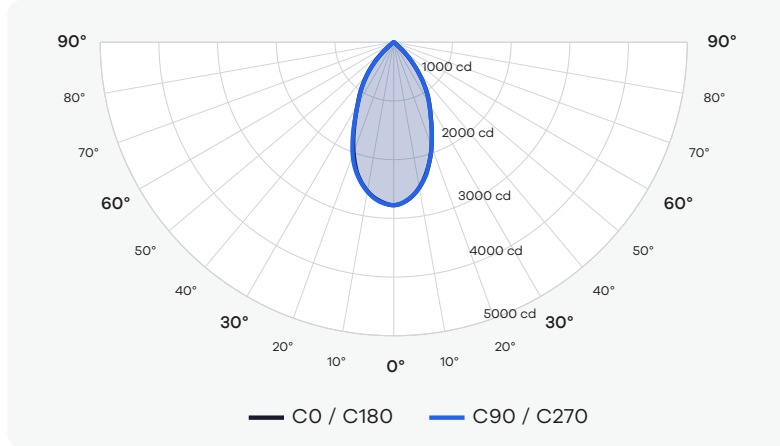

Cone of Light Tabulation

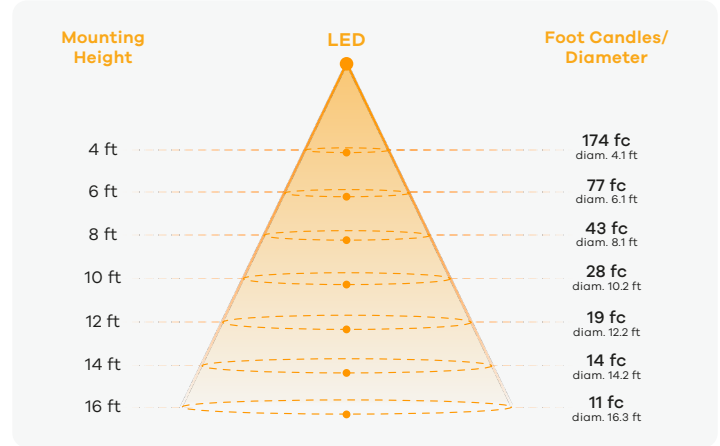

### Power Information


Voltage	119.70 V
Current	0.2297 A
Power	27.0 W
Power Factor	0.9815

### Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	2430 LM		0 - 40	2143	87%
Luminaire Efficacy	87 LM/W		0 - 60	2433	99%
Maximun Candela	2776 CD		0 - 80	2456	100%

## White Narrow Trim (3000K, 98CRI, 55°-Silver Reflector, 28W)

Polar Plot

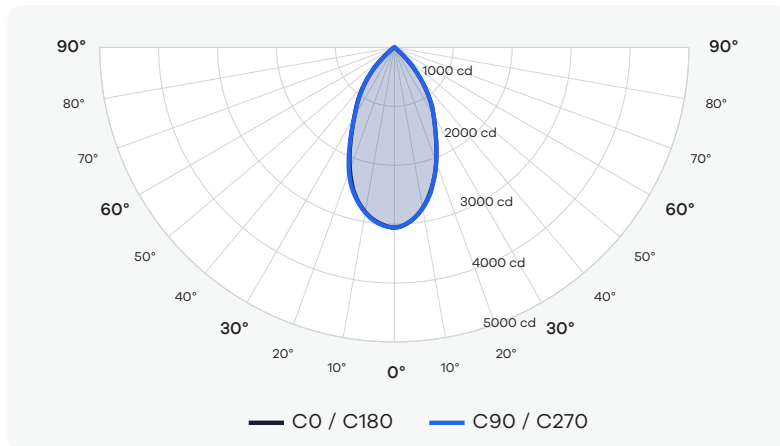

Cone of Light Tabulation

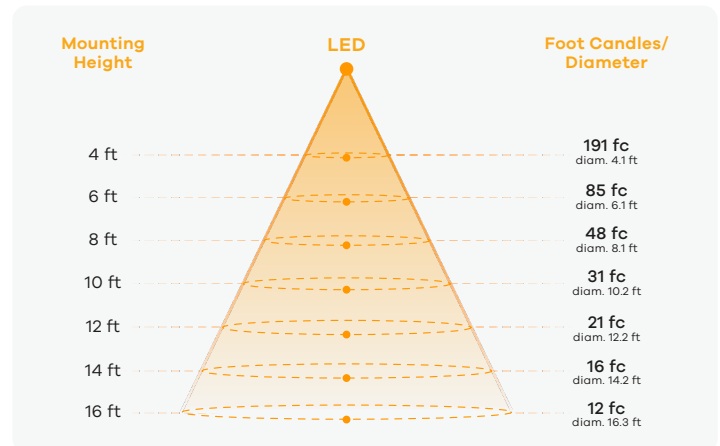

### Power Information


Voltage	119.71 V
Current	0.2334 A
Power	27.4 W
Power Factor	0.9821

### Summary of Results


Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	2677 LM		0 - 40	2361	87%
Luminaire Efficacy	101 LM/W		0 - 60	2680	99%
Maximun Candela	3058 CD		0 - 80	2706	100%

## White Narrow Trim (3500K, 98CRI, 55°-Silver Reflector, 28W)

### Polar Plot

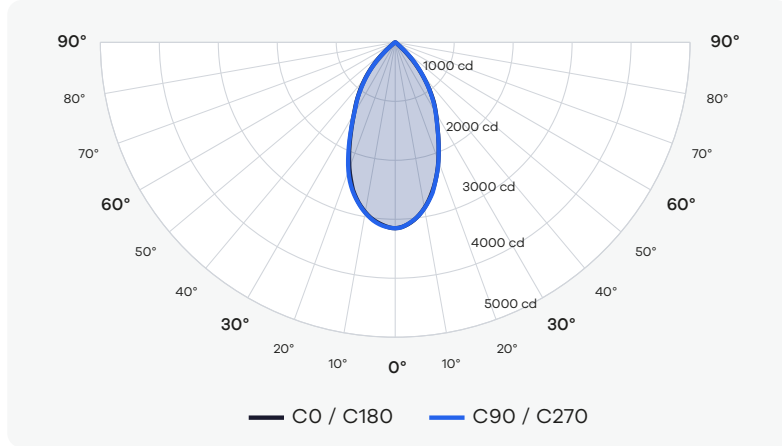

### Cone of Light Tabulation

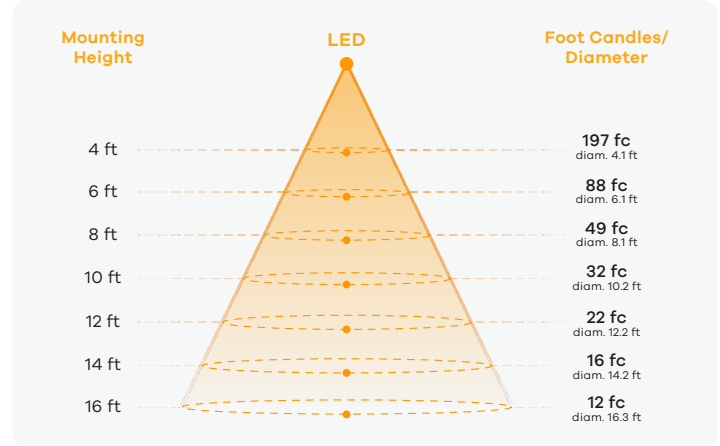

### Power Information

Voltage	119.71 V
Current	0.2300 A
Power	27.0 W
Power Factor	0.9817

### Summary of Results

Spacing Criteria	0 - 180: 0.51	90 - 270: 0.51	Zone	Lumens	% of Luminaire
Total Lumen Output	2759 LM		0 - 40	2433	87%
Luminaire Efficacy	99 LM/W		0 - 60	2762	99%
Maximun Candela	3152 CD		0 - 80	2788	100%