

Aster



Mini Interchangeable Module

Product Information

Description	MM/4W/LED/5CCT
Color temp	27, 30, 35, 41, 50k
Output lumens	320
Beam angle	40°
Input volts	120V
Wattage	4W
CRI	90>
mA	90mA
Output volts	33-38V
IC rated	YES
Dimmable	Triac
Plenum rated	FT6
Packed	18



Trim Options

[Round/Square Trims](#)
[Round Trimless](#)
[Square Trimless](#)


Lens Options

Clear Lens



G-15091
L/MINI/24-DEGREE



G-15093
L/MINI/60-DEGREE



G-15097
M/SOLITE LENS



G-15098
M/PRISMATIC LENS

Diffuser



G-15099
M/HEX/HC/DIFFUSER

Accessories



Emergency LED Driver

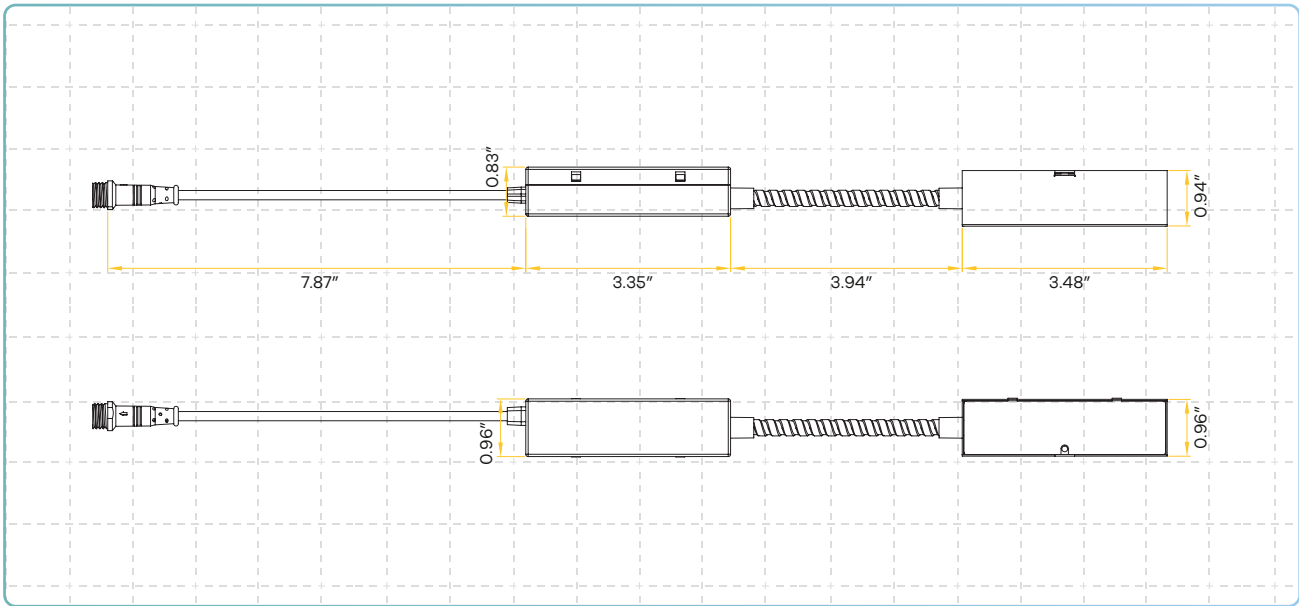
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Driver Dimensions



Dimmer List

Brand	Load	Model
LUTRON	150W	LECL-153P
		CTCL-150H
		LGCL-153PLH
		CTCL-153P
		SCL-153P
		PD-6WCL
		PD-5NE
		DVCL-153P
		TGCL-153P
		AYCL-153P
		MSCL-OP153M
		STCL-153M
		DVRF-6L
	250W	PD-10NXD
		DVCL253
		DVRP-253
	300W	MRF2S-6CL
		DVELV-300P
		SELVB-300P
	600W	MACL-153M
		MRF2-600M
		DVLV603
		MA-600

Brand	Load	Model
LEVITON	150W	IPL06
		6672
		6674
		RDL06-10Z
		RNL06-10Z
	300W	DSL06-1LZ
		D26HD
PASS & SEYMOUR	250W	LSCL450W
		WSCL450W
EATON	300W	DDE06-BLZ
		AAL06

0-10V Dimming	
Brand	Model
LUTRON	DVSTV
	DVSCTV
LEVITON	IP710-DLZ
	DS710-10Z
LEGRAND	RH4FBL3P
COOPER	SF10P