



Eclipse Series



Selectable Color




CRI 90+ True Colors




Wet Location IP65



Air Tight




36° Beam Angle



Dimmable




IC Rated

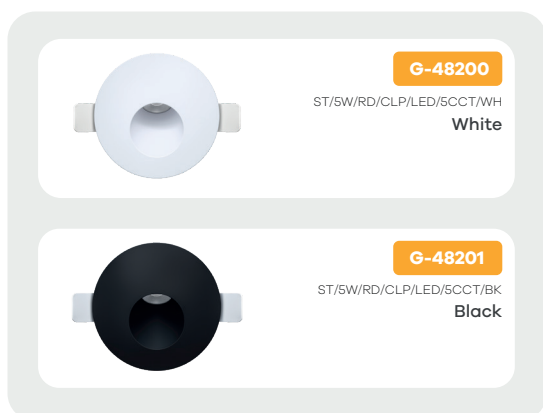

Product Information

Color temp	27, 30, 35, 41, 50k	IC rated	Yes
Shape	Round	Dimmable	Triac
Output lumens	350	Plenum rated	FT6
Beam angle	36°	Cut out	2.36"
Input volts	120V	Height	2.23"
Wattage	5W	Width	2.76"
CRI	90+	Depth	1.46"
mA	110mA	Packed	18

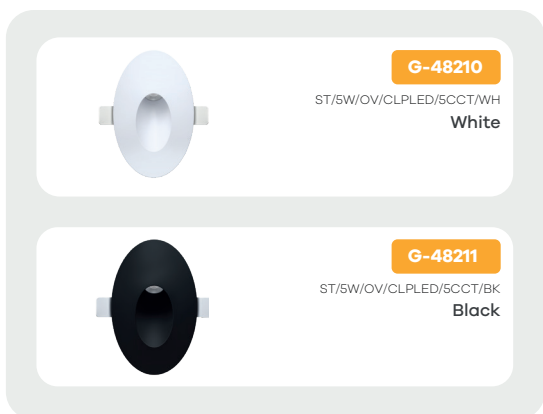

Product Information

Color temp	27, 30, 35, 41, 50k	IC rated	Yes
Shape	Oval	Dimmable	Triac
Output lumens	350	Plenum rated	FT6
Beam angle	36°	Cut out	3.05" X 1.85"
Input volts	120V	Height	4.96"
Wattage	5W	Width	3.15"
CRI	90+	Depth	1.48"
mA	110mA	Packed	18



Product Information

Color temp	27, 30, 35, 41, 50k	IC rated	Yes
Shape	Vertical	Dimmable	Triac
Output lumens	200	Plenum rated	FT6
Beam angle	80°	Cut out	2.50" X 2.50"
Input volts	120V	OD	3.07" X 4.95"
Wattage	5W	Depth	2.76"
CRI	90+	Packed	18
mA	110mA		

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Light Driver
5W G-95823




Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823




New Construction Plate
G-98819

Dimensions

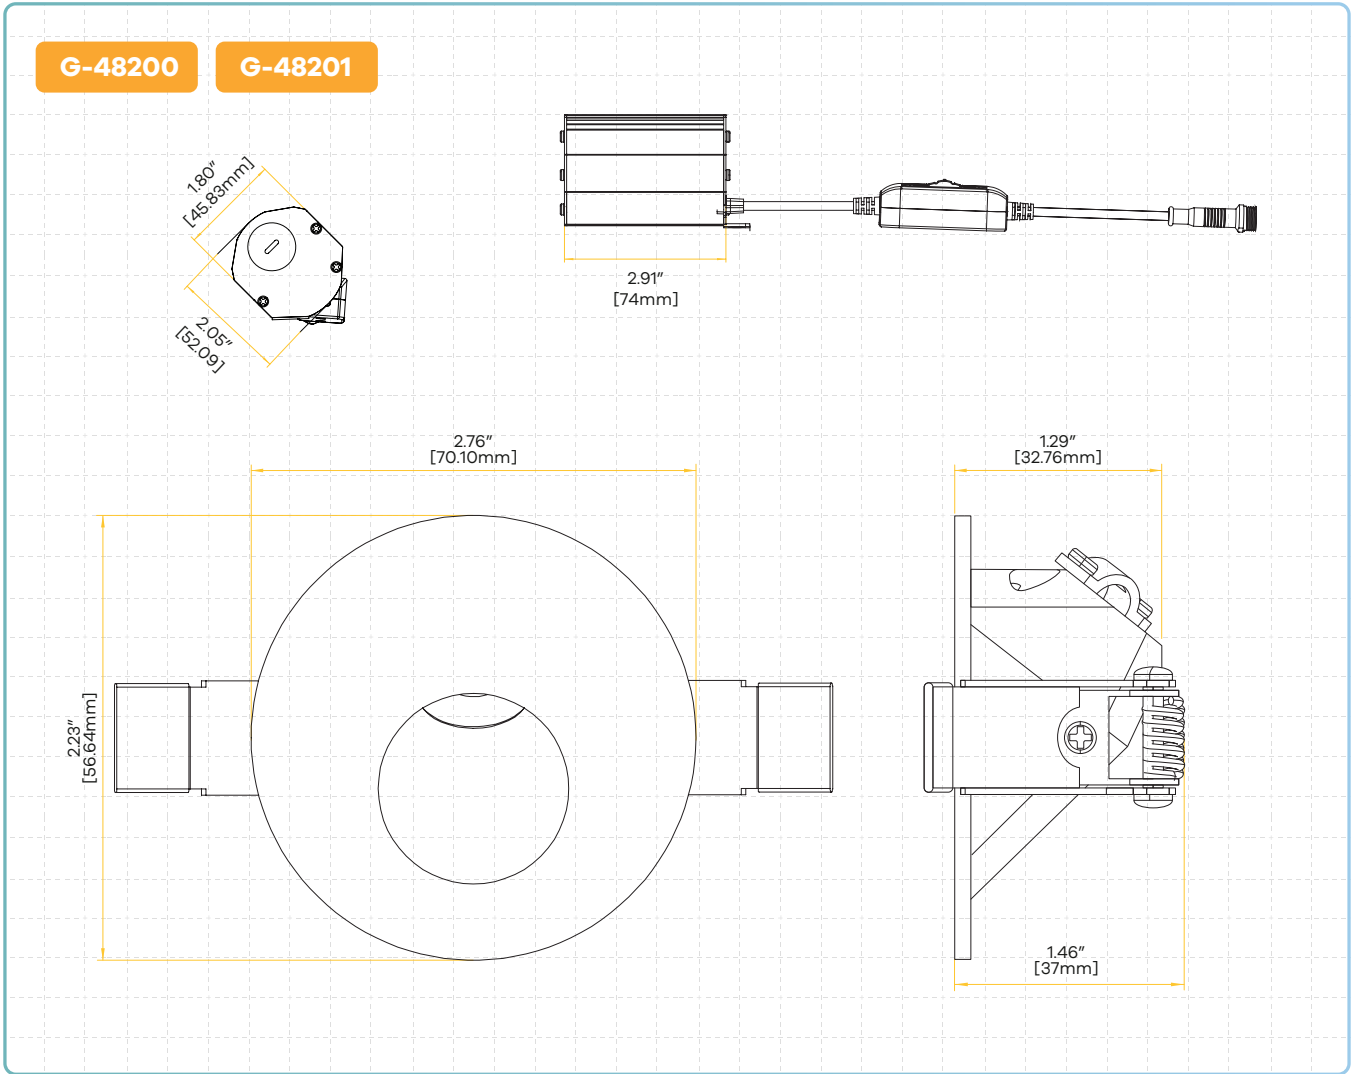

Dimensions

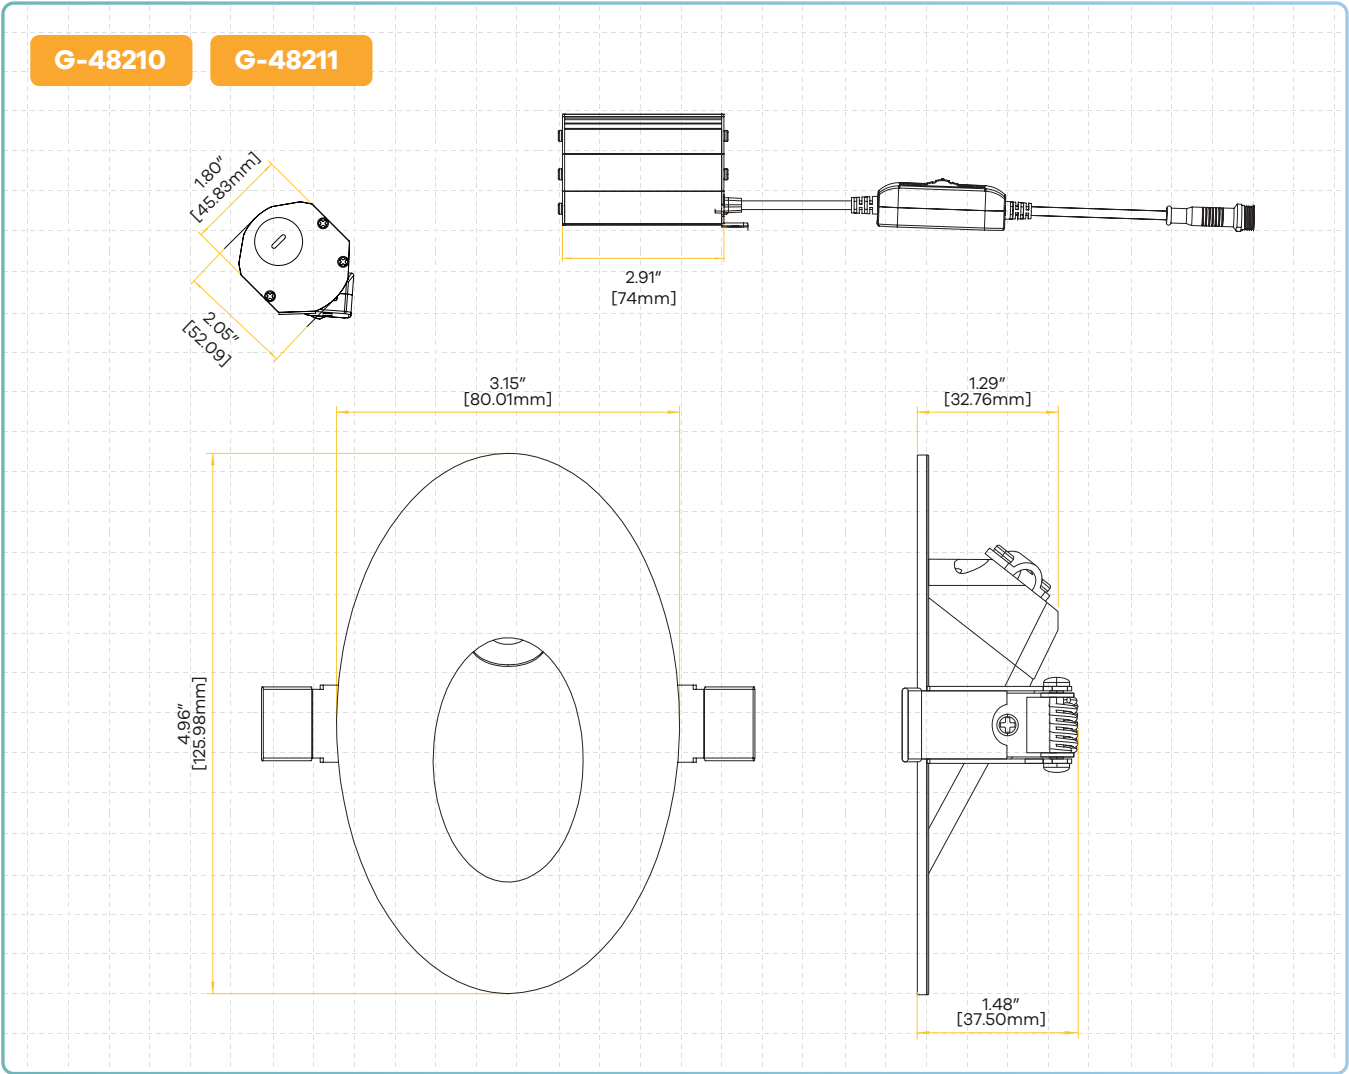

Dimensions

