

Ellipse 3.5"

Oval Double Head Multiple


Product Information

Color temp	27, 30, 35, 41, 50K
Output lumens	2700
Beam angle	60°
Input volts	120-277V
Wattage	28W
CRI	90+
mA	650mA
IC rated	YES
Dimmable	Triac or 0-10v
Plenum rated	FT6
Cut out	3.70" X 7.48" Oval
OD	4.13" X 7.87"
Height	3.25"
Packed	12



G-23342

R3.5/28W/GR/OVL/
M2/LED/5CCT
White

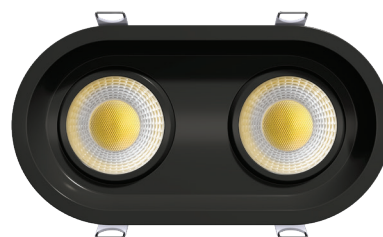

G-23352

R3.5/28W/GR/OVL/
M2/LED/5CCT/BK
Black

Lens Options

Clear Lens



G-25621
L3.5/40-DEGREE



G-25622
L3.5/60-DEGREE



Selectable
Color



CRI **90+**
True Colors



Air Tight



60° Beam
Angle



Dimmable



IC Rated



Accessories



Emergency LED Driver

25W G-95525
30W G-48411
60W G-95521



Extension Cords


5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823



New Construction Plate

G-98811 1 Punch Out

Dimensions

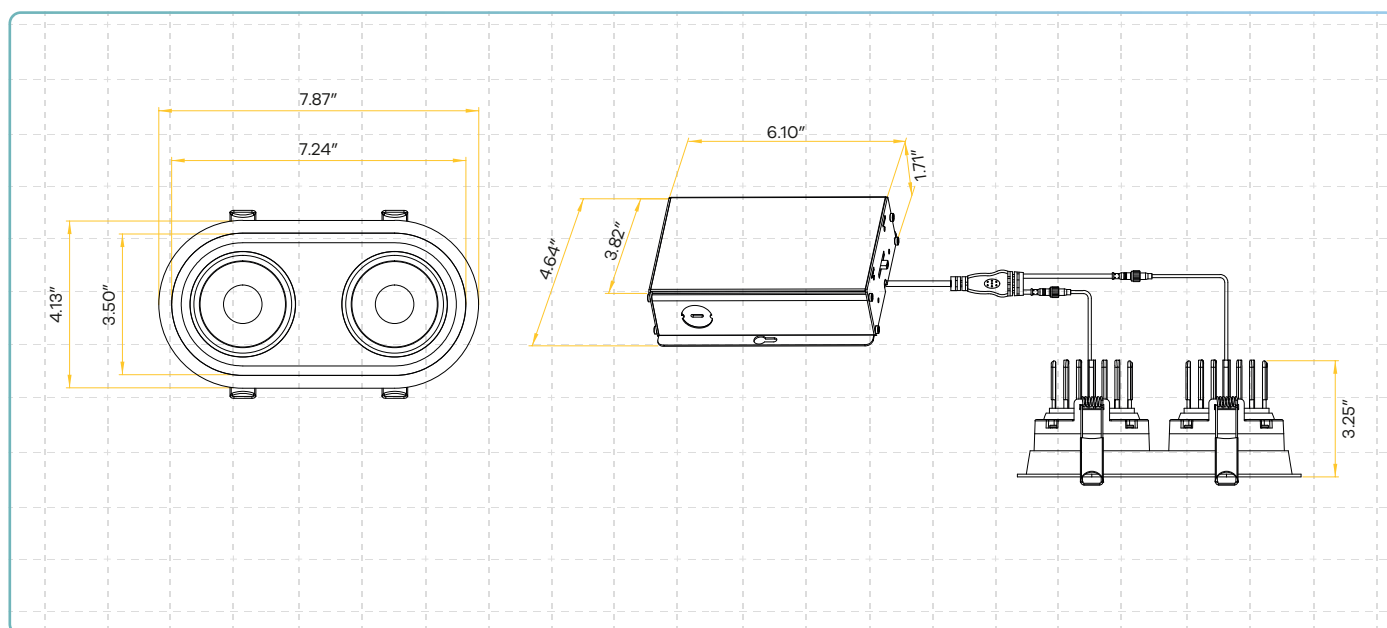

Dimmer list

Brand	Load	Model
LUTRON	150W	LECL-153P
		CTCL-150H
		LGCL-153PLH
		CTCL-153P
		SCL-153P
		PD-6WCL
		PD-5NE
		DVCL-153P
		TGCL-153P
		AYCL-153P
		MSCL-OP153M
		STCL-153M
		DVRF-6L
	250W	PD-10NXD
		DVCL253
		DVRP-253
		MRF2S-6CL
	300W	DVELV-300P
		SELVB-300P
	600W	MACL-153M
		MRF2-600M
		DVLV603
		MA-600

Brand	Load	Model
LEVITON	150W	IPL06
		6672
		6674
		RDL06-10Z
		RNL06-10Z
	300W	DSL06-1LZ
PASS & SEYMOUR	250W	D26HD
		LSCL450W
	EATON	300W
DDE06-BLZ		

0-10V Dimming

Brand	Model
LUTRON	DVSTV
	DVSCVT
LEVITON	IP710-DLZ
	DS710-10Z
LEGRAND	RH4FBL3P
COOPER	SF10P