


Ellipse 3"

Oval Four Head Multiple

Product Information


Color temp	27, 30, 35, 41, 50K
Output lumens	2800
Beam angle	40°
Input volts	120-277V
Wattage	30W
CRI	90+
mA	720mA
IC rated	YES
Dimmable	Triac or 0-10v
Plenum rated	FT6
Cut out	2.95" X 12.44" Oval
OD	12.68" X 6.38"
Height	2.51"
Packed	6

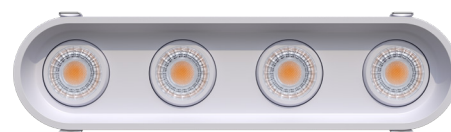

G-23304

R3/30W/GR/OVL/
M4/LED/5CCT

White

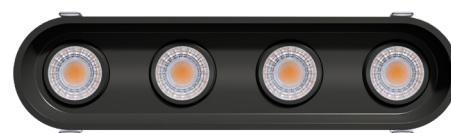

G-23314

R3/30W/GR/OVL/
M4/LED/5CCT/BK

Black

Lens Options

Clear Lens





G-01420
L3/24-DEGREE



G-01421
L3/40-DEGREE



G-01422
L3/60-DEGREE




Accessories



Emergency LED Driver

25W G-95525
30W G-48411
60W G-95521



New Construction Plate

G-98812 3 Punch Out

Dimensions

