

Equator Frame Panel Fixture



Selectable Color



CRI 80+ True Colors



Damp Location



120° Beam Angle



Dimmable



Wattage Selectable

1' x 4'

G-12120

G-12121 EM



Product Information

Description	F/1X4/40W/FP/3WS/5CCT	CRI	80>
Description EM	F/1X4/40W/FP/3WS/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	11.75" x 47.75"
Output lumens	2600/3900/5200	Height	0.59"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	6
Wattage	20W/30W/40W		

2' x 2'

G-12122

G-12123 EM



Product Information

Description	F/2X2/40W/FP/3WS/5CCT	CRI	80>
Description EM	F/2X2/40W/FP/3WS/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.70" x 23.70"
Output lumens	2600/3900/5200	Height	0.59"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	6
Wattage	20W/30W/40W		

2' x 4'

G-12124

G-12125 EM



Product Information

Color temp	30, 35, 41, 50, 65K	Dimensions	23.70" x 47.75"
Beam angle	120°	Height	0.59"
Input volts	120/277V	Warranty	5 years
CRI	80>	Packed	6
Dimmable	0-10V Dimmable		

G-12124

Description	F/2X4/60W/FP/3WS/5CCT
Output lumens	5200/6500/7800
Wattage	40/50/60W



G-12125 EM

Description	F/2X4/50W/FP/3WS/5CCT/EM
Output lumens	3900/5200/6500
Wattage	30/40/50W

Dimensions


G-12120

G-12121 EM

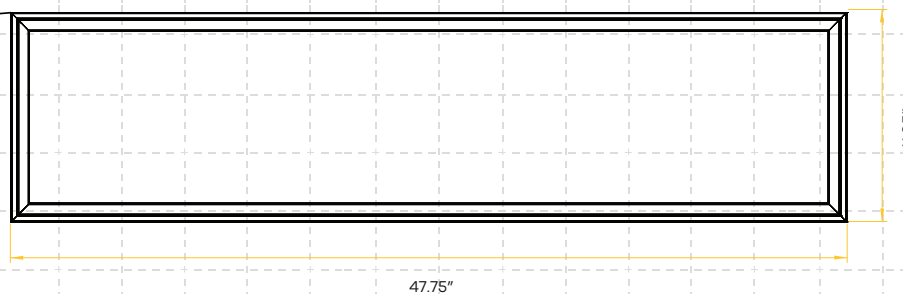

Dimensions

G-12122 G-12123 EM

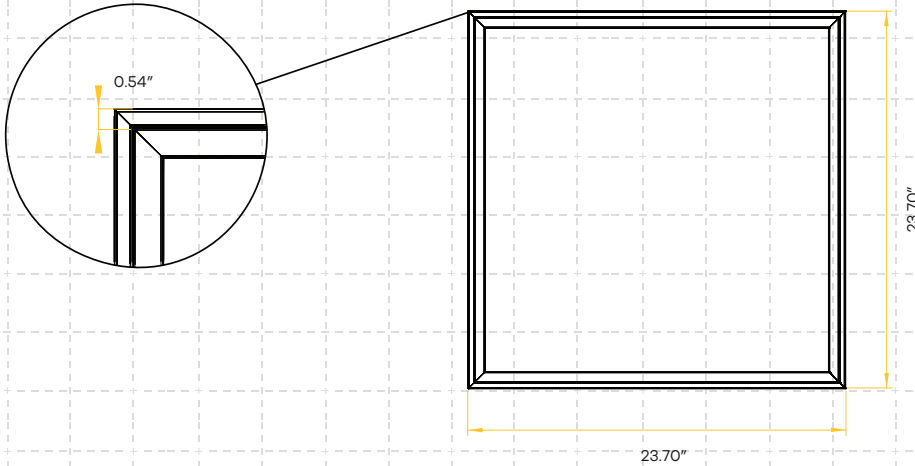

G-12124 G-12125 EM

