

Fabulon 4"

Round Flushed Baffle Slim

Product Information

Description	SB4/12W/R/LED/5CCT
Color temp	27, 30, 35, 41, 50k
Output lumens	1000
Beam angle	100°
Input volts	120/277V
Wattage	12W
CRI	90>
mA	270mA
Output volts	38V
Dimmable	Triac Or 0-10V Dimming
Cut out	4.20"
OD	5.07"
Height	1.19"
Packed	18

G-97822

5 Selectable Color



90+ CRI 90+ True Colors

Wet Location

Air Tight

100° Beam Angle

Dimmable

IC Rated



JA8
TITLE 24



FC

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Light Driver

12W G-95824



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823



New Construction Plate


G-19975 4 Punch Out



New Construction Plate

G-19979 4 Punch Out

Dimensions

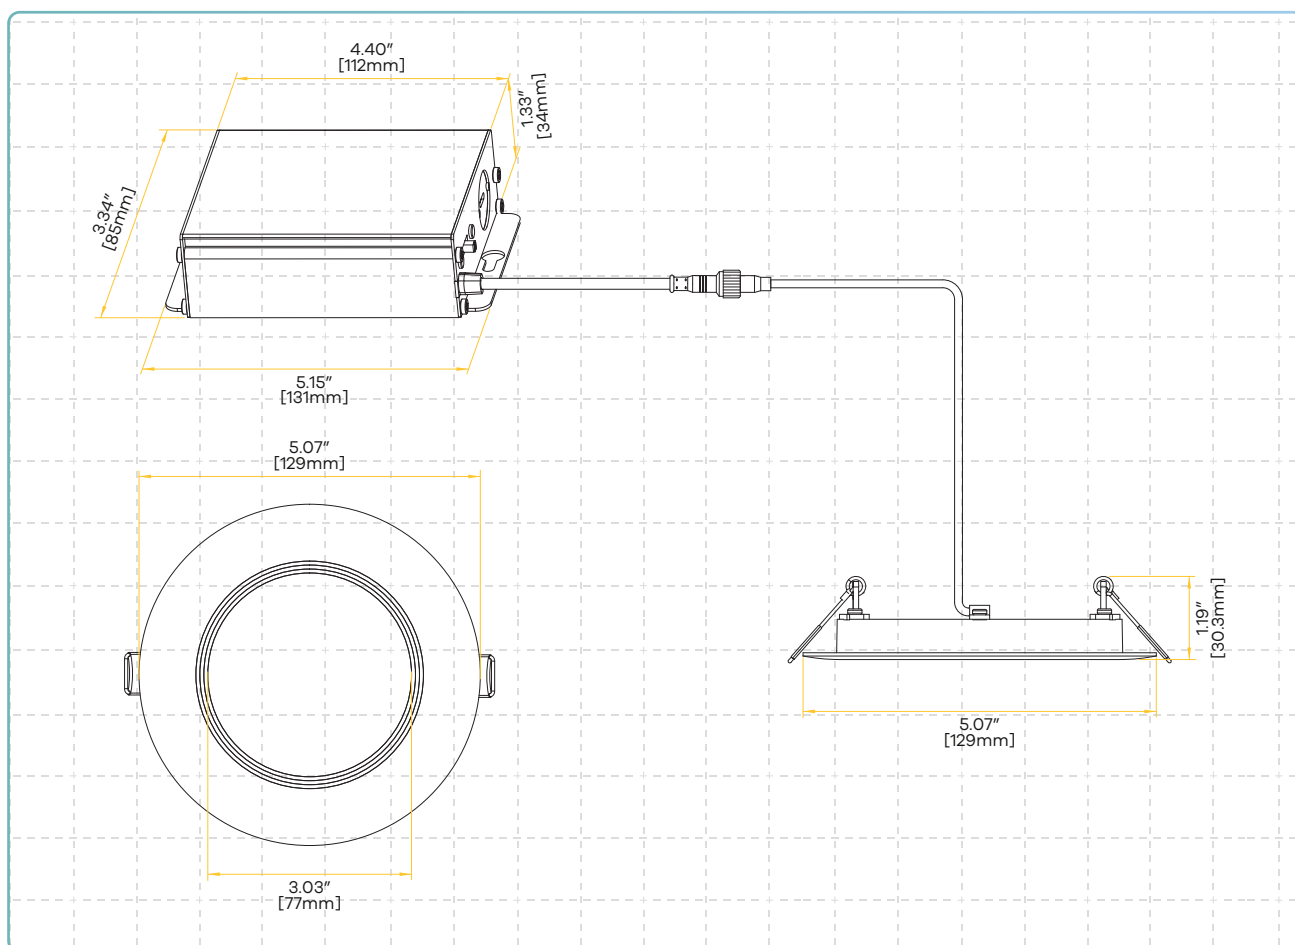

Dimmer List

Brand	Load	Model
LUTRON	150W	LECL-153P
		CTCL-150H
		LGCL-153PLH
		CTCL-153P
		SCL-153P
		PD-6WCL
		PD-5NE
		DVCL-153P
		TGCL-153P
		AYCL-153P
		MSCL-OP153M
		STCL-153M
		DVRF-6L
	250W	PD-10NXD
		DVCL253
		DVRP-253
		MRF2S-6CL
	300W	DVELV-300P
		SELVB-300P
	600W	MACL-153M
		MRF2-600M
		DVLV603
		MA-600

Brand	Load	Model
LEVITON	150W	IPL06
		6672
		6674
		RDL06-10Z
		RNL06-10Z
	300W	DSL06-1LZ
PASS & SEYMOUR	250W	D26HD
		LSCL450W
	300W	WSCL450W
		DDE06-BLZ
EATON	300W	AAL06

0-10V Dimming

Brand	Model
LUTRON	DVSTV
	DVSCTV
LEVITON	IP710-DLZ
	DS710-10Z
LEGRAND	RH4FBL3P
COOPER	SF10P