

Fabulon 4"

Square Flushed Baffled Slim

Product Information

Description	SB4/12W/SQ/LED/5CCT
Color temp	27,30, 35,41, 50k
Output lumens	1000
Beam angle	100°
Input volts	120-277V
Wattage	12W
CRI	90
Dimmable	Triac Or 0-10V
Cut out	4.25"
OD	4.92"
Height	1.22"
Pack	18



Accessories



Emergency LED Driver
 15W G-48410
 25W G-95525
 30W G-48411
 60W G-95521



Multi Light Driver
 12W G-95824




Extension Cords
 5ft G-20247
 10ft G-20248
 20ft G-19822
 30ft G-19823



New Construction Plate
 G-19975 4 Punch Out




New Construction Plate
 G-19979 4 Punch Out



New Construction Plate
 G-19969 1 Punch Out

- CRI 90+ True Colors
- Air Tight
- Wet Location
- Dimmable
- IC Rated
- 100° Beam Angle
- JA8 TITLE 24
- ETL LISTED
- FC

Dimensions

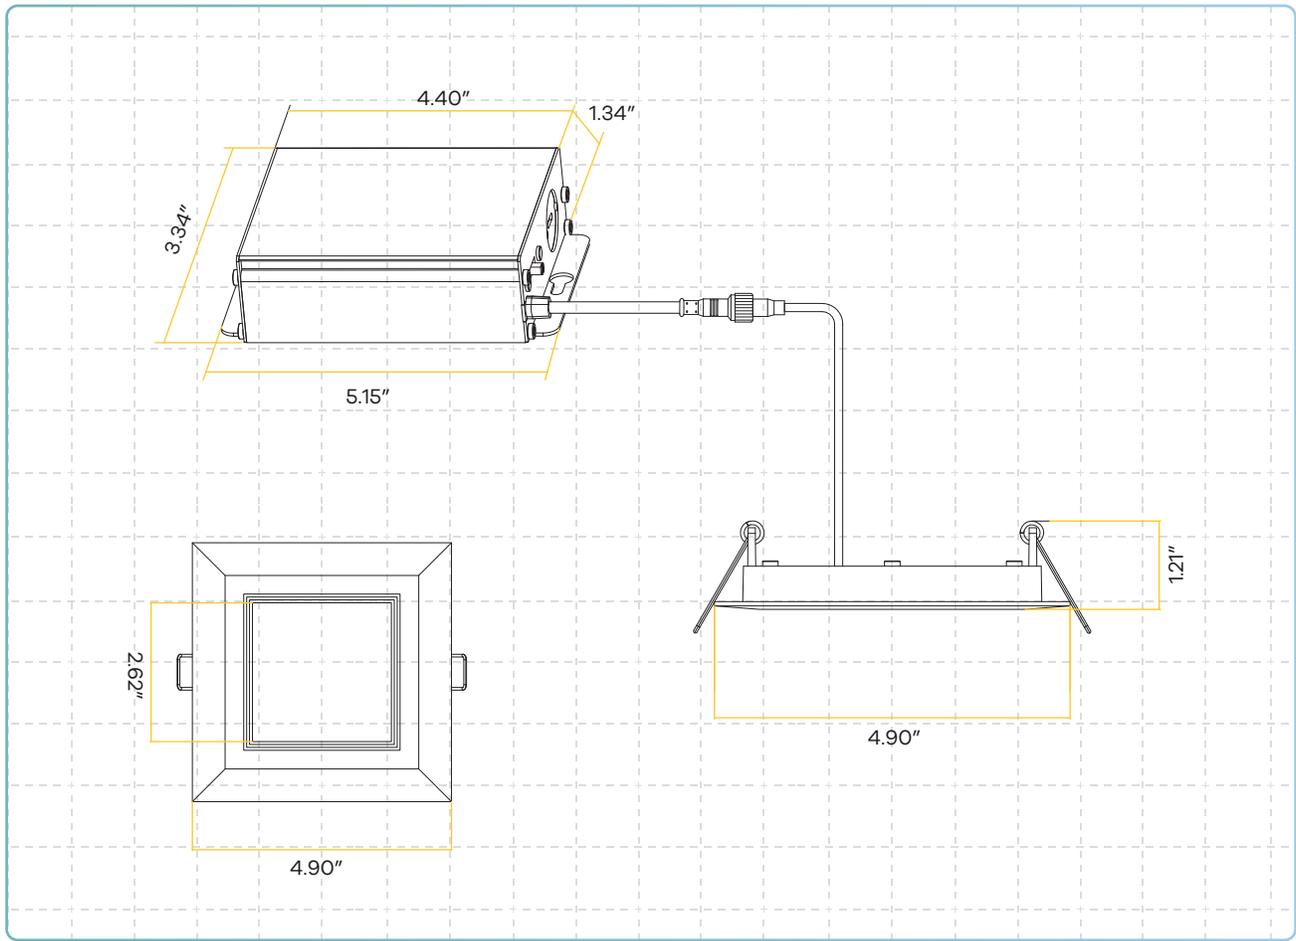

Dimmer List

Brand	Load	Model
LUTRON	150W	LECL-153P
		CTCL-150H
		LGCL-153PLH
		CTCL-153P
		SCL-153P
		PD-6WCL
		PD-5NE
		DVCL-153P
		DVRF-6L
		TGCL-153P
		AYCL-153P
		STCL-153M
		MRF2S-6CL
		MSCL-OP153M

Brand	Load	Model
LUTRON	250W	PD-10NXD
		DVCL253
		DVRP-253
	300W	CTCL-153P
		SCL-153P
		PD-6WCL
600W	PD-5NE	
	DVCL-153P	
LEVITON	150W	IPL06
		6672
EATON	300W	AAL06

0-10V Dimming

Brand	Model
LUTRON	DVSTV
	DVSCTV
LEVITON	IP710-DLZ
	DS710-10Z
LEGRAND	RH4FBL3P
COOPER	SF10P