

Fabulon 6"

Square Flushed Baffled Slim

Product Information

Description	SB6/20W/SQ/LED/5CCT
Color temp	27, 30, 35, 41, 50k
Output lumens	1800
Beam angle	100°
Input volts	120-277V
Wattage	20W
CRI	90
Dimmable	Triac Or 0-10V
Cut out	6.25"
OD	6.81"
Height	1.25"
Pack	18



Accessories



Emergency LED Driver
 25W G-95525
 30W G-48411
 60W G-95521



Multi Light Driver
 20W G-95826




Extension Cords
 5ft G-20247
 10ft G-20248
 20ft G-19822
 30ft G-19823



New Construction Plate
 G-19975 7 Punch Out




New Construction Plate
 G-19979 7 Punch Out



New Construction Plate
 G-19969 2 Punch Out

- CRI 90+ True Colors
- Air Tight
- Wet Location
- Dimmable
- IC Rated
- 100° Beam Angle
- JA8 TITLE 24
- ETL LISTED
- FC

Dimensions

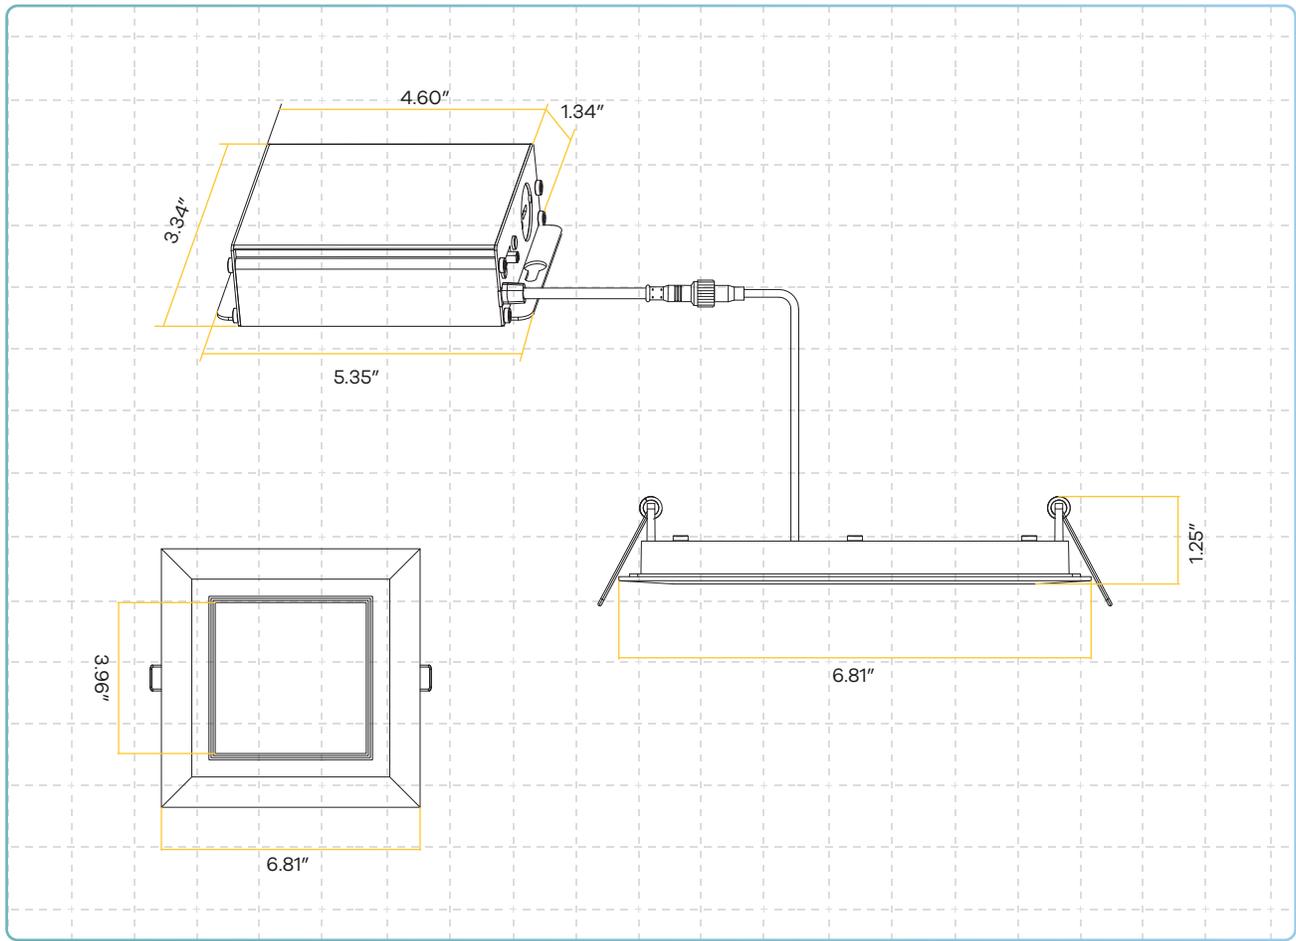

Dimmer List

Brand	Load	Model
LUTRON	150W	LECL-153P
		CTCL-150H
		LGCL-153PLH
		CTCL-153P
		SCL-153P
		PD-6WCL
		PD-5NE
		DVCL-153P
		DVRF-6L
		TGCL-153P
		AYCL-153P
		STCL-153M
		MRF2S-6CL
		MSCL-OP153M

Brand	Load	Model
LUTRON	250W	PD-10NXD
		DVCL253
		DVRP-253
	300W	CTCL-153P
		SCL-153P
		PD-6WCL
600W	PD-5NE	
	DVCL-153P	
LEVITON	150W	IPL06 6672
EATON	300W	AAL06

0-10V Dimming

Brand	Model
LUTRON	DVSTV
	DVSCTV
LEVITON	IP710-DLZ
	DS710-10Z
LEGRAND	RH4FBL3P
COOPER	SF10P