





Fabulon Round Slim



G-97822



Product Information

Description	SB4/12W/R/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Cut out	4.20"
Output lumens	1000	OD	5.07"
Beam angle	100°	Height	1.19"
Input volts	120/277V	Warranty	3 Years
Wattage	12W	Plate	G-98800 6 Punch Out
CRI	90>		G-98810 6 Punch Out
mA	270mA	Packed	18
Output volts	38V		

G-97824



Product Information

Description	SB6/20W/R/LED/5CCT	Dimmable	Triac Or 0-10V Dimming
Color temp	27, 30, 35, 41, 50k	Cut out	6.20"
Output lumens	1800	OD	7.16"
Beam angle	100°	Height	1.19"
Input volts	120/277V	Warranty	3 Years
Wattage	20W	Plate	G-98800 9 Punch Out
CRI	90>		G-98810 9 Punch Out
mA	390mA	Packed	18
Output volts	38V		

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Light Driver

12W G-95824




Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Dimensions

G-97822

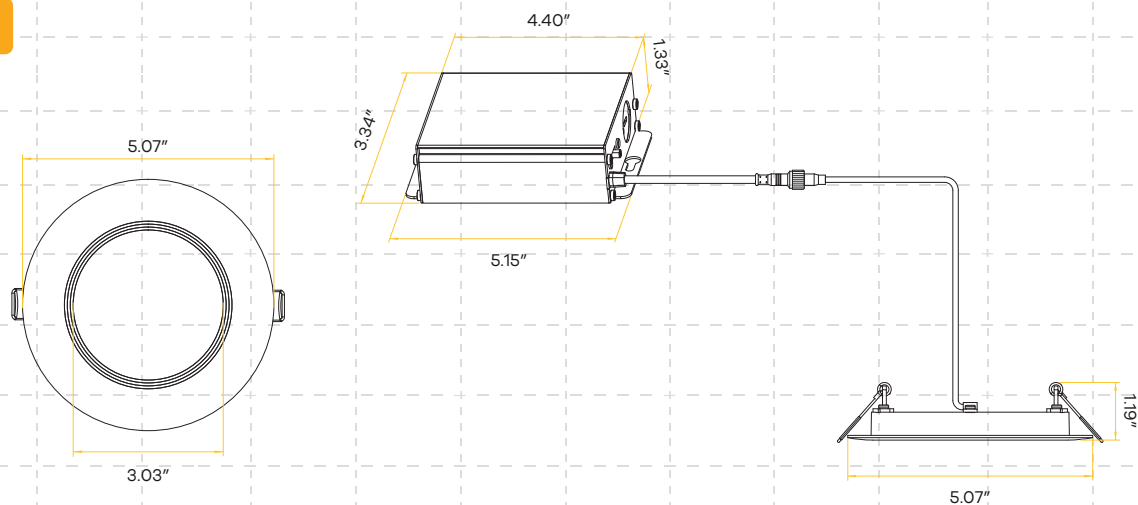

G-97824

