

Fabulon Square Slim



Selectable Color



CRI 90+ True Colors



Wet Location



Air Tight



100° Beam Angle




Dimmable



IC Rated


G-97812



Product Information

Description	SB4/12W/SQ/LED/5CCT	Cut out	4.25"
Color temp	27,30, 35,41, 50k	OD	4.92"
Output lumens	1000	Height	1.22"
Beam angle	100°	Warranty	3 Years
Input volts	120/277V	Plate	G-98800 6 Punch Out
Wattage	12W		G-98810 6 Punch Out
CRI	90>		G-19969 1 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

G-97814



Product Information

Description	SB6/20W/SQ/LED/5CCT	Cut out	6.25"
Color temp	27, 30, 35, 41, 50k	OD	6.81"
Output lumens	1800	Height	1.25"
Beam angle	100°	Warranty	3 Years
Input volts	120/277V	Plate	G-98800 9 Punch Out
Wattage	20W		G-98810 9 Punch Out
CRI	90>		G-19969 2 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Light Driver

12W G-95824




Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Dimensions

G-97812

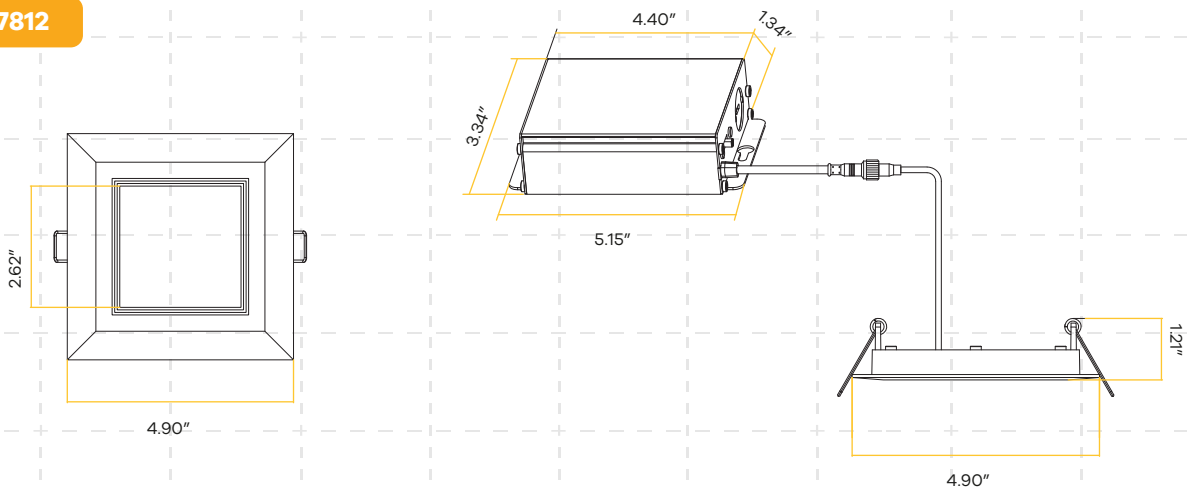

G-97814

