Fire Rated 4"
Round Regress Slim

Product Information

Description	RS4/14W/R/LED/5CCT FR
Color temp	27, 30, 35, 41, 50k
Output lumens	1000
Beam angle	100°
Input volts	120/277V
Wattage	14W
CRI	90>
Dimmable	Triac or 0-10V
Cut out	4.30″
OD	5.04″
Height	2.91″
Wire	FT6 Plenum rated
Fire rated	2 hours
Packed	18

G-20251

5 Selectable Color



Tested to Comply With UL 263 & ASTM E119


Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521




Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823



New Construction Plate
G-98800 6 punch out



New Construction Plate
G-98810 6 punch out




New Construction Plate
G-19982 4 punch out


CRI 90+ True Colors | Wet Location | Air Tight | Dimmable | IC Rated | Fire Rated 2 Hours | JA8 TITLE 24

Made In China
Goodlite Products. Tinton Falls NJ 07753.


Dimensions

G-20251

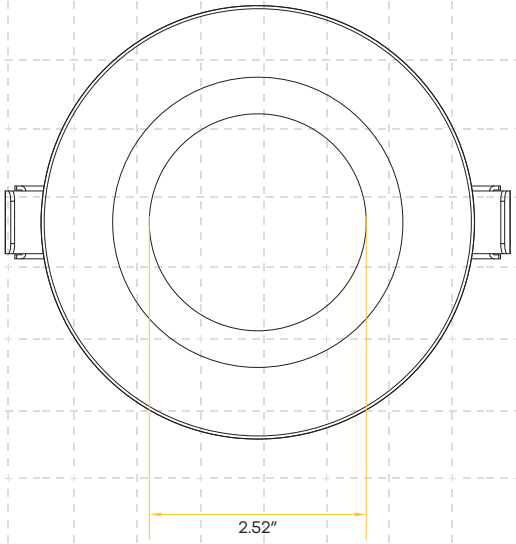

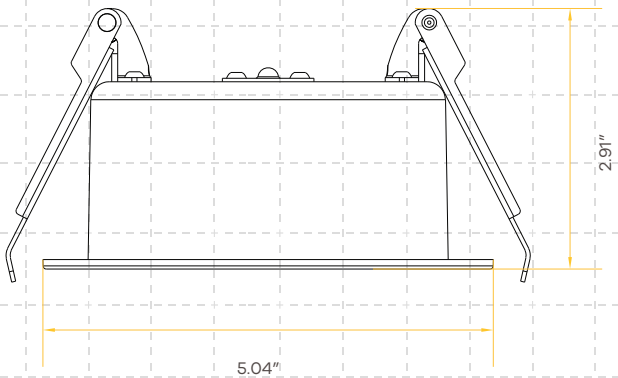

Driver Dimensions

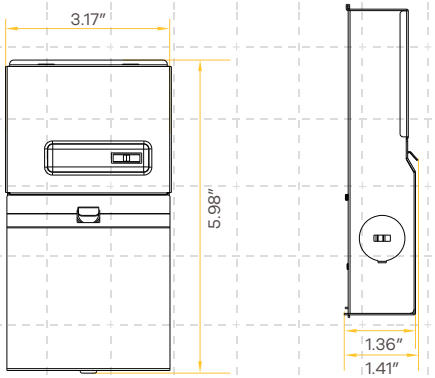

Dimmer List

Brand	Series	Model	Load
LUTRON	SKYLARK CONTOUR	LGCL-153P	150W
		CTCL-153PDH-WH	150W
	CASETA	PD-6WCL	150W
	DIVA	TGCL-153PH-WH DVCL-153PR-WH	150W
	TOGGLER		150W
LEVITON	MAESTRO	MACL-153MH-WH	600W
	ILLUMATECH	R50-IPL06-10M	150W
	SURESLIDE	R12-06672-ILW	150W
		R62-06674-POW	150W
EATON	Slide Dimmer	SAL06P-LA-K	300W