

Fire Rated 5" Square Flushed Slim

Product Information

Description	S5/15W/SQ/LED/5CCT FR
Color temp	27, 30, 35, 41, 50k
Output lumens	1200
Beam angle	100°
Input volts	120/277V
Wattage	15W
CRI	90>
mA	350mA
Output volts	33-38V
Dimmable	Triac Or 0-10V Dimming
Cut out	5.10"
OD	5.70"
Height	1.67"
Wire	FT6 Plenum rated
Certified	UL 263 & ASTM E119
Packed	18



Additional Sizes

- 3 Inch
- 4 Inch
- 6 Inch

Color Cover Options

- Black**
 G-48391
- Brushed Nickel**
 G-48392
- Bronze**
 G-48393
- Brushed Brass**
 G-48399

- CRI 90+ True Colors
- Wet Location
- Air Tight
- Dimmable
- IC Rated
- Fire Rated
- JA8 TITLE 24
- ETL US
- FC

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Light Driver

18W G-95825



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823



New Construction Plate

G-19975 6 Punch Out



New Construction Plate


G-19979 6 Punch Out



New Construction Plate

G-19981 3 Punch Out

Dimensions

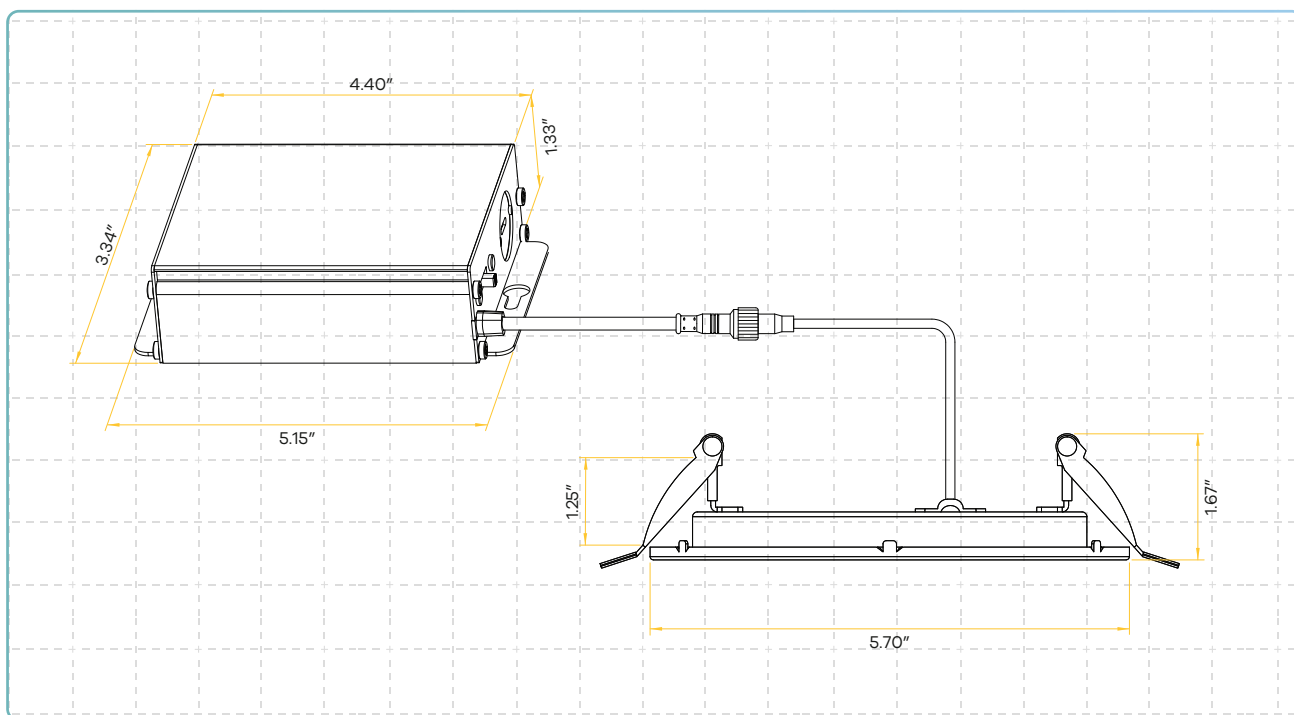

Dimmer List

Brand	Series	Model	Load	Brand	Series	Model	Load
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W			6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	1064	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W