Fire Rated
Round Flushed Slim

Certified to Comply With UL 263 & ASTM E119

- Selectable Color
- CRI 90+ True Colors
- Wet Location
- Air Tight
- Dimmable
- IC Rated
- Fire Rated 2 Hours

3″

G-96921



Product Information

Description	S3/8W/R/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	2.85″
Output lumens	600	OD	3.70″
Beam angle	100°	Height	1.67″
Input volts	120/277V	Warranty	3 Years
Wattage	8W	Certified	UL 263 & ASTM E119
CRI	90>	Fire rated	2 hours
mA	190mA	Plate	G-98800 4 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

Color Covers G-96921

Black G-48370 T3/R/CV/BK	Bronze G-48372 T3/R/CV/BZ	Brushed Nickel G-48371 T3/R/CV/BN	Brushed Brass G-48382 T3/R/CV/BB	Red G-23730 T3/R/CV/RD
Orange G-23731 T3/R/CV/OG	Yellow G-23732 T3/R/CV/YL	Green G-23733 T3/R/CV/GN	Blue G-23734 T3/R/CV/BLU	Rose Blush G-23735 T3/R/CV/ROSE

Made In China
Goodlite Products. Tinton Falls NJ 07753.

4″

G-96922



Product Information

Description	S4/12W/R/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	3.90″
Output lumens	925	OD	4.72″
Beam angle	100°	Height	1.67″
Input volts	120/277V	Warranty	3 Years
Wattage	12W	Certified	UL 263 & ASTM E119
CRI	90>	Fire rated	2 hours
mA	270mA	Plate	G-98800 6 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

Color Covers G-96922



Black
G-48373
T4/R/CV/BK



Bronze
G-48375
T4/R/CV/BZ



Brushed Nickel
G-48374
T4/R/CV/BN



Brushed Brass
G-48383
T4/R/CV/BB



Red
G-23740
T4/R/CV/RD



Orange
G-23741
T4/R/CV/OG



Yellow
G-23742
T4/R/CV/YL



Green
G-23743
T4/R/CV/GN



Blue
G-23744
T4/R/CV/BLU



Rose Blush
G-23745
T4/R/CV/ROSE

5″

G-96923



Product Information

Description	S5/15W/R/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	4.90″
Output lumens	1200	OD	5.90″
Beam angle	100°	Height	1.67″
Input volts	120/277V	Warranty	3 Years
Wattage	15W	Certified	UL 263 & ASTM E119
CRI	90>	Fire rated	2 hours
mA	350mA	Plate	G-98800 8 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

Color Covers G-96923



Black
G-48376
T5/R/CV/BK



Bronze
G-48378
T5/R/CV/BZ



Brushed Nickel
G-48377
T5/R/CV/BN



Brushed Brass
G-48384
T5/R/CV/BB



Red
G-23750
T5/R/CV/RD



Orange
G-23751
T5/R/CV/OG



Yellow
G-23752
T5/R/CV/YL



Green
G-23753
T5/R/CV/GN



Blue
G-23754
T5/R/CV/BLU



Rose Blush
G-23755
T5/R/CV/ROSE

6″

G-96924



Product Information

Description	S6/18W/R/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	6.10″
Output lumens	1600	OD	7.16″
Beam angle	100°	Height	1.67″
Input volts	120/277V	Warranty	3 Years
Wattage	18W	Certified	UL 263 & ASTM E119
CRI	90>	Fire rated	2 hours
mA	430mA	Plate	G-98800 9 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

Color Covers G-96924



Black
G-48379
T6/R/CV/BK



Bronze
G-48381
T6/R/CV/BZ



Brushed Nickel
G-48380
T6/R/CV/BN



Brushed Brass
G-48408
T6/R/CV/BB



Red
G-23760
T6/R/CV/RD



Orange
G-23761
T6/R/CV/OG



Yellow
G-23762
T6/R/CV/YL



Green
G-23763
T6/R/CV/GN



Blue
G-23764
T6/R/CV/BLU



Rose Blush
G-23765
T6/R/CV/ROSE

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
For G-96921 use 8W G-95823
For G-96922 use 12W G-95824
For G-96923 use 14W G-95825
For G-96924 use 18W G-95825




Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.


Made In China
Goodlite Products. Tinton Falls NJ 07753.

Dimensions

G-96922

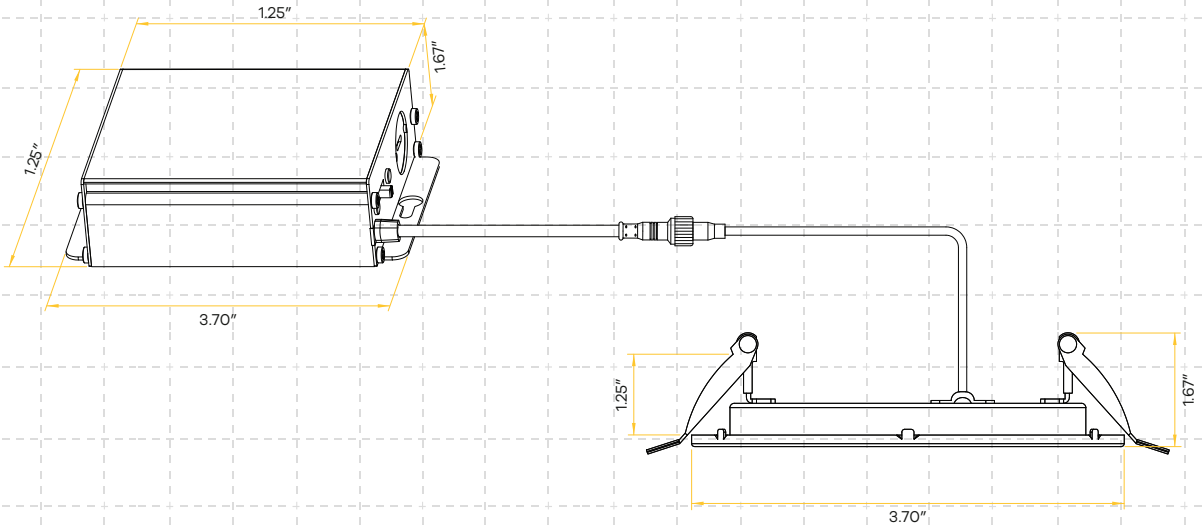


G-96922

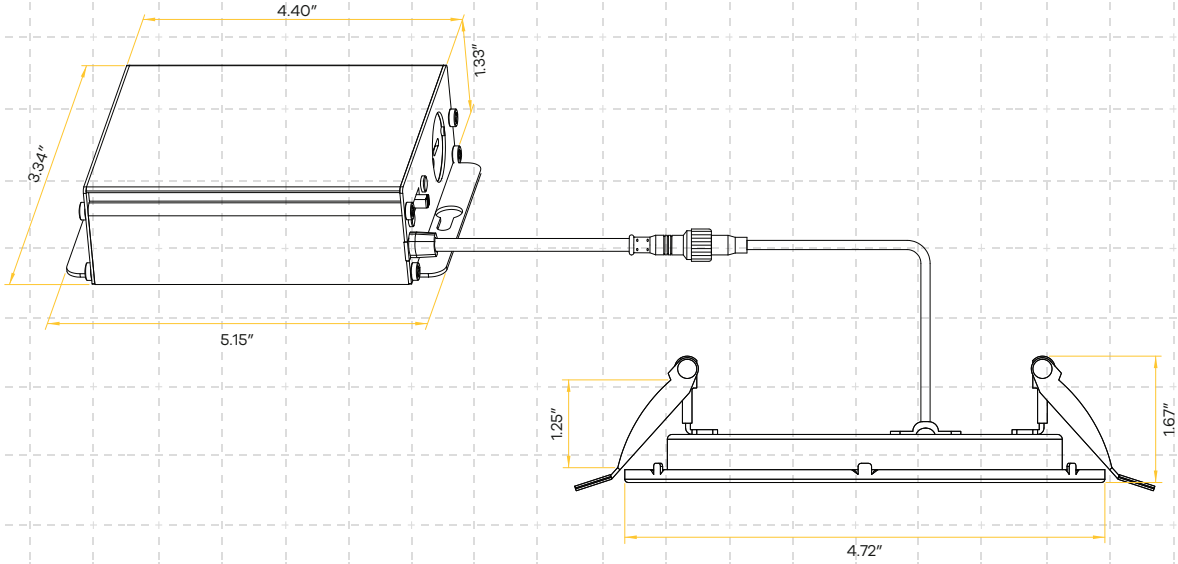


Dimensions

G-96923

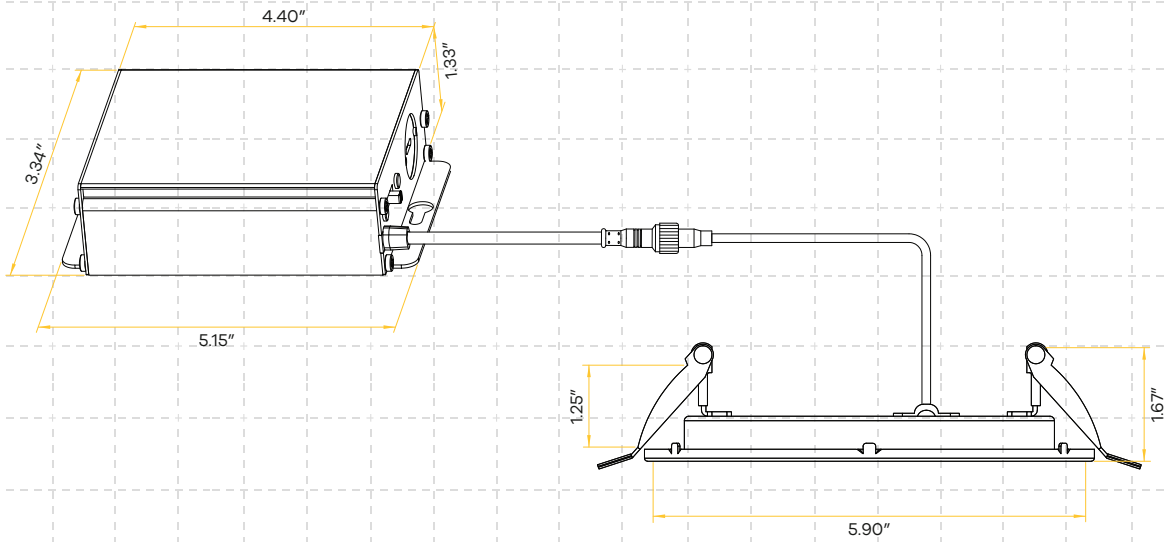

G-96924

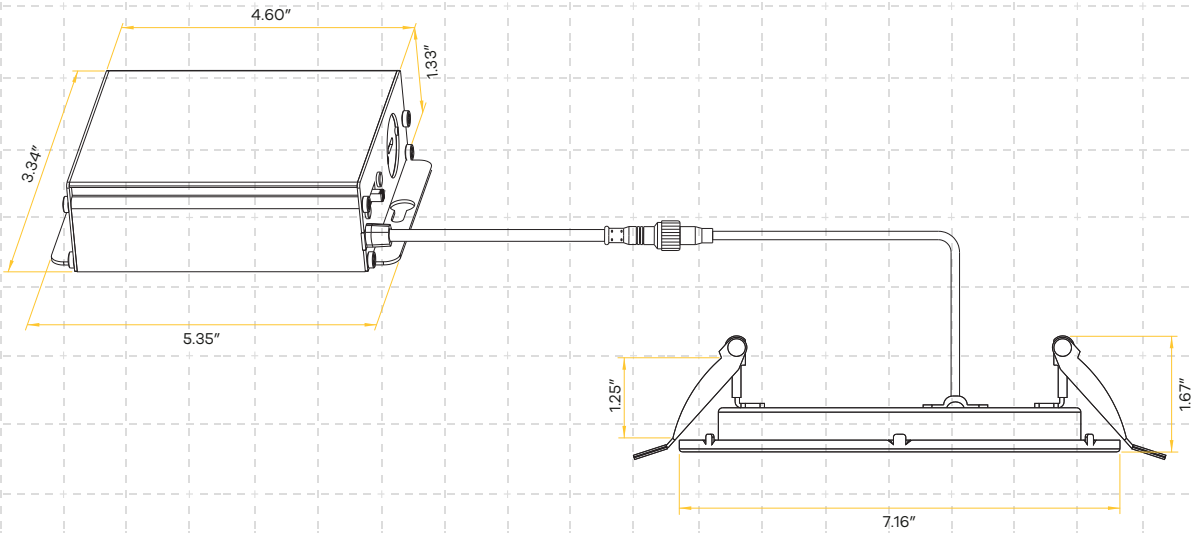

Made In China
Goodlite Products. Tinton Falls NJ 07753.