Fire Rated
Round Regress Slim

Tested to Comply With UL 263 & ASTM E119

- Selectable Color
- CRI 90+ True Colors
- Wet Location
- Air Tight
- 100° Beam Angle
- Dimmable
- IC Rated
- Fire Rated 2 Hours

4"

G-20251




Product Information

Description	RS4/14W/R/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	4.30"
Output lumens	1000	OD	5.04"
Beam angle	100°	Height	2.91"
Input volts	120/277V	Warranty	3 Years
Wattage	14W	Plate	G-19969 1 punch out
CRI	90>	Fire rated	2 hours
Dimmable	Triac or 0-10V	Packed	18

6"

G-20253

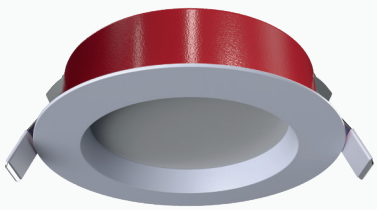

Product Information

Description	S6/18W/R/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	6.30"
Output lumens	1350	OD	7.00"
Beam angle	100°	Height	2.91"
Input volts	120/277V	Warranty	3 Years
Wattage	18W	Plate	G-98800 9 punch out
CRI	90>	Fire rated	2 hours
Dimmable	Triac or 0-10V	Packed	18

Made In China
Goodlite Products. Tinton Falls NJ 07753.

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521




Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823


Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Dimensions

G-20251

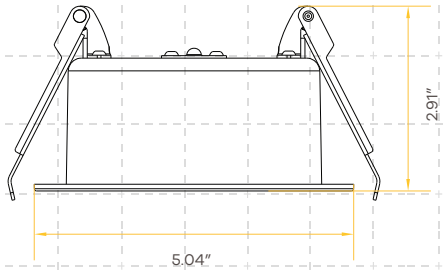

G-20253

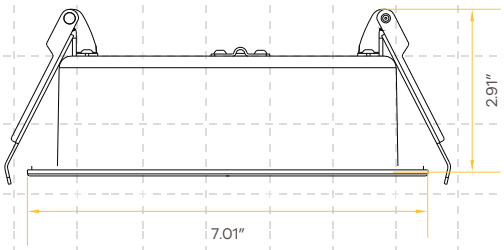

Driver Dimensions

