Fire Rated
Square Flushed Slim

Certified to Comply With UL 263 & ASTM E119

Selectable Color | CRI 90+ True Colors | Wet Location | Air Tight | Dimmable

IC Rated | Fire Rated 2 Hours

3″

G-97021



Product Information

Description	S3/8W/SQ/LED/5CCT FR	**Plenum rated**	FT6
Color temp	27, 30, 35, 41, 50k	**Cut out**	2.85″
Output lumens	550	**OD**	3.50″
Beam angle	100°	**Height**	1.67″
Input volts	120/277V	**Warranty**	3 Years
Wattage	8W	**Certified**	UL 263 & ASTM E119
CRI	90>	**Fire rated**	2 hours
mA	190mA	**Plate**	G-98800 4 Punch Out
Dimmable	Triac Or 0-10V Dimming	**Packed**	18

Color Covers G-97021



Black
G-48385
T3/R/CV/BK



Bronze
G-48387
T3/R/CV/BZ



Brushed Nickel
G-48386
T3/R/CV/BN



Brushed Brass
G-48397
T3/R/CV/BB

Made In China
Goodlite Products. Tinton Falls NJ 07753.

4″

G-97022



Product Information

Description	S4/12W/SQ/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	3.95″
Output lumens	850	OD	4.92"
Beam angle	100°	Height	1.67″
Input volts	120/277V	Warranty	3 Years
Wattage	12W	Certified	UL 263 & ASTM E119
CRI	90>	Fire rated	2 hours
mA	270mA	Plate	G-98800 6 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

Color Covers G-97022




Black
G-48388
T4/R/CV/BK



Bronze
G-48390
T4/R/CV/BZ



Brushed Nickel
G-48389
T4/R/CV/BN



Brushed Brass
G-48398
T4/R/CV/BB

5″

G-97023



Product Information

Description	S5/15W/SQ/LED/5CCT FR	Plenum rated	FT6
Color temp	27, 30, 35, 41, 50k	Cut out	5.10″
Output lumens	1200	OD	5.70″
Beam angle	100°	Height	1.67″
Input volts	120/277V	Warranty	3 Years
Wattage	15W	Certified	UL 263 & ASTM E119
CRI	90>	Fire rated	2 hours
mA	350mA	Plate	G-98800 8 Punch Out
Dimmable	Triac Or 0-10V Dimming	Packed	18

Color Covers G-97023



Black
G-48391
T5/R/CV/BK



Bronze
G-48393
T5/R/CV/BZ



Brushed Nickel
G-48392
T5/R/CV/BN



Brushed Brass
G-48399
T5/R/CV/BB

6″

G-97024



Product Information

Description	S6/18W/SQ/LED/5CCT FR	**Plenum rated**	FT6
Color temp	27, 30, 35, 41, 50k	**Cut out**	6.10″
Output lumens	1600	**OD**	6.81″
Beam angle	100°	**Height**	1.67″
Input volts	120/277V	**Warranty**	3 Years
Wattage	18W	**Certified**	UL 263 & ASTM E119
CRI	90>	**Fire rated**	2 hours
mA	430mA	**Plate**	G-98800 9 Punch Out
Dimmable	Triac Or 0-10V Dimming	**Packed**	18

Color Covers G-97024



Black
G-48394
T6/R/CV/BK



Bronze
G-48396
T6/R/CV/BZ



Brushed Nickel
G-48395
T6/R/CV/BN



Brushed Brass
G-48409
T6/R/CV/BB

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
For G-97021 use 8W G-95823
For G-97022 use 12W G-95824
For G-97023 / G-97024
use 18W G-95825




Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.


Made In China
Goodlite Products. Tinton Falls NJ 07753.

Dimensions

G-97021

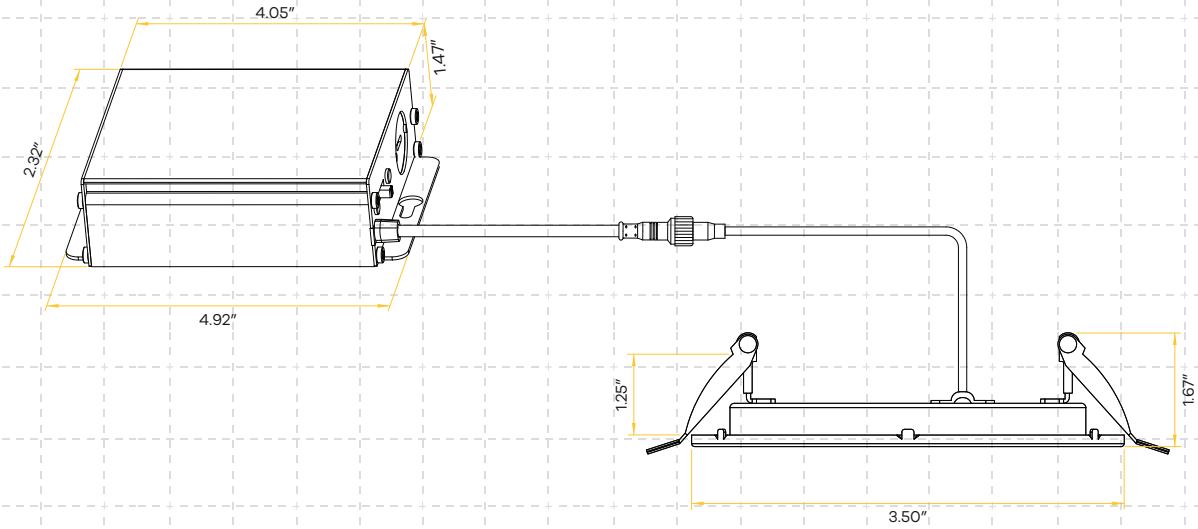


G-97022

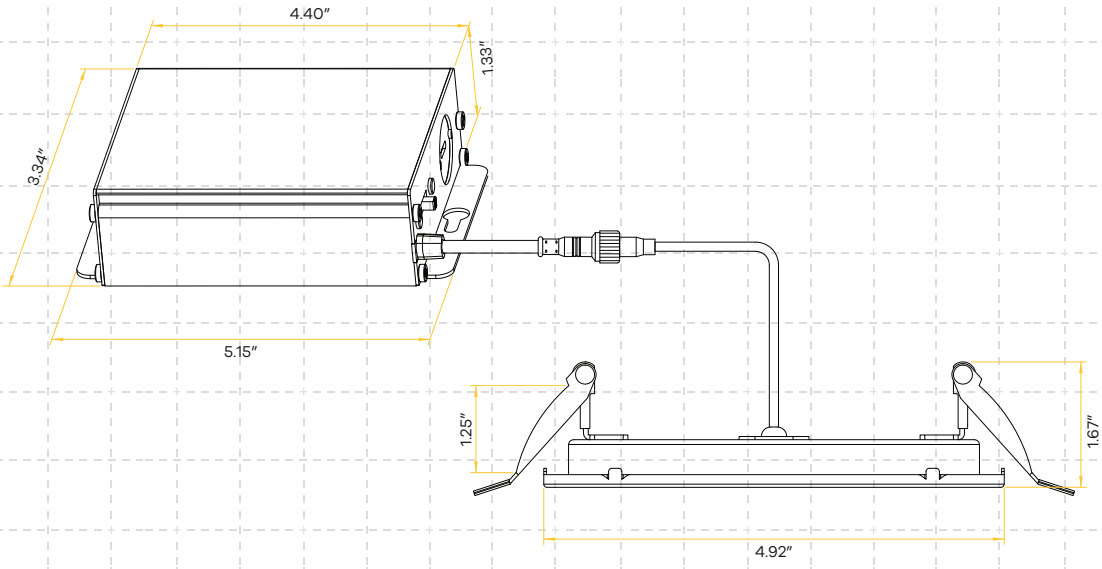


Dimensions

G-97023

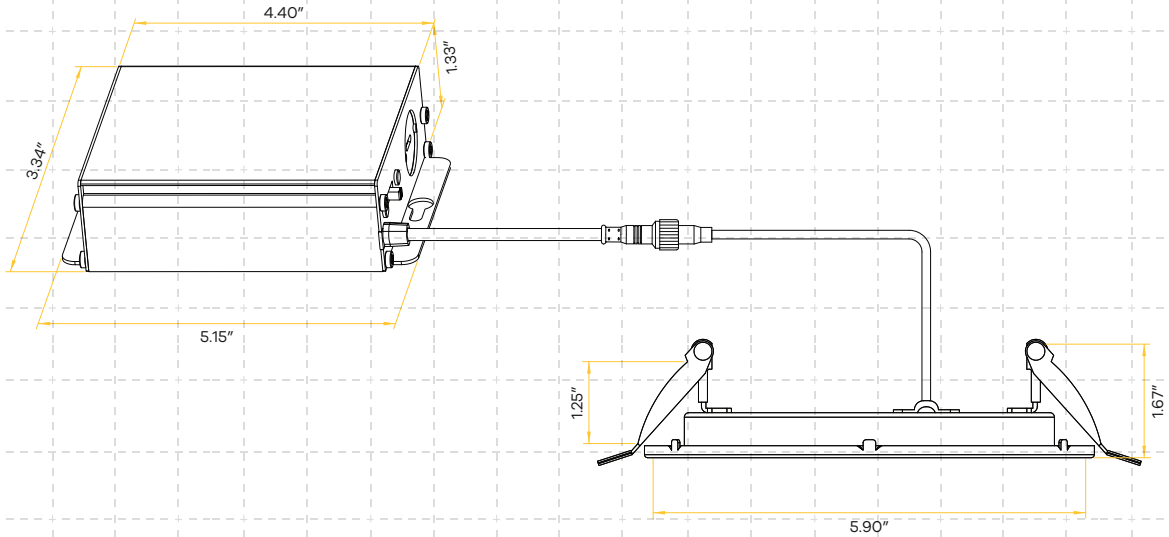

G-97024

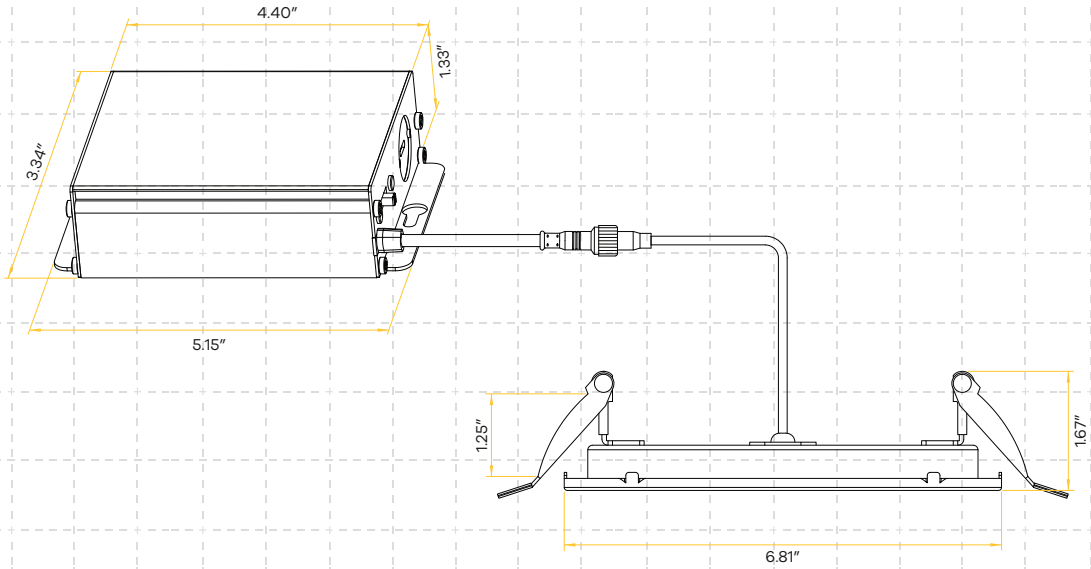

Made In China
Goodlite Products. Tinton Falls NJ 07753.