

Flarion 3.5"



Selectable Color



CRI 90+ True Colors



Wet Location




Air Tight



Changing Lens



Dimmable



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V Dimming
Fixture	Round	Plenum rated	FT6
Output lumens	850	Cut out	3.65"
Beam angle	40° (Default)	OD	4.25"
Input volts	120/277V	Height	1.64"
Wattage	10W	Wire space	7.2 Sq inch
CRI	90>	Warranty	5 years
mA	230mA	Plate	G-98800 5 Punch Out
Output volts	33-38V	Packed	18

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Single head	Plenum rated	FT6
Output lumens	850	Cut out	3.65"
Beam angle	40° (Default)	OD	4.25"
Input volts	120/277V	Height	1.66"
Wattage	10W	Wire space	7.2 sq inch
CRI	90>	Warranty	5 years
mA	230mA	Plate	G-98800 5 Punch Out
Output volts	33-38V	Packed	18

G-01020

FL/3.5/10W/G/5CCT/WH

White

G-01120

FL/3.5/10W/G/5CCT/BK

Black

G-01021

FL/3.5/10W/G/M1/5CCT/WH

White

G-01121

FL/3.5/10W/G/M1/5CCT/BK

Black



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Double head	Plenum rated	FT6
Output lumens	1600	Cut out	3.65" X 7.60"
Beam angle	40° (Default)	OD	4.25" X 8.50"
Input volts	120/277V	Height	1.66"
Wattage	20W	Wire space	10.9 sq inch
CRI	90>	Warranty	5 years
mA	495mA	Plate	G-98822 1 Punch Out
Output volts	33-38V	Packed	18

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Triple head	Plenum rated	FT6
Output lumens	2400	Cut out	3.65" X 11.85"
Beam angle	40° (Default)	OD	4.25" X 12.75"
Input volts	120/277V	Height	1.66"
Wattage	27W	Wire space	14 sq inch
CRI	90>	Warranty	5 years
mA	720mA	Plate	G-98822 3 Punch Out
Output volts	33-38V	Packed	12

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Four head	Plenum rated	FT6
Output lumens	3200	Cut out	3.65" X 16.15"
Beam angle	40° (Default)	OD	4.25" X 17"
Input volts	120/277V	Height	1.66"
Wattage	36W	Wire space	14 sq inch
CRI	90>	Warranty	5 years
mA	900mA	Plate	G-98822 5 Punch Out
Output volts	33-38V	Packed	6

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter

10W G-95824



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Lens Options

Clear Lens



G-01425
FL/L3.5/24-DEGREE



G-01426
FL/L3.5/40-DEGREE





G-01427
FL/L3.5/60-DEGREE

Dimensions



G-01020

G-01120

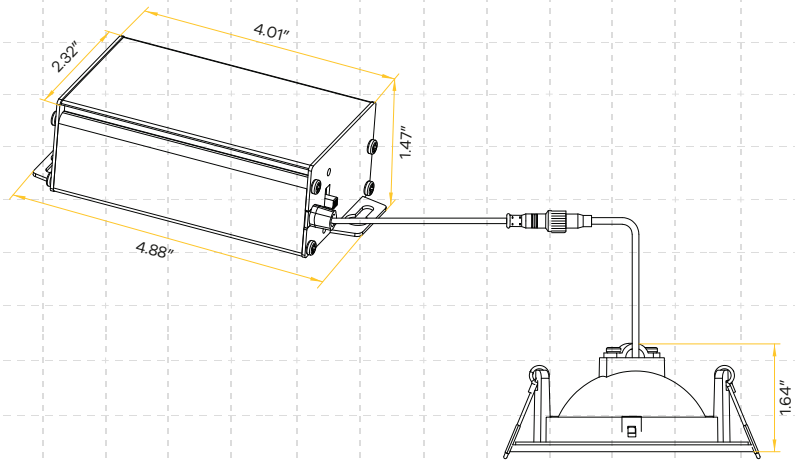




G-01021

G-01121

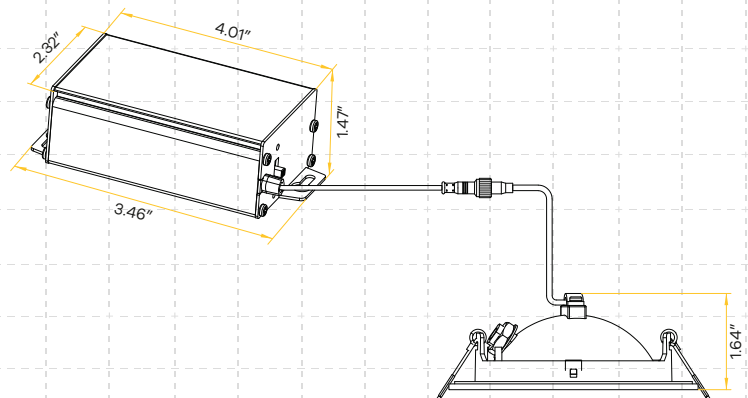




G-01022

G-01122

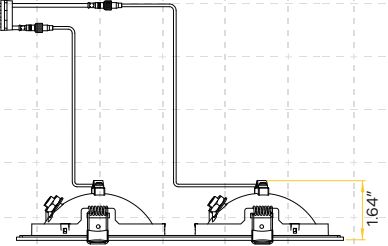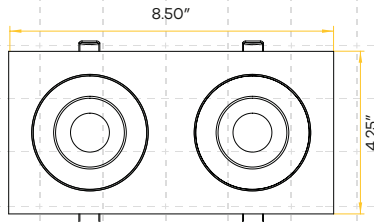

G-01023

G-01123

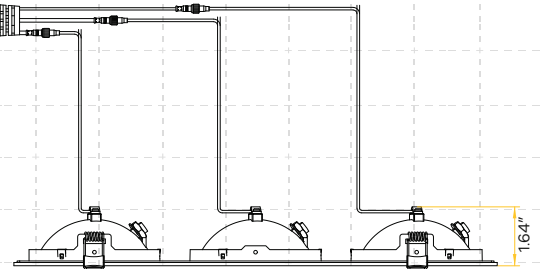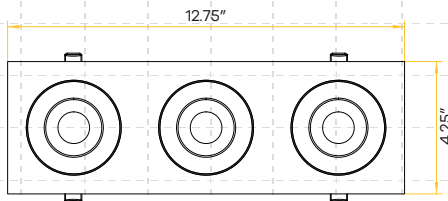

G-01024

G-01124

