


# FLARION 3.5" ROUND GIMBAL

G-01020




G-01120



| ITEM         | G-01020                   |            |                  |  | ITEM         | G-01120                   |            |                  |  |
|--------------|---------------------------|------------|------------------|--|--------------|---------------------------|------------|------------------|--|
| DESCRIPTION  | FL/3.5/10W/GR/LED/5CCT/WH | COLOR TEMP | 27,30,35,41,50k  |  | DESCRIPTION  | FL/3.5/10W/GR/LED/5CCT/BK | COLOR TEMP | 27,30,35,41,50k  |  |
| FIXTURE      | Round                     | CRI        | 90>              |  | FIXTURE      | Round                     | CRI        | 90>              |  |
| WATTAGE      | 10W                       | DIMMABLE   | Triac or 0-10    |  | WATTAGE      | 10W                       | DIMMABLE   | Triac or 0-10    |  |
| OUTPUT LUMEN | 850LM                     | BEAM ANGLE | 40° (by Default) |  | OUTPUT LUMEN | 850LM                     | BEAM ANGLE | 40° (by Default) |  |
| INPUT VOLTS  | 120-277V                  | CUTOUT     | 3.65"            |  | INPUT VOLTS  | 120-277V                  | CUTOUT     | 3.65"            |  |
| TRIM FINISH  | White                     | OD         | 4.25"            |  | TRIM FINISH  | Black                     | OD         | 4.25"            |  |
| OUTPUT VOLTS | 33-38V                    | HEIGHT     | 1.64"            |  | OUTPUT VOLTS | 33-38V                    | HEIGHT     | 1.64"            |  |
| mA           | 230mA                     | WIRE SPACE | 7.2 Sq inch      |  | mA           | 230mA                     | WIRE SPACE | 7.2 Sq inch      |  |
| PLENUM RATED | FT6                       |            |                  |  | PLENUM RATED | FT6                       |            |                  |  |

## Lens options



| ITEM        | G-01425           | G-01426           | G-01427           |
|-------------|-------------------|-------------------|-------------------|
| DESCRIPTION | FL/L3.5/24-DEGREE | FL/L3.5/40-DEGREE | FL/L3.5/60-DEGREE |



Dimmable:  
Down to 5%



Warranty:  
3 years



Accessories

Emergency LED Driver



New Construction Plate




Extension Cords



Multi Driver Converter



Diagram

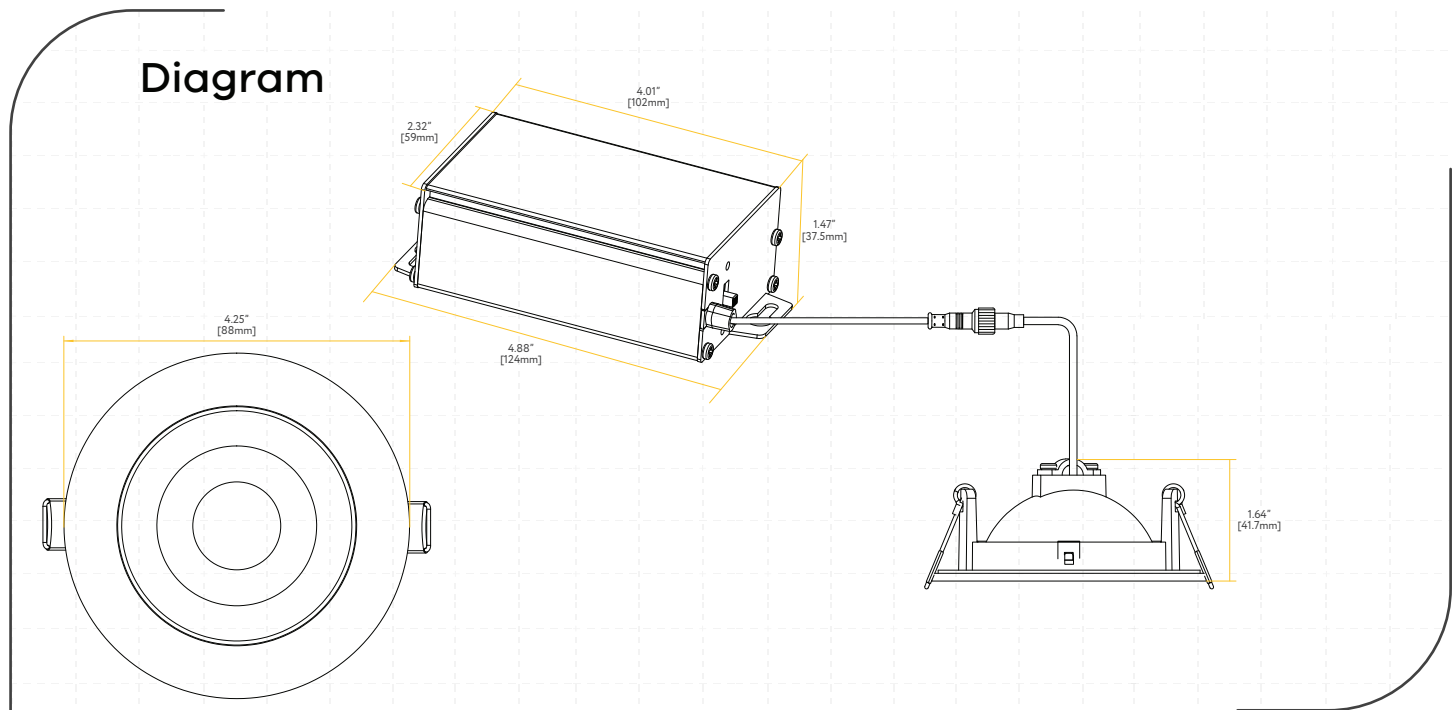

Dimmer List

| BRAND  | SERIES          | MODEL       | LOAD |
|--------|-----------------|-------------|------|
| LUTRON | SKYLARK CONTOUR | LECL-153P   | 150W |
|        |                 | CTCL-150H   | 150W |
|        |                 | LGCL-153PLH | 150W |
|        |                 | CTCL-153P   | 150W |
|        |                 | SCL-153P    | 150W |
|        |                 | S-600P      | 600W |
|        |                 | PD-6WCL     | 150W |
|        | CASETA          | PD-5NE      | 150W |
|        |                 | PD-10NXD    | 250W |
|        | DIVA            | DVCL-153P   | 150W |

| BRAND          | SERIES       | MODEL         | LOAD |
|----------------|--------------|---------------|------|
| LUTRON         | TOGGLER      | TGCL-153P     | 150W |
|                | ARIADNI      | AYCL-153P     | 150W |
|                | MAESTRO      | MACL-153M     | 600W |
| LEVITON        | ILLUMATECH   | IPL06         | 150W |
|                | SURESLIDE    | 6672          | 150W |
|                |              | 6674          | 150W |
| EATON          | SMART DIMMER | AAL06         | 300W |
| PASS & SEYMOUR | HARMONY      | DCL453PTCCCV6 | 150W |
| GE             | ROCKER       | 10464         | 150W |
|                | TOGGLE       | 18027         | 150W |