

Flarion 3"



Selectable Color



CRI 90+ True Colors



Wet Location




Air Tight



Changing Lens



Dimmable



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V Dimming
Fixture	Round	Plenum rated	FT6
Output lumens	700	Cut out	2.95"
Beam angle	40° (Default)	OD	3.47"
Input volts	120/277V	Height	1.54"
Wattage	8W	Wire space	7.2 Sq inch
CRI	90>	Warranty	5 years
mA	175mA	Plate	G-19969 0 Punch Out
Output volts	33-38V	Packed	18

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Single head	Plenum rated	FT6
Output lumens	700	Cut out	2.95"
Beam angle	40° (Default)	OD	3.47"
Input volts	120/277V	Height	1.54"
Wattage	8W	Wire space	7.2 sq inch
CRI	90>	Warranty	5 years
mA	175mA	Plate	G-19969 0 Punch Out
Output volts	33-38V	Packed	18

G-00820

FL/3/8W/G/5CCT/WH

White

G-00920

FL/3/8W/G/5CCT/BK

Black

G-00821

FL/3/8W/G/M1/5CCT/WH

White

G-00921

FL/3/8W/G/M1/5CCT/BK

Black



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Double head	Plenum rated	FT6
Output lumens	1400	Cut out	2.95" X 6.15"
Beam angle	40° (Default)	OD	3.47" X 6.81"
Input volts	120/277V	Height	1.54"
Wattage	15W	Wire space	10.4 sq inch
CRI	90>	Warranty	5 years
mA	355mA	Plate	G-98821 1 Punch Out
Output volts	33-38V	Packed	18



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Triple head	Plenum rated	FT6
Output lumens	2100	Cut out	2.95" X 9.45"
Beam angle	40° (Default)	OD	3.47" X 10.16"
Input volts	120/277V	Height	1.54"
Wattage	23W	Wire space	10.9 sq inch
CRI	90>	Warranty	5 years
mA	520mA	Plate	G-98821 3 Punch Out
Output volts	33-38V	Packed	12



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Four head	Plenum rated	FT6
Output lumens	2800	Cut out	2.95" X 13.05"
Beam angle	40° (Default)	OD	3.47" X 13.86"
Input volts	120/277V	Height	1.54"
Wattage	32W	Wire space	14 sq inch
CRI	90>	Warranty	5 years
mA	720mA	Plate	G-98821 5 Punch Out
Output volts	33-38V	Packed	6

Accessories



Emergency LED Driver
15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter
8W G-95823




Extension Cords
5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823


Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Lens Options


Clear Lens



G-01420
FL/L3/24-DEGREE



G-01421
FL/L3/40-DEGREE




G-01422
FL/L3/60-DEGREE



Dimensions

G-00820

G-00920

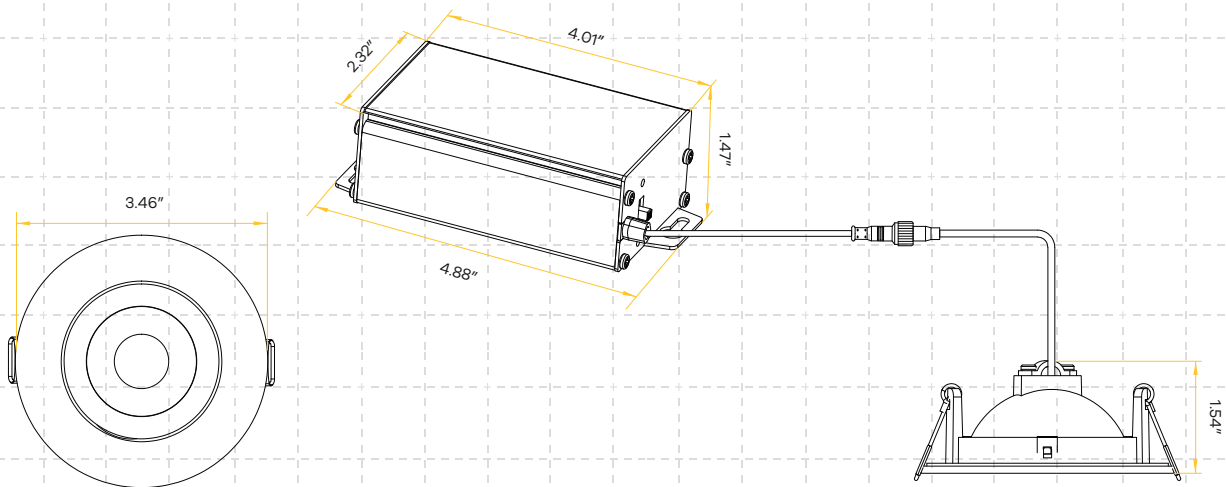


Dimensions

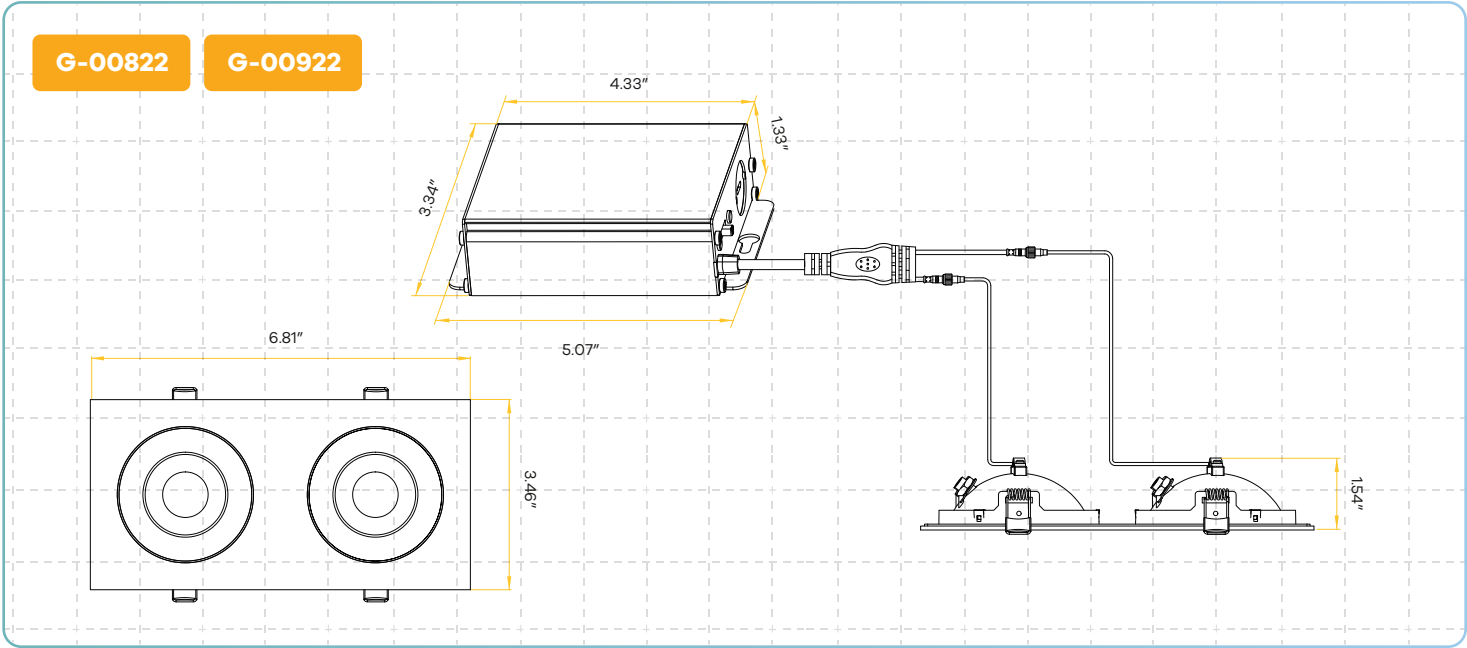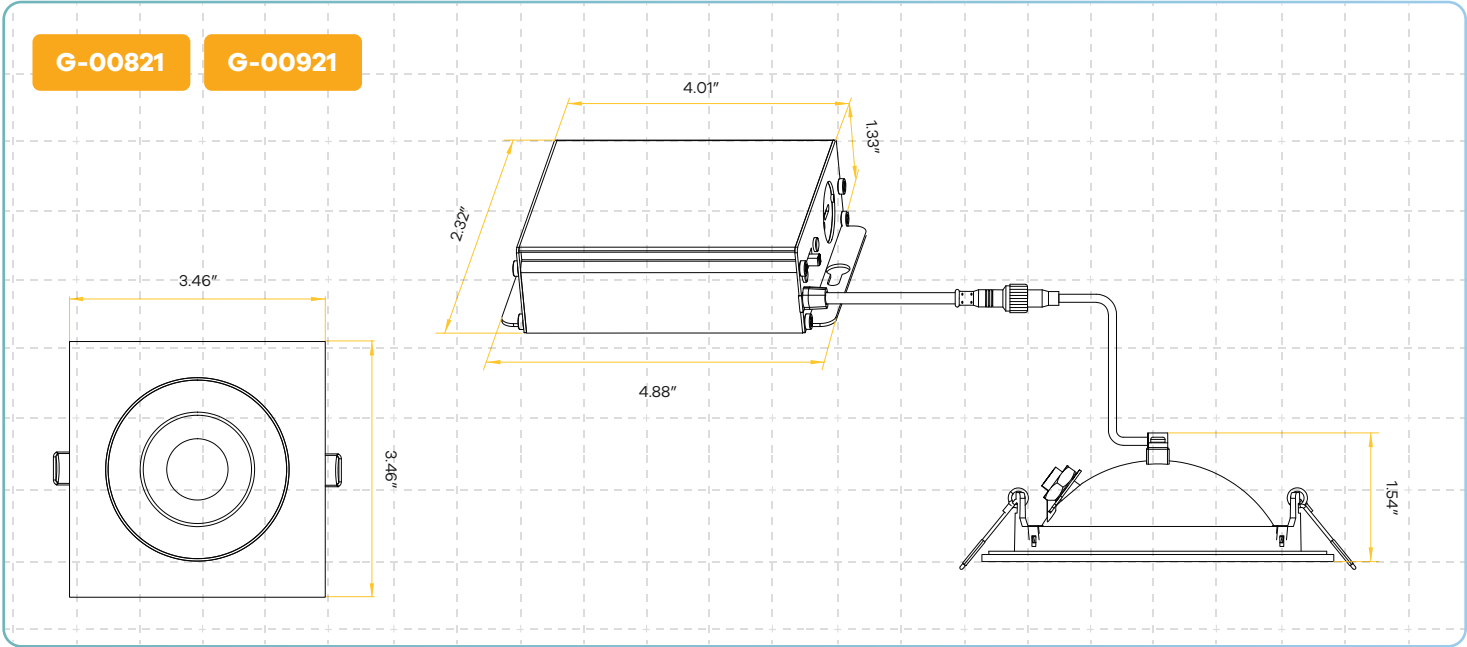

Dimensions

G-00823

G-00923

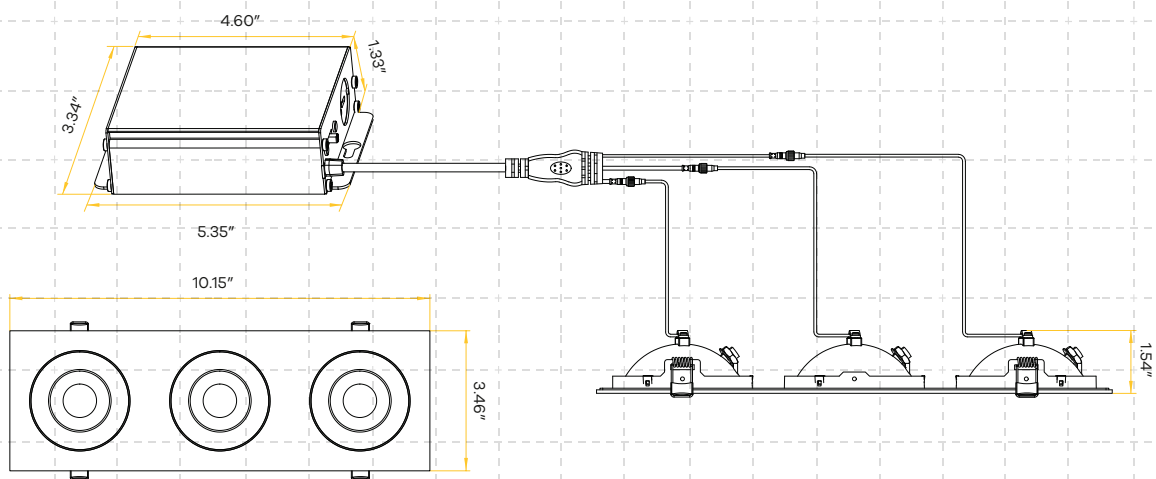

G-00824

G-00924

