

Flarion 4"



Selectable Color



CRI 90+ True Colors



Wet Location




Air Tight



Changing Lens



Dimmable



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac or 0-10V Dimming
Fixture	Round	Plenum rated	FT6
Output lumens	1200	Cut out	4.25"
Beam angle	40° (Default)	OD	4.92"
Input volts	120/277V	Height	1.81"
Wattage	13W	Wire space	10.4 Sq inch
CRI	90>	Warranty	5 years
mA	340mA	Plate	G-98800 6 Punch Out
Output volts	33-38V	Packed	18

Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Single head	Plenum rated	FT6
Output lumens	1200	Cut out	4.25"
Beam angle	40° (Default)	OD	4.92"
Input volts	120/277V	Height	1.81"
Wattage	13W	Wire space	10.4 sq inch
CRI	90>	Warranty	5 years
mA	340mA	Plate	G-98800 6 Punch Out
Output volts	33-38V	Packed	18

G-01220

FL/4/13W/G/5CCT/WH

White

G-01320

FL/4/13W/G/5CCT/WH

Black

G-01221

FL/4/13W/G/M/5CCT/WH

White

G-01321

FL/4/13W/G/M/5CCT/BK

Black



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Double head	Plenum rated	FT6
Output lumens	2400	Cut out	4.25" X 8.95"
Beam angle	40° (Default)	OD	4.92" X 9.84"
Input volts	120/277V	Height	1.81"
Wattage	26W	Wire space	14 sq inch
CRI	90>	Warranty	5 years
mA	650mA	Plate	G-98823 0 Punch Out
Output volts	33-38V	Packed	18



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Triple head	Plenum rated	FT6
Output lumens	3600	Cut out	4.25" X 13.85"
Beam angle	40° (Default)	OD	4.92" X 14.77"
Input volts	120/277V	Height	1.81"
Wattage	36W	Wire space	14 sq inch
CRI	90>	Warranty	5 years
mA	900mA	Plate	G-98823 2 Punch Out
Output volts	33-38V	Packed	12



Product Information

Color temp	27, 30, 35, 41, 50k	Dimmable	Triac Or 0-10V Dimming
Fixture	Four head	Plenum rated	FT6
Output lumens	4600	Cut out	4.25" X 18.80"
Beam angle	40° (Default)	OD	4.92" X 19.67"
Input volts	120/277V	Height	1.81"
Wattage	48W	Wire space	14 sq inch
CRI	90>	Warranty	5 years
mA	1200mA	Plate	G-98823 4 Punch Out
Output volts	33-38V	Packed	6

Accessories



Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521



Multi Driver Converter

G-01220 use 12W G-95824
G-01221 use 12W G-95824



Extension Cords

5ft G-20247
10ft G-20248
20ft G-19822
30ft G-19823

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Lens Options

Clear Lens



G-01520
FL/L4/24-DEGREE



G-01521
FL/L4/40-DEGREE





G-01522
FL/L4/60-DEGREE

Dimensions



G-01020

G-01120

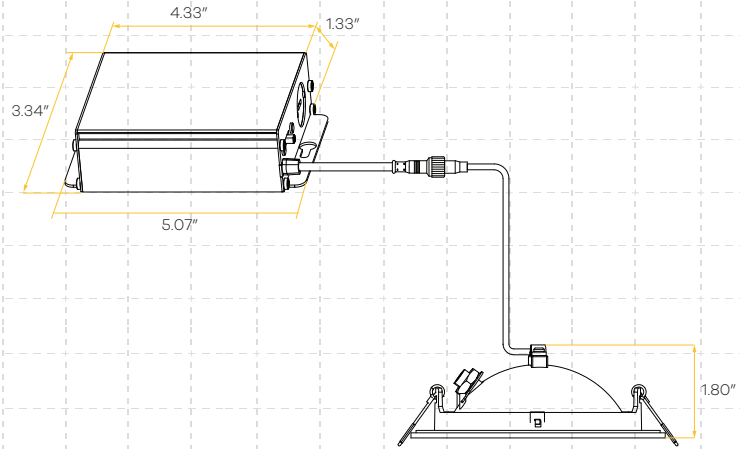


G-01021

G-01121

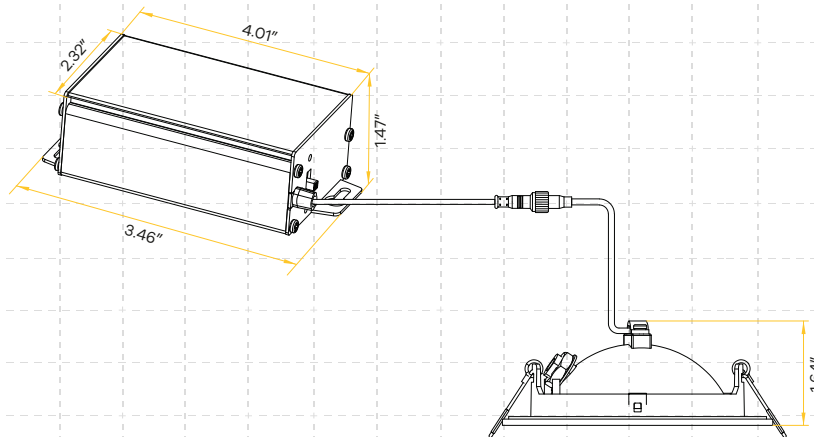


G-01022

G-01122

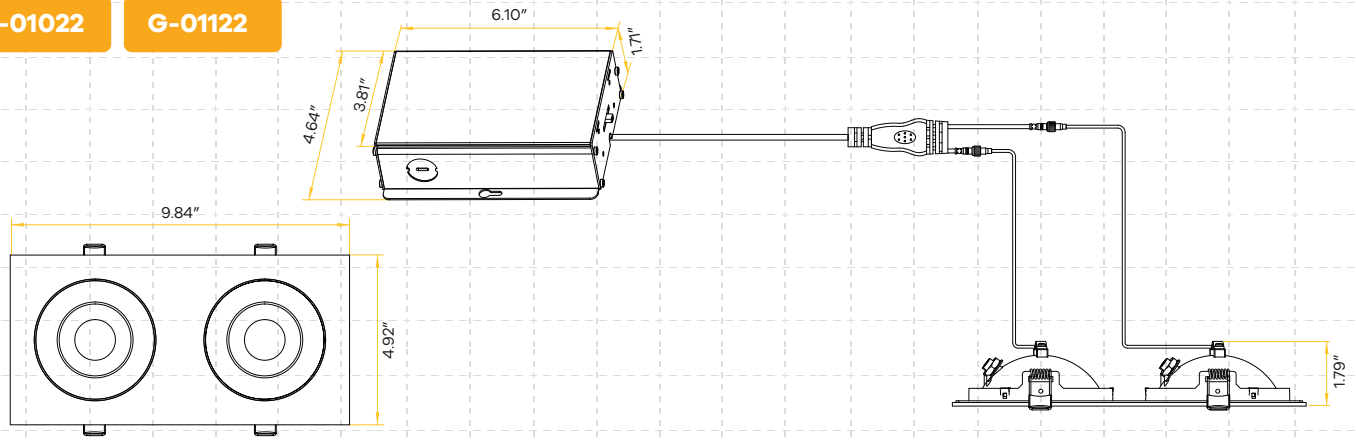

G-01023

G-01123

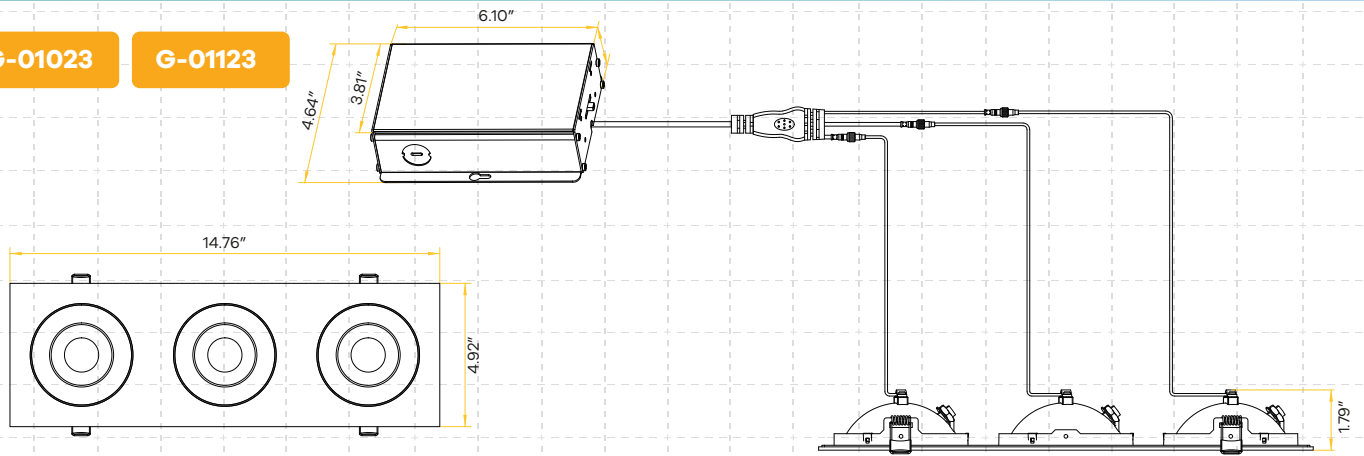

G-01024

G-01124

