


Silent Half Inch LED Diode Engine

Installation Instructions

1. Install the led diode engine into the module.

Connect the quick connector of the led diode engine and the housing well, then pushing the led diode engine into the housing collar opening. Ensure the bottom of the trim is flush with the ceiling surface.

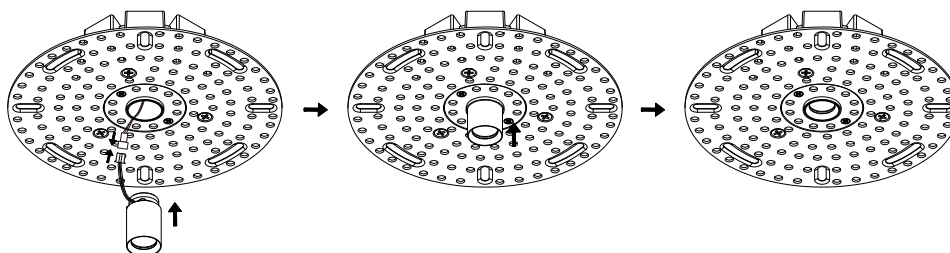

2. Replace the led diode engine.

1. Remove the module with the provided hook. (Insert the oblate head of the hook into the gap of the trim. Gently pull the led diode engine down to separate magnets and to remove it from the housing. Disconnect the wire connector to replace the led diode engine.
2. Connect the new led diode engine to the wire connector, use finger to push wire leads back to the cavity of the housing on side of the light engine receptacle. Be sure the wire leads do not tangle to block the receptacle of the light engine. Install the light engine into through the housing collar to let its base fully engaged with the magnet of the receptacle.

