

Electronic Driver

200W 24V Dimmable 5CCT Select


Product Information

Description	200W/24V/5CCT/Driver
Color temp	27, 30, 35, 40, 50K
Input volts	120/277V
Input wattage	200W
Output volts	24V
Minimum load	10%
Dimmable	ELV, MLV, Triac / Phase, 0-10V, 1-10V, Potentiometer, 10V PWM
Warranty	5 Years
Height	1.59"
Length	6.49"
Width	4.07"
Pack	20




Product Information

Output	Constant voltage	Dimming Range	0-100%
Range	120-277VAC	Application	Suitable for LED lighting
PFC Design	Built-in active PFC function	Waterproof performance	Full aluminum protection housing, for dry and damp locations.
Efficiency	Up to 94%	Protections	Short circuit / Over load / Over temperature
Heat dissipation	Free air convection	Design features	5 gears to choose the desired color temperature
Dimming function	TRIAC & 0-10V		freely. (2700K/3000K/3500K/4000K/5000K)
Min. load	10%		



Dimensions

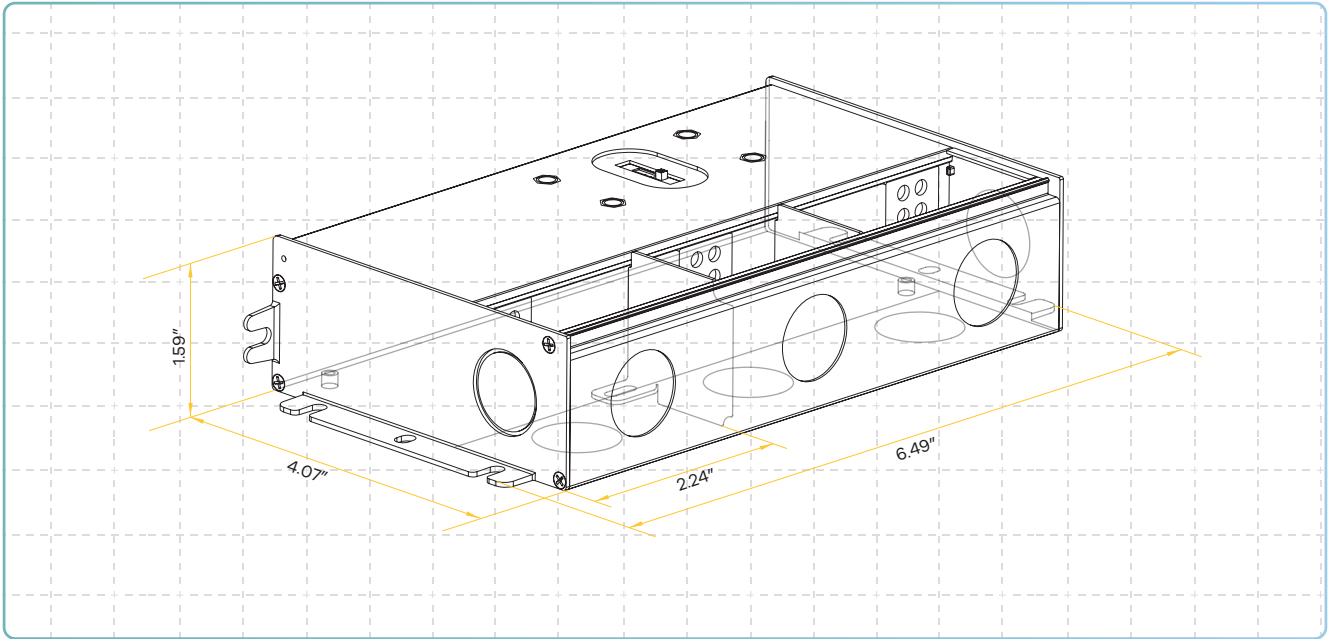

Dimmer List

Brand	Dimmer Model	Dimmer Categories	Brand	Dimmer Model	Dimmer Categories	Brand	Dimmer Model	Dimmer Categories
LUTRON	SELV-300P	TRIAC DIMMER	LUTRON	NTLV-600	TRIAC DIMMER	LIVITEN	6672-1LW	TRIAC DIMMER
	DVELV-300P-WH			CTCL-150-WH			6674-POW	
	PD-5NE			CTCL-153PDH-WH			6672-3PW	
	MRF2-6ELV-120			NTCL-250			6683	
	MA-PRO(Maestro)			DVCL-253P-WH			6681	
	ST-PRO-N(Sunnata)			DVDCL-153P			DDE06-BLZ	
	MAELV-600-WH			DVCL-153P			DDMX1-BLZ	
	NTELV-600-WH			AYCL-153P			DZ6HD	
	DVRP-253P			STCL-153M(Sunnata)			DH6HD (D26HD)	
	DVRF-5NE			MSCL-OP153M			DSL06-1LZ	
	DVRF-6L			SLV-600P-LA			RNL06-10Z	
	MRF2-600M			DVLV-600P-GR			PNL06-TW	
	MRF2S-6CL			S600P			RDL06-TW	
	MRF2S-6CL-WH			DV-600P			IPL06-10Z	
	MRF2-6ND-120			CT-103P			IPE04-1LZ	
	MRF2-6CL			MS-Z101-WH	VPI06			
	PD-6WCL-WH			DVSTV-WH(0-10)	(0-10V) DIMMER		TBL03-10W	
	PD-10NXD			RMJS-8T-DV-B				
	MALV-600			DVTV-WH	TRIAC DIMMER			
	MACL-1S3M-WH			DVELV-303P				
				MACL-LFQ				
Brand	Dimmer Model	Dimmer Categories						
EATON	DLC03P	TRIAC DIMMER						
	DUL06P-C2							
	DF 10P-C1	(0-10V) DIMMER						
LEGRAND	ADTP703TUW4	TRIAC DIMMER						
	RHL153P							
	LSCL450							