


G-98021

NEPTUNE 2'X2' CENTER BASKET FIXTURE

INSTRUCTION SHEET

CCT and Watt Changing

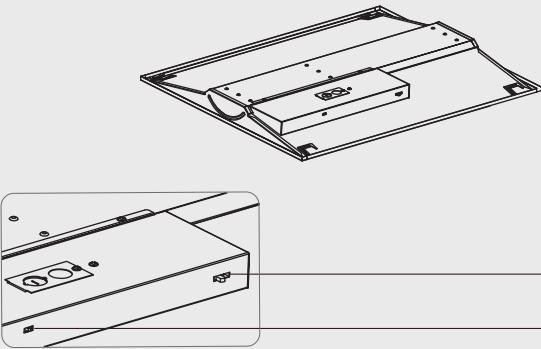

WATT


Watt Changing:
30W / 40W / 50W

CCT


CCT Changing:
3000K / 3500K / 4100K / 5000K / 6500K

A.T Grid Ceilings Installation

1. Power Leads Connection remove screw holding access cover plate and remove the necessary knockout

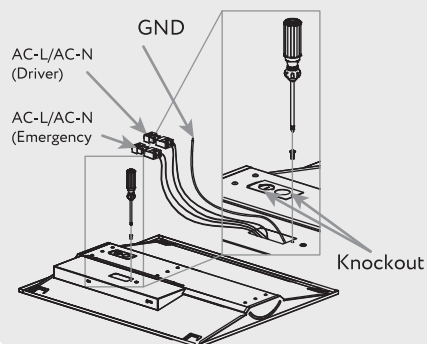


2.

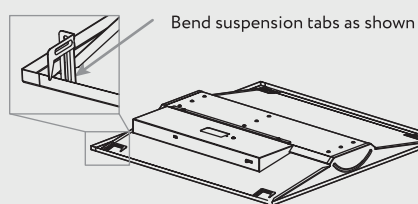


3.


3. Remove the ceiling(s) at an appropriate location where the light fixture is to be installed.

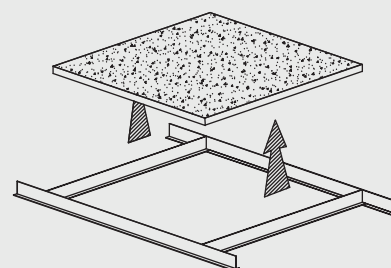

4. Set light fixture into the suspension with tabs. Hangover the T-bar as shown.

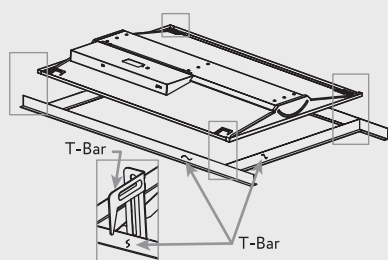

5. After securing the light fixture to the T-bar, secure the light fixture to the ceiling with aircraft cable or wires capable of supporting 100 lbs minimum.

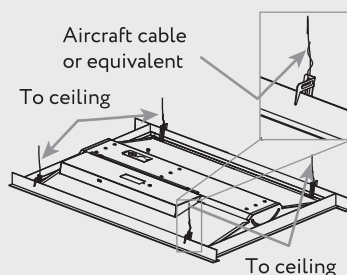

6.

