
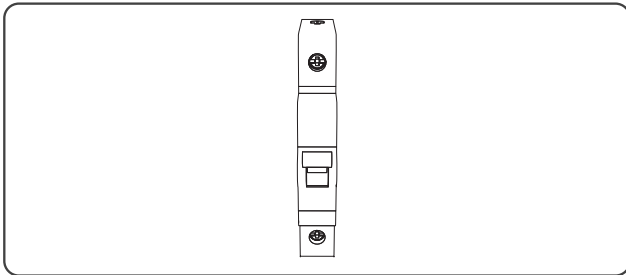



Installation Instructions

1x4, 2x2, 2x4 SURFACE MOUNT PANEL - 5CCT TEMPERATURE/WATTAGE SELECTABLE

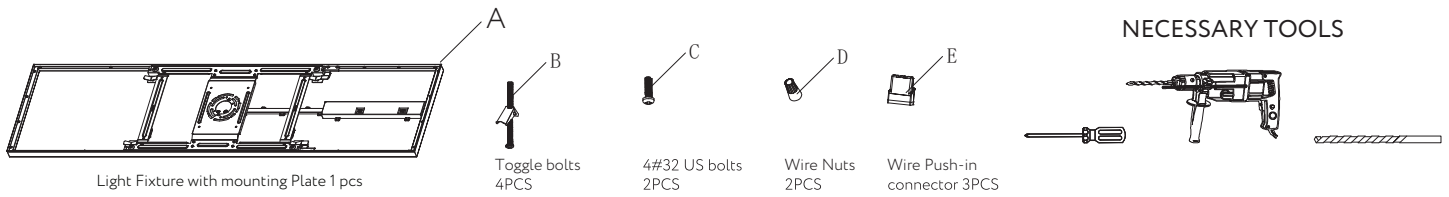


1. Shut Off Power

Turn off power at the circuit breaker.

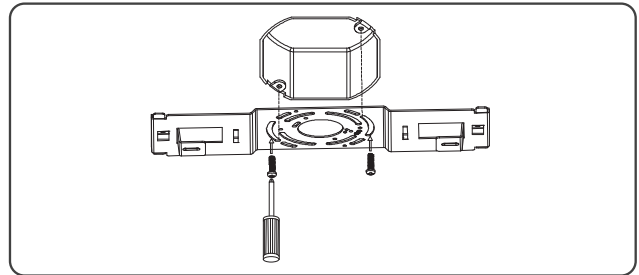


2. Attach Plate & Secure

Attach mounting plate (A) to the junction box using screws (C).

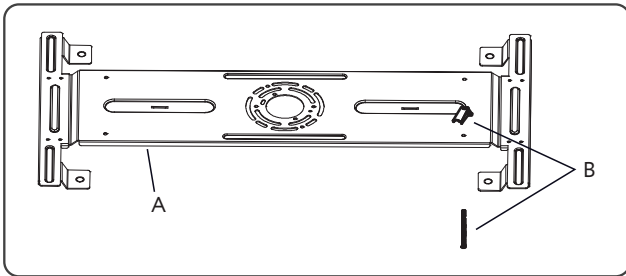


3. Mark & Drill Holes

Mark hole positions on ceiling for toggle bolts (B). Drill 1/2" holes. Attach toggle bolts (B) through mounting plate (A) and into drilled holes. Pull screws down to tighten.

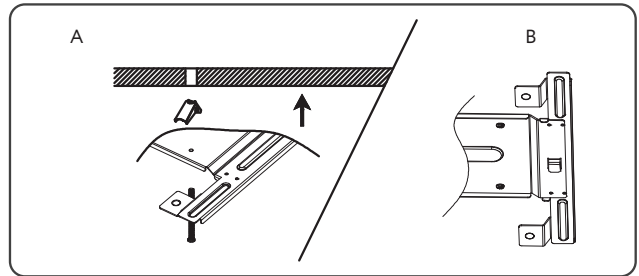


4. Reinsert Bolts

Reattach the mounting plate (A) by sliding the toggle bolts (B) into the pre-drilled holes. Once the wings of each bolt spread through, firmly pull down the center screws to tighten everything in place.

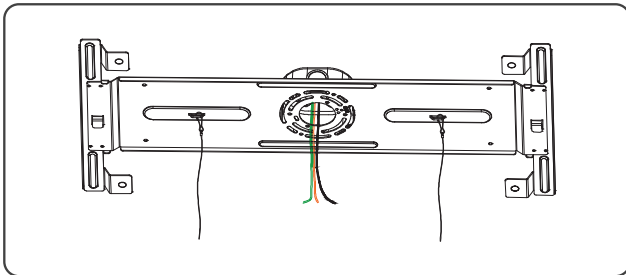


5. Thread Wires

Feed junction box wires through the mounting plate (A) hole. Connect fixture wires to junction box wires (black to hot, white to neutral, green to ground). Hook support wire to mounting plate (A).

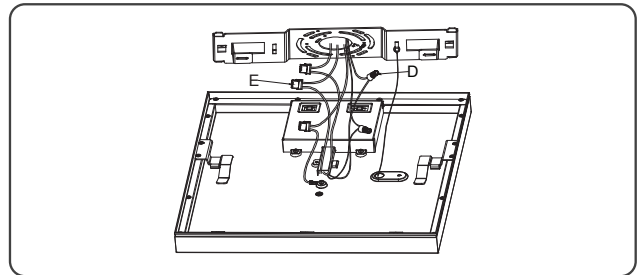


6. Connect Wires

Connect the bare copper wire to the green ground cable, and connect the other wires in the corresponding color.

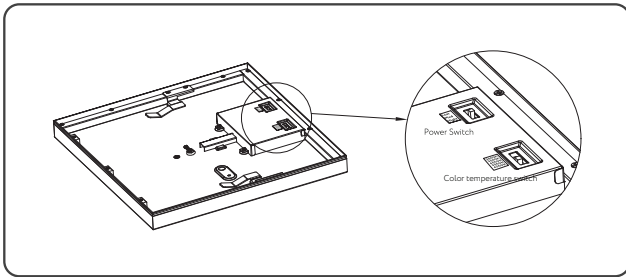


7. Set Switches

Switch the color temperature and wattage switches to the desired settings.

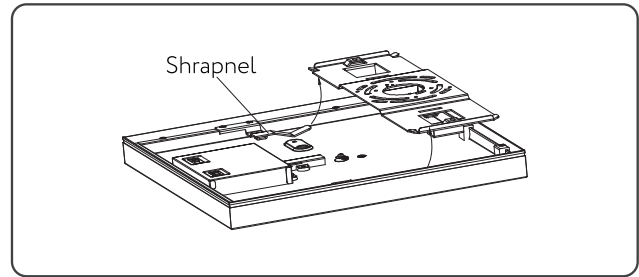


8. Align Frame

Position inner aluminum frame edges alongside mounting plate (A) flush to ceiling. Engage lamp body clips into mounting plate (A) mounting points.

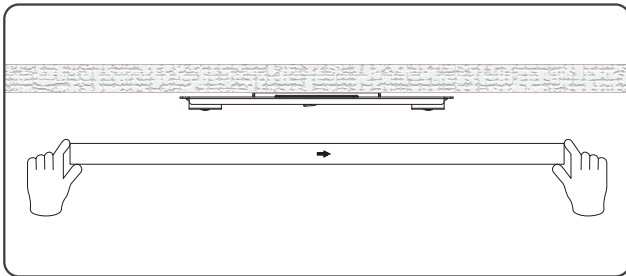

9. Engage Fixture

Align the aluminum frame alongside mounting plate (A) flush with the ceiling. Insert bracket into light, engaging shrapnel up to plate (A). Lift and secure light flush to ceiling.

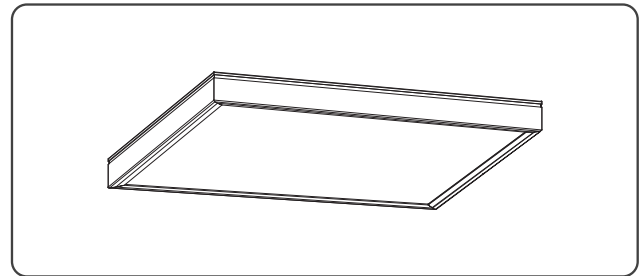

10. Restore Power

Power can now be restored at the circuit breaker. INSTALLATION COMPLETE.