


Glawre™



Selectable Color




CRI 80+ True Colors




Wet Location



Air Tight



120° Beam Angle



Dimmable



Wattage Selectable

1' x 1'

G-12020




Product Information

Description	GL/SM/1X1/20W/WS3/LED/5CCT	mA	100-500mA
Color temp	30, 35, 41, 50, 65K	Dimmable	0-10V Dimmable
Output lumens	1400/1800/2200LM	Dimensions	11.92" X 11.92"
Beam angle	120°	Height	1.06"
Input volts	120/277V	Warranty	5 years
Wattage	12/16/20W	Packed	4
CRI	80>		

1' x 2'

G-12021

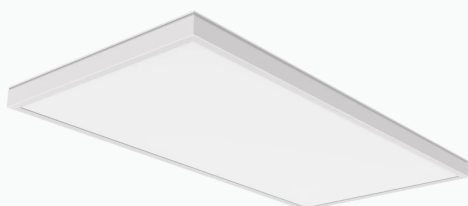

Product Information

Description	GL/SM/1X2/30W/LED/WS3/5CCT	mA	100-700mA
Color temp	30, 35, 41, 50, 65K	Dimmable	0-10V Dimmable
Output lumens	2100/2700/3300LM	Dimensions	11.92" X 23.74"
Beam angle	120°	Height	1.06"
Input volts	120/277V	Warranty	5 years
Wattage	18/24/30W	Packed	18
CRI	80>		

1' x 4'

G-12022



Product Information

Description	GL/SM/1X4/50W/LED/WS3/5CCT	mA	200-1000mA
Color temp	30, 35, 41, 50, 65K	Dimmable	0-10V Dimmable
Output lumens	3660/4720/5750LM	Dimensions	11.92" X 47.71"
Beam angle	120°	Height	1.06"
Input volts	120/277V	Warranty	5 years
Wattage	30/40/50W	Packed	2
CRI	80>		

2' x 2'**G-12023**

Product Information

Description	GL/SM/2X2/50W/LED/WS3/5CCT	mA	200-1000mA
Color temp	30, 35, 41, 50, 65K	Dimmable	0-10 Dimming
Output lumens	3660/4720/5750LM	Dimensions	23.74" X 23.74"
Beam angle	120°	Height	1.06"
Input volts	120/277V	Warranty	5 years
Wattage	30/40/50W	Packed	4
CRI	80>		

2' x 4'**G-12024**


Product Information

Description	GL/SM/2X4/62W/LED/WS3/5CCT	mA	200-1450mA
Color temp	30, 35, 41, 50, 65K	Dimmable	0-10 Dimming
Output lumens	5000/6000/7500 LM	Dimensions	23.74" X 48.03"
Beam angle	120°	Height	1.10"
Input volts	120/277V	Warranty	5 years
Wattage	40/50/62W	Packed	2
CRI	80>		

4" x 2'**G-12042**

Product Information

Description	GL/SM/4"X2'/22W/LED/5CCT	mA	200mA
Color temp	30, 35, 41, 50, 65K	Dimmable	Triac or 0-10 Dimming
Output lumens	2420LM	Dimensions	3.94" x 23.89"
Beam angle	120°	Height	1.04"
Input volts	120/277V	Warranty	3 years
Wattage	22W	Packed	10
CRI	80>		

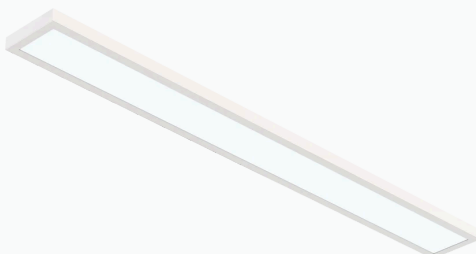4" x 3'**G-12043**


Product Information

Description	GL/SM/4"X3'/30W/LED/3WS/5CCT	mA	280mA
Color temp	30, 35, 41, 50, 65K	Dimmable	Triac or 0-10 Dimming
Output lumens	2200/2750/3300LM	Dimensions	3.94" x 35.43"
Beam angle	120°	Height	1.04"
Input volts	120/277V	Warranty	3 years
Wattage	20/25/30W	Packed	6
CRI	80>		

4" x 4'**G-12044**

Product Information

Description	GL/SM/4"X4'/40W/LED/3WS/5CCT	mA	370mA
Color temp	30, 35, 41, 50, 65K	Dimmable	Triac or 0-10 Dimming
Output lumens	2200/3300/4400LM	Dimensions	3.94" x 47.75"
Beam angle	120°	Height	1.04"
Input volts	120/277V	Warranty	3 years
Wattage	20/30/40W	Packed	6
CRI	80>		

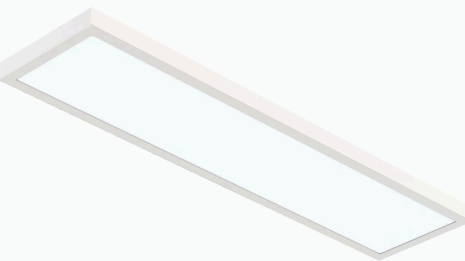6" x 2'**G-12062**

Product Information

Description	GL/SM/6"X2'/22W/LED/5CCT	mA	200mA
Color temp	30, 35, 41, 50, 65K	Dimmable	Triac or 0-10 Dimming
Output lumens	2420LM	Dimensions	5.90" x 23.89"
Beam angle	120°	Height	1.04"
Input volts	120/277V	Warranty	3 years
Wattage	22W	Packed	10
CRI	80>		

6" x 3'**G-12063**

Product Information

Description	GL/SM/6"X3'/30W/LED/3WS/5CCT	mA	280mA
Color temp	30, 35, 41, 50, 65K	Dimmable	Triac or 0-10 Dimming
Output lumens	2200/2750/3300LM	Dimensions	5.90" x 35.43"
Beam angle	120°	Height	1.04"
Input volts	120/277V	Warranty	3 years
Wattage	20/25/30W	Packed	5
CRI	80>		

6' x 4'**G-12064**

Product Information

Description	GL/SM/6"X4'/40W/LED/3WS/5CCT	mA	370mA
Color temp	30, 35, 41, 50, 65K	Dimmable	Triac or 0-10 Dimming
Output lumens	2200/3300/4400LM	Dimensions	5.90" x 47.75"
Beam angle	120°	Height	1.04"
Input volts	120/277V	Warranty	3 years
Wattage	20/30/40W	Packed	4
CRI	80>		

Accessories









Emergency LED Driver

- 15W G-48410
- 25W G-95525
- 30W G-48411
- 60W G-95521


Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Dimensions

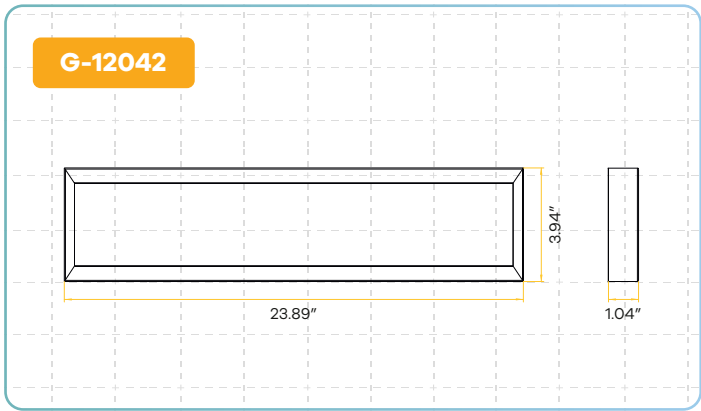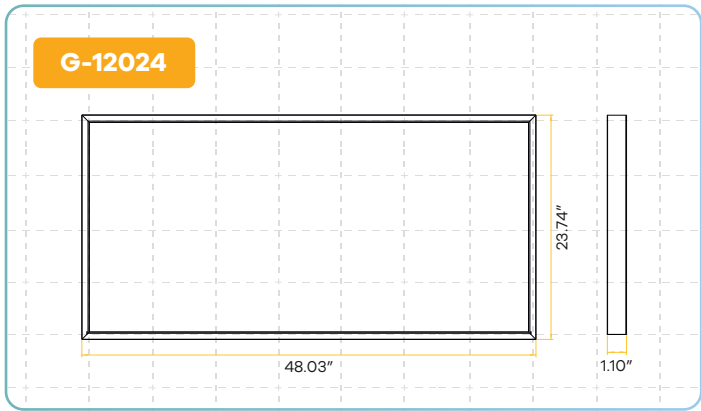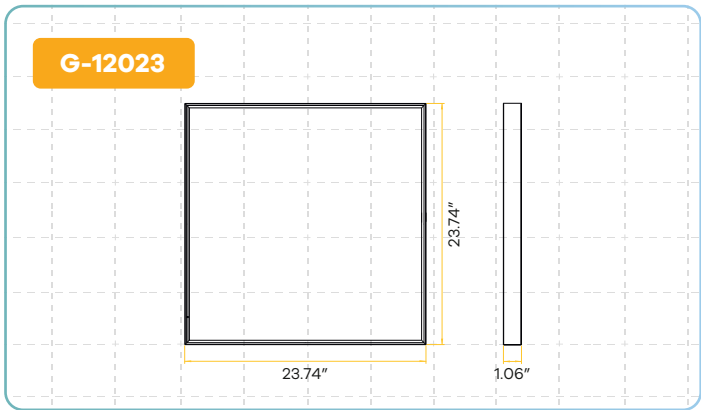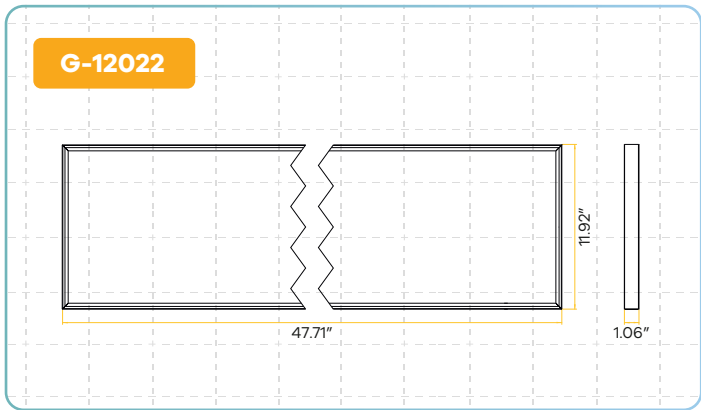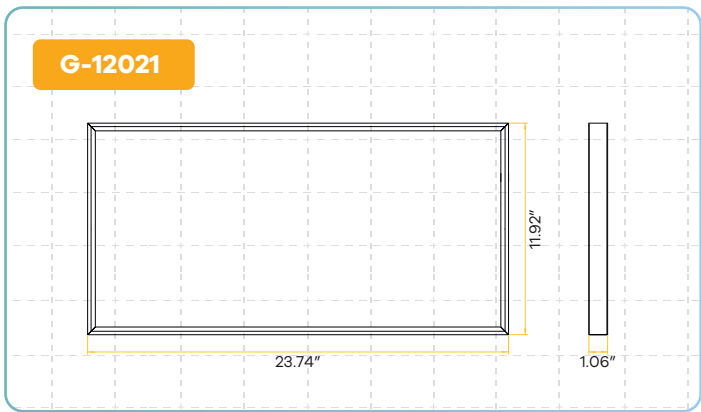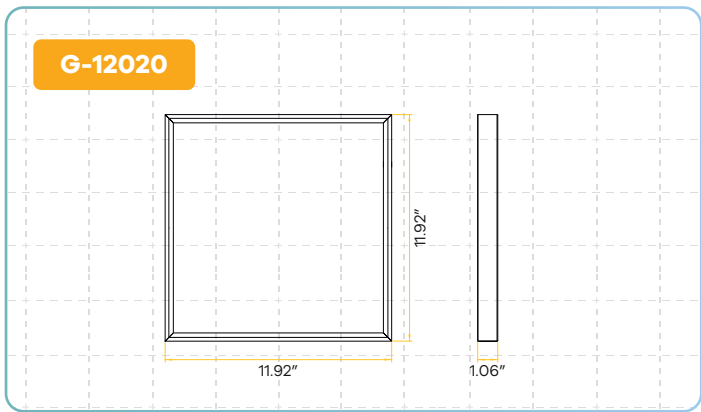


Dimensions


G-12043

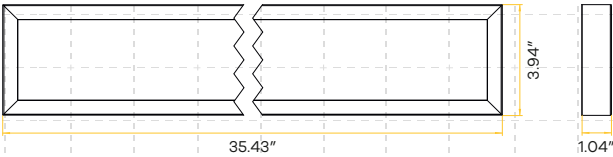


G-12044

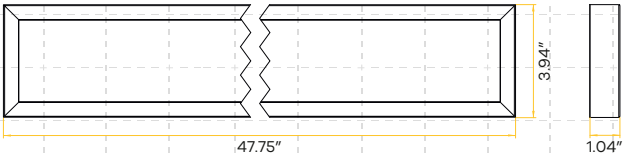

G-12062

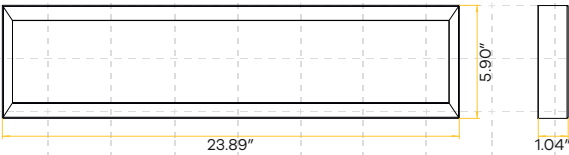

G-12063

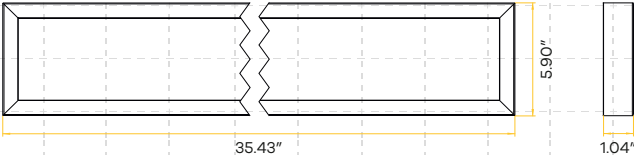

G-12064

