Glimmer Surface Mount

Selectable Color | CRI 90+ True Colors | Wet Location | Air Tight | 120° Beam Angle | Dimmable | IC Rated

JA8 TITLE 24

5″



G-48540

ED5/12W/R/LED/5CCT

White



G-48544

ED5/12W/R/LED/5CCT/BK

Black

Product Information

Color temp	27, 30, 35, 41, 50K	Output volts	36V DC
Output lumens	780	Dimmable	YES
Beam angle	120°	OD	4.78″
Input volts	120V	Height	1.50″
Wattage	12W	Packed	20
CRI	90>		

7″



G-48541

ED7/15W/R/LED/5CCT

White



G-48545

ED7/15W/R/LED/5CCT/BK

Black

Product Information

Color temp	27, 30, 35, 41, 50K	Output volts	36V DC
Output lumens	1350	Dimmable	YES
Beam angle	120°	OD	7.03″
Input volts	120V	Height	2.05″
Wattage	15W	Packed	12
CRI	90>		

9″



G-48542

ED9/18W/R/LED/5CCT

White

Product Information

Color temp	27, 30, 35, 41, 50K	Output volts	36V DC
Output lumens	1550	Dimmable	YES
Beam angle	120°	OD	8.28″
Input volts	120V	Height	2.05″
Wattage	18W	Packed	12
CRI	90>		

11″



G-48547

ED11/20W/R/LED/5CCT

Black

Product Information

Color temp	27, 30, 35, 41, 50K	Output volts	36V DC
Output lumens	2000	Dimmable	YES
Beam angle	120°	OD	11.11″
Input volts	120V	Height	2.05″
Wattage	20W	Packed	8
CRI	90>		

Accessories




Emergency LED Driver


15W G-48410
25W G-95525
30W G-48411
60W G-95521

Dimensions


G-48540 G-48544 5″

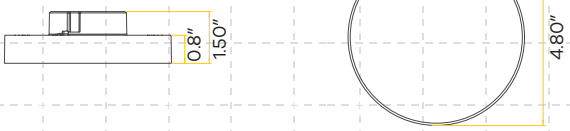

G-48541 G-48545 7″

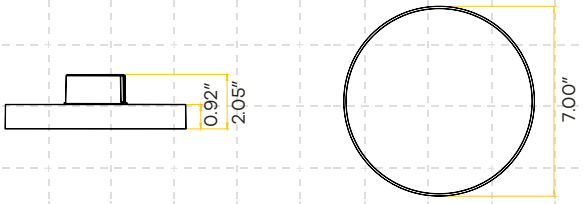

G-48542 9″

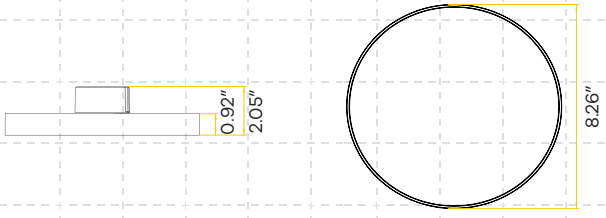

G-48547 11″

