


Neptune Backlit Flat Panel



Product Information

Description	NP/BP/1X4/50W/WS3/5CCT	CRI	80>
Color temp	30, 35, 41, 50, 65K	Dimmable	0-10V Dimmable
Output lumens	3750/5000/6250	Dimensions	11.73" X 47.60"
Beam angle	120°	Height	1.18"
Input volts	120/277V	Warranty	5 years
Wattage	30/40/50W	Packed	1



Product Information

Description	NP/BP/2X2/50W/WS3/5CCT	CRI	80>
Description EM	NP/BP/2X2/50W/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.70" X 23.70"
Output lumens	3750/5000/6250	Height	1.18"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	30/40/50W		



Product Information

Description	NP/BP/2X4/70W/WS3/5CCT	CRI	80>
Description EM	NP/BP/2X4/70W/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.70" X 47.60"
Output lumens	6250/7500/8750	Height	1.18"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	50/60/70W	Packed	1

Only compatible with G-11920




Emergency LED Driver

15W G-48410
25W G-95525
30W G-48411
60W G-95521

Note: Emergency batteries must equal or exceed the fixture's maximum wattage. Keep in mind that these fixtures feature selectable wattage.

Accessories



Surface Kit

For 2x2 troffer use G-98222
For 2x4 troffer use G-98224



Flange Kit

For 2x2 troffer use G-48305
For 2x4 troffer use G-48307

Only compatible with G-11929 and G-11928



Smart Motion Sensor
G-98210




Motion Sensor
G-98211




Controller
G-98212

Dimensions


G-11920

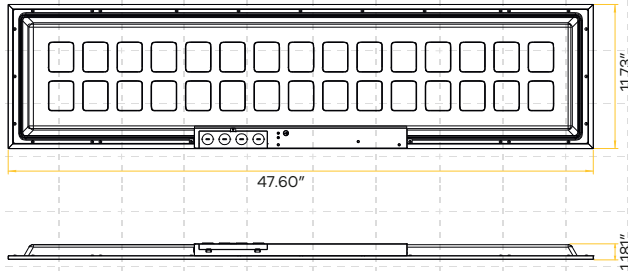


G-11921

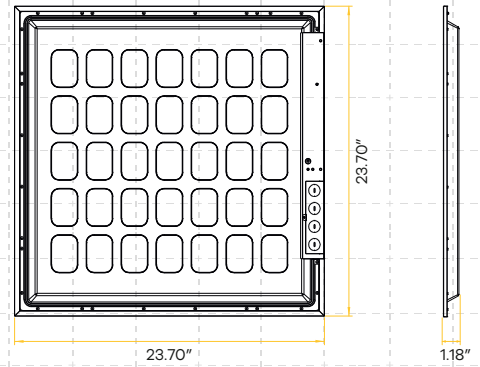

G-11928 EM

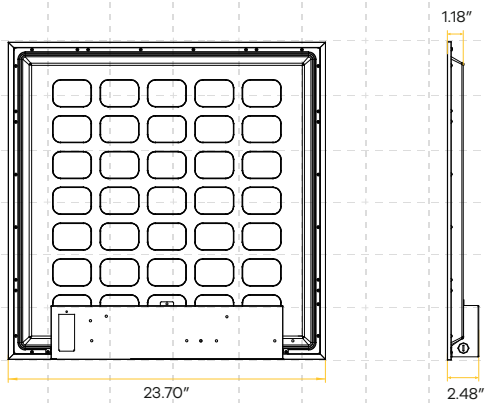

G-11922

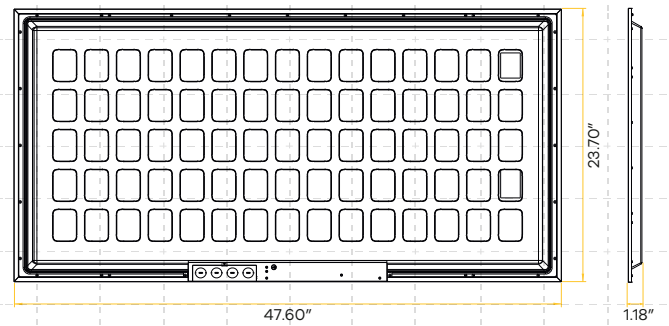

G-11929 EM

