

Neptune Bevel Troffer



Selectable Color



CRI 80+ True Colors



Damp Location



120° Beam Angle



Dimmable




Wattage Selectable



2' x 2'

G-98322

G-98323 EM

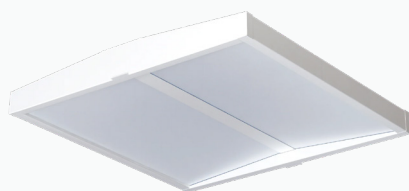

Product Information

Description	F/2X2/50W/BT/WS3/5CCT	CRI	80>
Description EM	F/2X2/50W/BT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23,74" X 23,74"
Output lumens	5671/4730/3335	Height	2.63"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	2
Wattage	30W/40W/50W		

2' x 4'

G-98324


G-98325 EM



Product Information

Description	F/2X4/72W/BT/WS3/5CCT	CRI	80>
Description EM	F/2X4/72W/BT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	47,75" x 23,70"
Output lumens	5775/6780/7685	Height	2.63"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	50W/60W/72W		

Accessories



Surface Kit

For 2x2 use G-98222
For 2x4 use G-98222




Flange Kit

For 2x2 use G-48305
For 2x4 use G-48305

Dimensions

G-98322

G-98323 EM

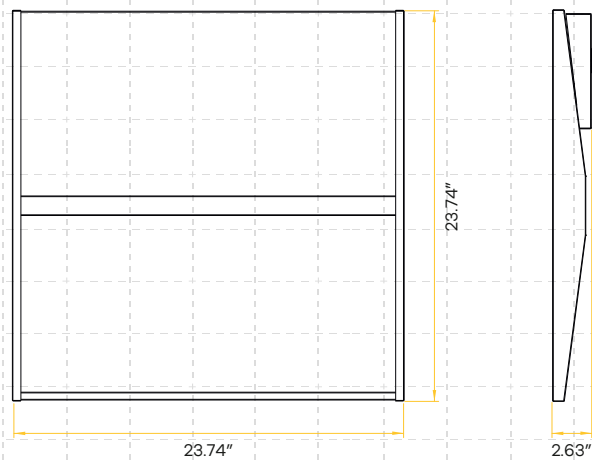

G-98324

G-98325 EM

