Neptune Butterfly Troffer

Selectable Color | CRI 80+ True Colors | Damp Location | 120° Beam Angle | Dimmable | Wattage Selectable

2′ x 2′ **G-98424** **G-98425 EM**



Product Information

Description	F/2X2/50W/BRT/3WS/5CCT	CRI	80>
Description EM	F/2X2/50W/BRT/3WS/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.70″ X 23.70″
Output lumens	3750/3900/5350	Height	2.75″
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	2
Wattage	30/40/50W		

2′ x 4′ **G-98426** **G-98427 EM**



Product Information

Description	F/2X4/72W/BRT/3WS/5CCT	CRI	80>
Description EM	F/2X4/72W/BRT/3WS/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.70″ X 47.75″
Output lumens	5775/6850/7400	Height	2.75″
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	50/60/72W		

Accessories



Surface Kit
For 2x2 troffer use G-98222
For 2x4 troffer use G-98224




Flange Kit
For 2x2 troffer use G-48305
For 2x4 troffer use G-48307

Made In China
Goodlite Products. Tinton Falls NJ 07753.

Dimensions

G-11920 **G-98425 EM**

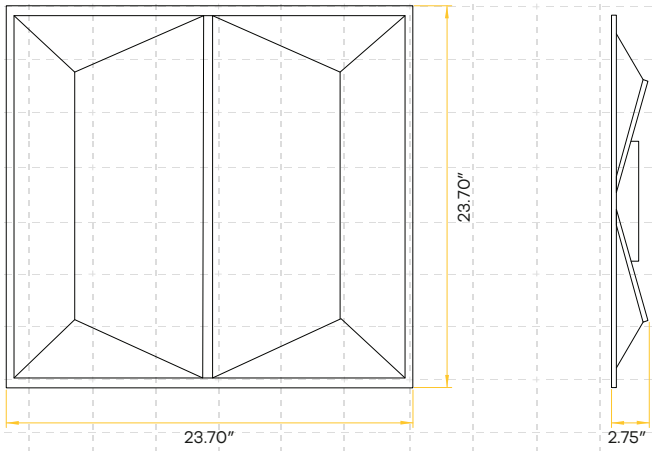

G-98426 **G-98427 EM**

