



Neptune Center Indirect Troffer



2' x 2'

G-98126

G-98127 EM



Product Information

Description	F/2X2/50W/CI/WS3/4CCT	CRI	80>
Description EM	F/2X2/50W/CI/WS3/4CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50K	Dimensions	23.74" x 23.74"
Output lumens	3310/4535/5360	Height	3.54"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	30/40/50W		

2' x 4'

G-98128


G-98129 EM



Product Information

Description	F/2X4/72W/CI/WS3/5CCT	CRI	80>
Description EM	F/2X4/72W/CI/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.74" x 47.76"
Output lumens	5400/6615/7780	Height	3.54"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	50/60/72W		

Accessories



Surface Kit

For 2x2 troffer use G-98222
For 2x4 troffer use G-98224




Flange Kit

For 2x2 troffer use G-48305
For 2x4 troffer use G-48307

Dimensions

G-98126

G-98127 EM

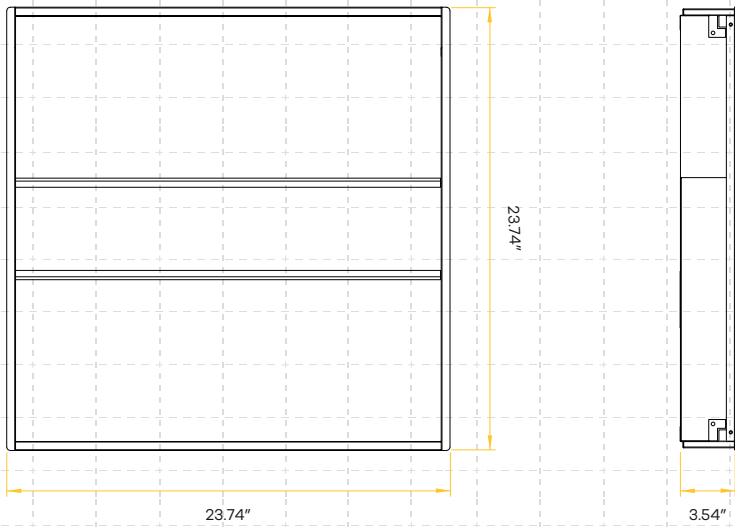

G-98128

G-98129 EM

