

NEPTUNE

REMOTE CONTROL



G-98212

ITEM	G-98212
WORKING VOLTAGE	AAA battery * 2pcs (2.2-3V)
SCREEN OFF DURATION	60S
ICON FLICKING DURATION	5S
S(START) BUTTON ON DURATION	10S
M(MEMORY) BUTTON FLICKING DURATION	3S
CARRIER FREQUENCY	38KHz±2KHz
OPERATION DISTANCE MAX.	15M/49ft (3V)
EMISSION ANGLE	< 30 degree
STANDBY CURRENT	<1.2uA
WORKING CURRENT	<5mA
PEAK CURRENT	<30mA
WORKING TEMP	-20°C~+60°C
STORAGE TEMP	-30°C~+85°C

COMPATIBLE WITH


Backlit Vault Fixtures

Indirect Single Vault Fixtures

Indirect Double Vault Fixtures

Indirect Center Net Basket Fixtures

Square Center Basket Fixtures

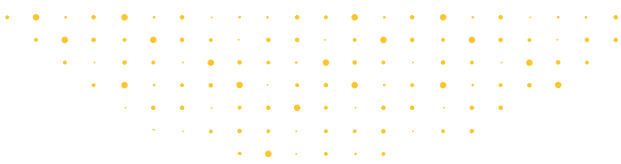

Dimensions

