


Neptune Focused Troffer




Selectable Color




CRI 80+ True Colors



Damp Location



120° Beam Angle



Dimmable



Wattage Selectable



2' x 2'

G-98226

G-98227 EM



Product Information

Description	F/2X2/50W/FT/WS3/5CCT	CRI	80>
Description EM	F/2X2/50W/FT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.74" x 23.74"
Output lumens	3275/4275/5300	Height	2.63"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	2
Wattage	30/40/50W		

2' x 4'

G-98228

G-98229 EM



Product Information

Description	F/2X4/70W/FT/WS3/5CCT	CRI	80>
Description EM	F/2X4/70W/FT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.74" x 47.75"
Output lumens	5580/6950/7925	Height	2.63"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	50/60/72W		

Accessories



Surface Kit

For 2x2 troffer use G-98222
For 2x4 troffer use G-98224




Flange Kit

For 2x2 troffer use G-48305
For 2x4 troffer use G-48307

Dimensions

G-98226

G-98227 EM

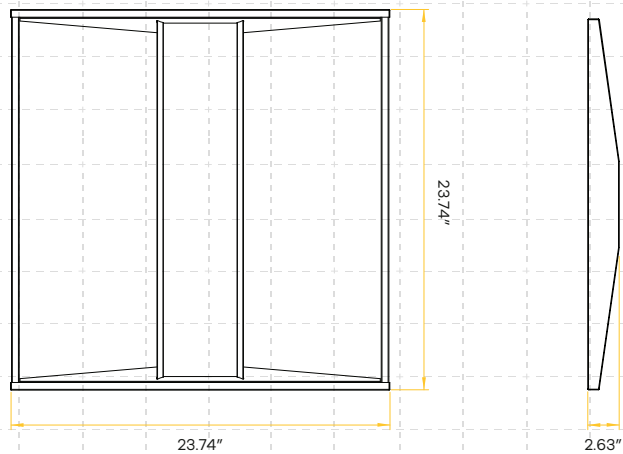

G-98228

G-98229 EM

