

Neptune Indirect Double Vault Troffer



Selectable Color



CRI 80+ True Colors



Damp Location



120° Beam Angle



Dimmable



Wattage Selectable



Motion Sensor



App Compatible



2' x 2'

G-98260

G-98261 EM



Product Information

Description	F/2X2/50W/IND/2-VLT/WS3/5CCT	CRI	80>
Description EM	F/2X2/50W/IND/2-VLT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.7" X 23.7"
Output lumens	3450/4600/5750	Height	3.94"
Beam angle	120°	UGR	22
Input volts	120/277V	Warranty	5 years
Wattage	30/40/50W	Packed	2

2' x 4'

G-98262


G-98263 EM



Product Information

Description	F/2X4/70W/IND/2-VLT/WS3/5CCT	CRI	80>
Description EM	F/2X4/70W/IND/2-VLT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.7" X 47.72"
Output lumens	5750/6900/8050	Height	3.94"
Beam angle	120°	UGR	22
Input volts	120/277V	Warranty	5 years
Wattage	50/60/70W	Packed	1

Accessories



Surface Kit
For 2x2 troffer use G-98222
For 2x4 troffer use G-98224



Flange Kit
For 2x2 troffer use G-48305
For 2x4 troffer use G-48307



Smart Motion Sensor
G-98210



Motion Sensor
G-98211




Controller
G-98212

Dimensions

G-98260

G-98261 EM

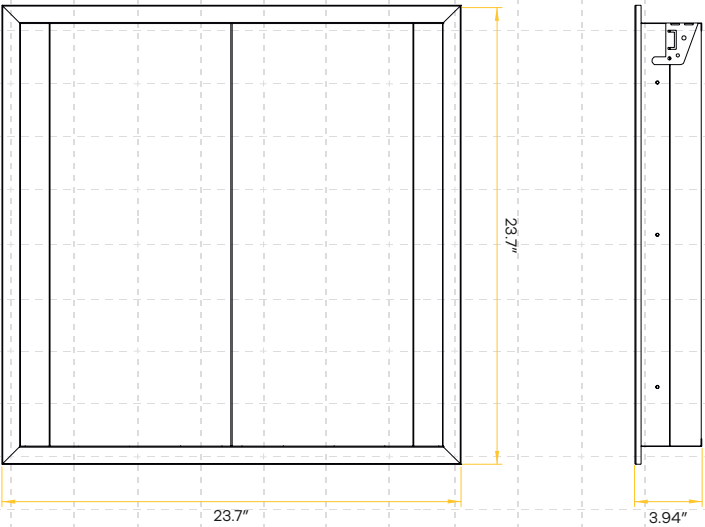

G-98262

G-98263 EM

