

Neptune Regress Panel



Selectable Color



CRI 80+ True Colors



Damp Location



120° Beam Angle



Dimmable



Wattage Selectable



2' x 2'

G-98326

G-98327 EM



Product Information

Description	F/2X2/50W/RT/WS3/5CCT	CRI	80>
Description EM	F/2X2/50W/RT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.67" x 23.67"
Output lumens	3275/4550/5300	Height	3.06"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	2
Wattage	30/40/50W		

2' x 4'

G-98328


G-98329 EM



Product Information

Description	F/2X4/70W/RT/WS3/5CCT	CRI	80>
Description EM	F/2X4/70W/RT/WS3/5CCT/EM	Dimmable	0-10V Dimmable
Color temp	30, 35, 41, 50, 65K	Dimensions	23.67" x 47.75"
Output lumens	5625/6500/7275	Height	3.06"
Beam angle	120°	Warranty	5 years
Input volts	120/277V	Packed	1
Wattage	50/60/72W		

Accessories



Surface Kit

For 2x2 troffer use G-98222
For 2x4 troffer use G-98224




Flange Kit

For 2x2 troffer use G-48305
For 2x4 troffer use G-48307

Dimensions

G-98326

G-98327 EM

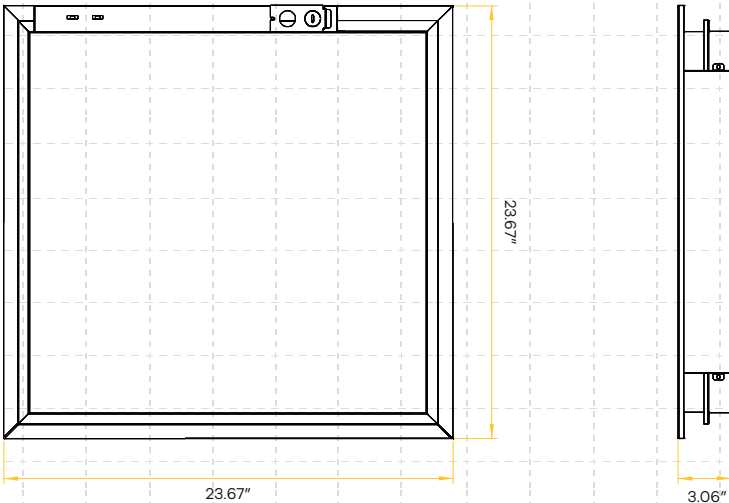

G-98328

G-98329 EM

